


## Suppression Capacitors, (Bi-polar) Capacitors Class X1/Y2 AC 275V/250V


### TECHNICAL DATA:

See page 73 (Document Number 27001)

### CIRCUIT DIAGRAM:

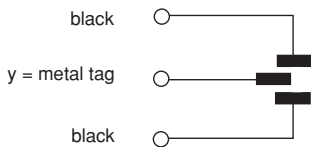

Dimensions in mm

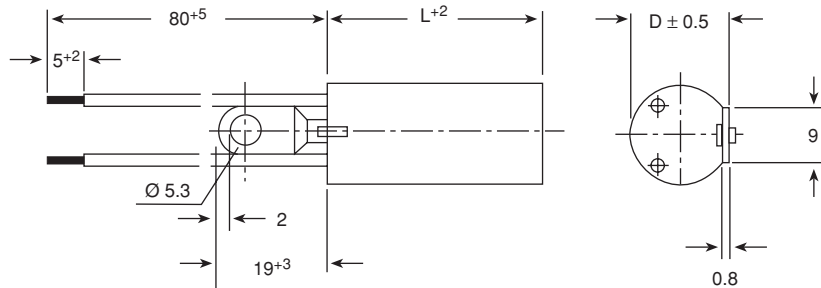

### TERMINALS:

Y-contact as metal tag with a hole of  $\varnothing 5.3\text{mm}$  ( $\varnothing 4.3\text{mm}$  on request) X-connection as: insulated stranded copper wire, type LiY  $0.5\text{mm}^2$  (or AWG 20) ends stripped and tinned, or insulated solid copper wire, type YV ( $d = 0.8\text{mm}$ ) on request.

### COATING:

Plastic case, epoxy resin sealed, flame retardant, UL-class 94V-0

### RATED VOLTAGE:

AC 275V, 50/60Hz  $\Rightarrow$  X1  
AC 250V, 50/60Hz  $\Rightarrow$  Y2

CAPACITANCE X-Value	CAPACITANCE Y-Value	DIMENSIONS D x L (mm)	WEIGHT (g)	QUANTITY PACKAGE (pcs)	ORDERING CODE*
0.022 $\mu\text{FX1}$	2 x 2700 pFY2	14 x 35	10.3	400	F1740-322-3550
0.027 $\mu\text{FX1}$	2 x 2700 pFY2	14 x 35	10.3	400	F1740-327-3550
0.033 $\mu\text{FX1}$	2 x 2700 pFY2	14 x 35	10.4	400	F1740-333-3550
0.047 $\mu\text{FX1}$	2 x 2700 pFY2	14 x 35	10.6	400	F1740-347-3550
0.068 $\mu\text{FX1}$	2 x 2700 pFY2	14 x 35	10.7	400	F1740-368-3550
0.1 $\mu\text{FX1}$	2 x 2700 pFY2	16 x 35	13.7	300	F1740-410-3550
0.15 $\mu\text{FX1}$	2 x 2700 pFY2	18 x 35	17.2	250	F1740-415-3550
0.22 $\mu\text{FX1}$	2 x 2700 pFY2	20 x 35	22.1	250	F1740-422-3550
0.27 $\mu\text{FX1}$	2 x 2700 pFY2	20 x 50	26.8	200	F1740-427-3550
0.33 $\mu\text{FX1}$	2 x 2700 pFY2	20 x 50	28.3	200	F1740-433-3550
0.47 $\mu\text{FX1}$	2 x 2700 pFY2	20 x 50	44.2	150	F1740-447-3550
0.027 $\mu\text{FX1}$	2 x 4700 pFY2	14 x 35	9.6	400	F1740-327-3558
0.033 $\mu\text{FX1}$	2 x 4700 pFY2	14 x 35	9.8	400	F1740-333-3558
0.047 $\mu\text{FX1}$	2 x 4700 pFY2	14 x 35	10.0	400	F1740-347-3558
0.068 $\mu\text{FX1}$	2 x 4700 pFY2	14 x 35	10.1	400	F1740-368-3558
0.1 $\mu\text{FX1}$	2 x 4700 pFY2	16 x 35	13.7	300	F1740-410-3558
0.15 $\mu\text{FX1}$	2 x 4700 pFY2	18 x 35	17.2	250	F1740-415-3558
0.22 $\mu\text{FX1}$	2 x 4700 pFY2	20 x 35	22.0	250	F1740-422-3558
0.27 $\mu\text{FX1}$	2 x 4700 pFY2	20 x 50	27.0	200	F1740-427-3558
0.33 $\mu\text{FX1}$	2 x 4700 pFY2	20 x 50	28.5	200	F1740-433-3558
0.47 $\mu\text{FX1}$	2 x 4700 pFY2	20 x 50	44.2	150	F1740-447-3558

\*With mark, the ordering code is F1740-...-345.



# F1740-3550 and F1740-3558


Supp. Cap. (Bi-polar) Class X1/Y2 AC 275V/250V Vishay Roederstein

## APPROVALS

COUNTRY	SPECIFICATION	ELECTRICAL VALUES	APPROVAL REFERENCE	APPROVAL MARK
U.S.A. (for AC 250V)	UL 1283	0.022 $\mu$ FX - 0.47 $\mu$ FX + 2 x 2700pFY - 2 x 0.027 $\mu$ FY	E 76297	
<b>CB TEST-CERTIFICATE</b>		0.022 $\mu$ FX1 - 0.47 $\mu$ FX1 + 2 x 2700pFY2 - 2 x 0.027 $\mu$ FY2	CH-676-A1	
Switzerland (for AC 275/250V)	EN 132 400 IEC 60384-14, 2nd edition	0.022 $\mu$ FX1 - 0.47 $\mu$ FX1 + 2 x 2700pFY2 - 2 x 0.027 $\mu$ FY2	96.1 10036.02	
This approval mark together with the CB-Certificate replace all national approval marks of the following countries (they have already signed the CB-Agreement):				
Austria	Belgium	Denmark	Finland	Sweden
France	Germany	Ireland	Italy	Switzerland
Netherlands	Israel	Portugal	Spain	Great Britain
Japan	Norway	China	Poland	Czech. Republic
Singapore	Rep. of Korea	Hungary	Iceland	Slovenia

Impedance (Z) of F1740-3550/3450 as a function of frequency (f) at  $T_a = 20^\circ\text{C}$  (Average)

Measurement with lead length:  
 x - connection 50mm  
 y - connection metal tag

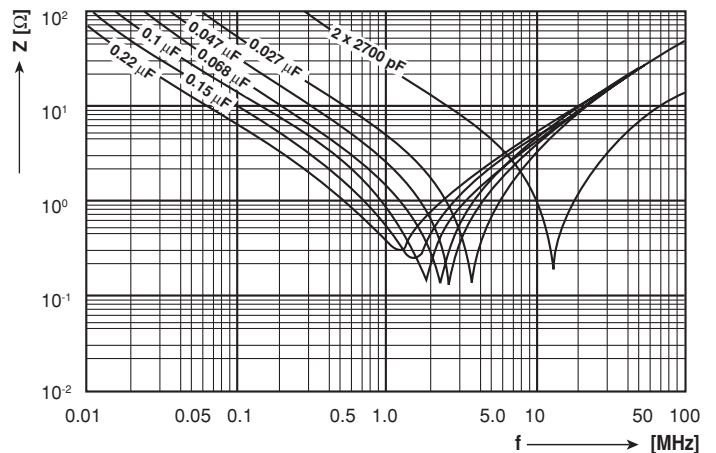



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.