SMD260F-2 Product Details - Tyco Electronics

Skip to content

<u>Corporate Home</u> | ▶ Electronic Components | <u>Segments</u> | <u>Who We Are</u>



Languages

- English
- Français
- Deutsch
- <u>Italiano</u>
- Español
- 日本語
- -----
- 中文(简体)
- Português (do Brasil)
- _____
- Magyar
- <u>•esky</u>
- Polski

Country Sites

• Japan

Worldwide





Our commitment. Your advantage.

Search

By:




SMD260F-2 Product Details - Tyco Electronics Sign In | Register (Why Register?) **Products** Connectors Electromechanical Components **Electronic Modules** Fiber Optics Filters **Identification Labeling Products** Passive Components **Power Sources** RF & Microwave Products **Tooling Products** Touch Screen Displays Tubing, Molded and Harnessing Products Wire, Cable and Cable Assemblies List all Product Types Aerospace & Defense Appliance Automotive Communications Computer & Consumer Electronics Industrial & Commercial Instrumentation & Medical Equipment By Brand A to Z **Documentation** Find

Documents & Drawings



SMD260F-2 Product Details

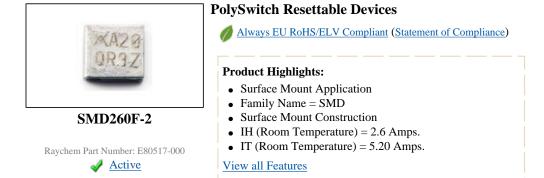

Quick Links

- Check
 Pricing &
 Availability
- Search for Tooling
- Product
 Feature
 Selector
- Contact Us
 About This
 Product

Documentation & Additional Information

Product Drawings:

• SMD260F (PDF, English)

Catalog Pages/Data Sheets:

• None Available

Product Specifications:

• None Available

Application Specifications:

• None Available

Instruction Sheets:

• None Available

CAD Files:

• None Available

Additional Information:

• Product Line Information

Related Products:

• Tooling

List all Documents

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

• UL Recognized = 191099-E74889

Electrical Characteristics:

- IH (Room Temperature) (Amps.) = 2.6
- <u>IT (Room Temperature) (Amps.)</u> = 5.20
- Vmax Operating (V) = 6
- $\underline{\text{Rmin}()} = 0.025$
- R1 Max [Post Trip] () = 0.075
- <u>UL Rated Current (Amps.)</u> = 40
- Tripped Power Dissipation (Typical) (W) = 1.70

Configuration Related Features:

- Form Factor (inches) = 2920
- Form Factor (mm) = 7555

Industry Standards:

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- <u>Lead Free Solder Processes</u> = Reflow solder capable to 245°C, Reflow solder capable to 260°C
- RoHS/ELV Compliance History = Always was RoHS compliant
- TUV Certificate No. = R72041427

Conditions for Usage:

• Operating Temperature (Max.) (°C) = 85

Termination Related Features:

SMD260F-2 Product Details - Tyco Electronics

• Construction = Surface Mount

Body Related Features:

• CSA File No. = 1031175 (CA 78165-1)

Contact Related Features:

• Family Name = SMD

Operation/Application:

• Application = Surface Mount

Packaging Related Features:

• Packaging Method = Tape & Reel

Other:

• Brand = Raychem

<u>Provide Website Feedback | Contact Customer Support</u>

<u>Home | Customer Support | Suppliers | Site Map | Privacy Policy | Browser Support</u>

© 2007 Tyco Electronics Corporation All Rights Reserved