

Wirewound Resistors, Industrial Power, Adjustable Tapped Tubular



FEATURES

- Adjustable resistor or voltage divider
- High temperature silicon coating
- Can be used to quickly obtain odd resistance values
- One or more adjustable lugs can be provided for voltage divider applications
- Can be used as multi-tap resistor



RoHS*
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS				
GLOBAL MODEL	HISTORICAL MODEL	POWER RATING $P_{25\text{ }^\circ\text{C}}$ W	RESISTANCE RANGE Ω	WEIGHT (typical) g
			$\pm 5\%$	
HLA012	HLA-12	12	1.0 - 10K	6.69
HLA020	HLA-20	20	1.0 - 18K	12.57
HLA025	HLA-25	25	1.0 - 23K	20.72
HLA026	HLA-26	26	1.0 - 31K	15.34
HLA050	HLA-50	50	1.0 - 57K	42.08
HLA051	HLA-51	51	1.0 - 95K	51.96
HLA060	HLA-60	60	1.0 - 74K	65.64
HLA065	HLA-65	65	1.0 - 130K	64.82
HLA080	HLA-80	80	1.0 - 111K	121.58
HLA100	HLA-100	100	1.0 - 132K	91.37
HLA120	HLA-120	120	1.0 - 180K	183.82
HLA130	HLA-130	130	1.0 - 192K	192.36
HLA160	HLA-160	160	1.0 - 249K	245.86
HLA175	HLA-175	175	1.0 - 398K	250.80
HLA225	HLA-225	225	1.0 - 337K	309.97

TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	HLA RESISTOR CHARACTERISTICS
Temperature Coefficient	ppm/ $^\circ\text{C}$	± 90 for 0.1 Ω to 0.99 Ω ; ± 50 for 1 Ω to 9.9 Ω ; ± 30 for 10 Ω and above
Short Time Overload ⁽¹⁾	-	10 x rated power for 5 s
Maximum Working Voltage	V	$(P \times R)^{1/2}$
Operating Temperature Range	$^\circ\text{C}$	- 55 to + 350

Note

⁽¹⁾ Short Time Overload is rated without adjustable lug attached.

MATERIAL SPECIFICATIONS

Element: Copper-nickel alloy or nickel-chrome alloy, depending on resistance range

Core: Ceramic, steatite

Coating: Special high temperature silicone

Standard Terminals: Model "Z" terminals are tinned steel

Terminal Bands: Steel


Part Marking: DALE, model, wattage, value, tolerance, date code

GLOBAL PART NUMBER INFORMATION												
New Global Part Numbering: HLA22507Z200R0J (preferred part number format)												
GLOBAL MODEL	TERMINAL DESIGNATION	TERMINAL FINISH	RESISTANCE VALUE	TOLERANCE	PACKAGING CODE	SPECIAL						
HLA225 (See "Standard Electrical Specifications" table above for additional P/N's)	02 05 06 07 14 15	E = Lead (Pb)-free Z = Tin/lead N = Nickel	R = Decimal K = Thousand 10R00 = 10.0 Ω 1K000 = 1 k Ω	J = 5.0 % K = 10.0 %	E = Lead (Pb)-free skin pack J* = Skin pack (J01)	(Dash Number) (up to 2 digits) From 1 - 99 as applicable						
Historical Part Number Example: HLA-225-07Z 200 Ω 5% J01 (will continue to be accepted)												
HLA-225	07Z	200 Ω	5%	J01								
HISTORICAL MODEL	TERMINAL/FINISH	RESISTANCE VALUE	TOLERANCE	PACKAGING								

* Pb containing terminations are not RoHS compliant, exemptions may apply

DIMENSIONS


GLOBAL MODEL	DIMENSIONS in inches [millimeters]									
	A (max.)	CORE DIMENSIONS			TERMINAL SETBACK ± 0.031 [0.79]	DISTANCE BETWEEN TERMINALS (REF.)	TERMINAL DESIGNATION		ADJ. SLIDER	MOUNTING HARDWARE OPTIONS
		LENGTH ± 0.063 [1.59]	O.D.	I.D. ± 0.031 [0.79]			STANDARD	OPTIONAL		
HLA012	0.406 [10.32]	1.750 [44.45]	0.313 [7.94]	0.188 [4.76]	0.094 [2.38]	1.187	05Z	14 N	70	101, 204, 301
HLA020	0.563 [14.29]	2.000 [50.80]	0.438 [11.11]	0.313 [7.94]	0.094 [2.38]	1.437	02Z	14 N	71	101, 203, 301
HLA025	0.688 [17.46]	2.000 [50.80]	0.563 [14.29]	0.313 [7.94]	0.094 [2.38]	1.312	06Z	15 N	72	101, 203, 301
HLA026	0.563 [14.29]	3.000 [76.20]	0.438 [11.11]	0.313 [7.94]	0.094 [2.38]	2.437	02Z	14 N	71	101, 203, 301
HLA050	0.688 [17.46]	4.000 [101.60]	0.563 [14.29]	0.313 [7.94]	0.094 [2.38]	3.312	06Z	15 N	72	101, 203, 301
HLA051	0.906 [23.02]	3.500 [88.90]	0.750 [19.05]	0.500 [12.70]	0.125 [2.38]	2.75	06Z	15 N	73	102, 206, 303
HLA060	0.906 [23.02]	4.000 [101.60]	0.750 [19.05]	0.500 [12.70]	0.125 [2.38]	3.250	06Z	15 N	73	102, 206, 303
HLA065	0.906 [23.02]	4.500 [114.30]	0.750 [19.05]	0.500 [12.70]	0.125 [2.38]	3.750	06Z	15 N	73	102, 206, 303
HLA080	1.313 [33.34]	4.000 [101.60]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	2.812	07Z	15 N	74	103, 205, 303
HLA100	0.906 [23.02]	6.500 [165.10]	0.750 [19.05]	0.500 [12.70]	0.125 [2.38]	5.750	06Z	15 N	73	102, 206, 303
HLA120	1.313 [33.34]	6.000 [152.40]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	4.812	07Z	15 N	74	103, 205, 303
HLA130	1.313 [33.34]	6.500 [165.10]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	5.312	07Z	15 N	74	103, 205, 303
HLA160	1.313 [33.34]	8.000 [203.20]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	6.812	07Z	15 N	74	103, 205, 303
HLA175	1.313 [33.34]	215.90 [8.500]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	7.312	07Z	15 N	74	103, 205, 303
HLA225	1.313 [33.34]	10.500 [266.70]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	9.312	07Z	15 N	74	103, 205, 303



(Includes Coating and Terminal Band)

Moving Adjustable Lugs: The coating protects the resistance wire from shifting and shorting to other turns during adjustment. However, the following three steps should always be taken whenever adjustments are made:

- (1) Turn off power to avoid possible operator injury and damage to the unit.
- (2) Loosen adjustable lug until it will slide completely free, without touching the exposed wire.
- (3) When adjustment point has been selected, retighten lug only enough to assure a firm contact, do not tighten beyond this point. Failure to follow these three steps in order can result in damage to the resistor.



SLIDER MODEL NUMBER	WIDTH	HEIGHT	HOLE DIAMETER
70	0.188 [4.76]	0.516 [13.10]	0.125 [3.18]
71	0.250 [6.35]	0.594 [15.08]	0.156 [3.96]
72	0.250 [6.35]	0.719 [18.26]	0.141 [3.58]
73	0.250 [6.35]	0.781 [19.84]	0.141 [3.58]
74	0.313 [7.94]	0.781 [19.84]	0.170 [4.32]

TERMINAL DIMENSIONS



DIMENSION	TERMINAL TYPE					
	02	05	06	07	14	15
A	0.188 [4.76]	0.188 [4.76]	0.250 [6.35]	0.375 [9.53]	0.188 [4.76]	0.250 [6.35]
B	0.406 [10.32]	0.438 [11.118]	0.563 [14.29]	0.625 [15.88]	0.563 [14.29]	0.594 [15.08]
C	0.093 [2.36]	0.104 [2.64]	0.166 [4.22]	0.173 [4.39]	0.050 [1.27]	0.065 [1.65]
D	0.020 [0.51]	0.020 [0.51]	0.020 [0.51]	0.020 [0.51]	0.020 [0.51]	0.031 [0.79]

TERMINAL FINISH

“E” Finish - 100 % Sn coated steel. “Z” Finish - 60/40 Sn/Pb coated steel. “N” Finish - Nickel coated steel. Finish for terminal style 14 and 15 is limited to nickel plated steel (N).

MOUNTING HARDWARE

HLA resistors use same mounting hardware as standard HL resistors, see HL data sheet for mounting hardware dimensions.

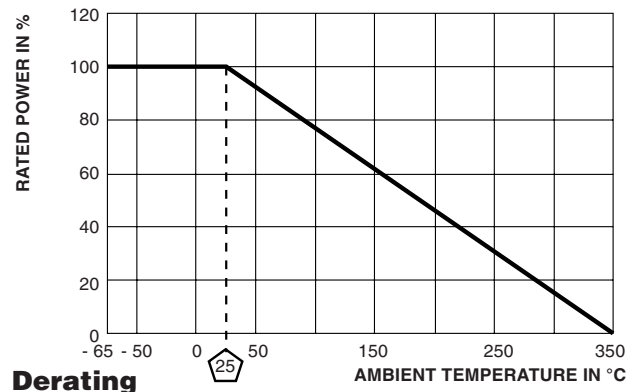



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.