

(2,54mm) .100"

SNT, MNT, JL, 2SN, PK, SNM SERIES


SHUNTS & JUMPERS

SPECIFICATIONS

SNT

For complete specifications see www.samtec.com?SNT

Insulator Material: Glass Filled Polyester
Contact Material: Phosphor Bronze
Current Rating: 2.5A
Operating Temp Range: -40°C to +90°C
Contact Resistance: 5 mΩ max
Insertion Depth: (4,32mm) .170" min.
Lead Size accepted: (0,64mm) .025" SQ
Insertion Force: (Single contact only) 33oz (9,17N) average
Withdrawal Force: (Single contact only) 27oz (7,51N) average
RoHS Compliant: Yes

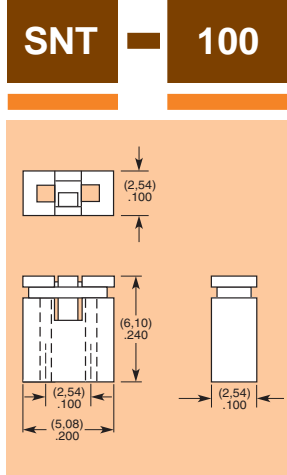

- 100**
- BODY COLOR**
- BK = Black
 - OR = Orange
 - RD = Red
 - BL = Blue
 - YW = Yellow

- PLATING OPTION**
- G = 10μ" (0,25μm) Gold
 - T = Tin


- HANDLE OPTION**
- H = Handle (Black Only)

Note: Other Gold plating options available. Contact Samtec.

MNT

For complete specifications see www.samtec.com?MNT

Same as SNT except:
Current Rating: 2A @ 80°C ambient
Working Voltage: 675 VAC

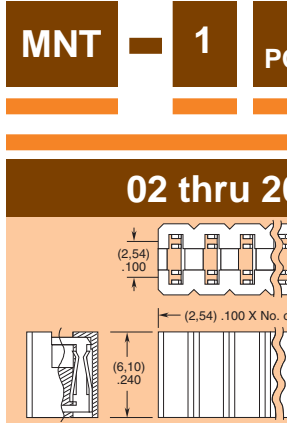

- 1**
- NO. OF POSITIONS**
- BODY COLOR**
- BK = Black

- PLATING OPTION**
- G = 10μ" (0,25μm) Gold
 - T = Tin

Note: Some lengths, styles and options are non-standard, non-returnable.

SNT/MNT mates with: TSW, MTSW, TLW, DW, EW, ZW, HW, TSM



2SN

For complete specifications see www.samtec.com?2SN

Same as SNT except:
Insertion Depth: (2,29mm) .090" minimum
Lead Size accepted: (0,51mm) .020" SQ



2SN mates with: TMMH, TMM, MTMM, MMT, TW, LTMM, ZLTMM, TMSH, TSH, EHT

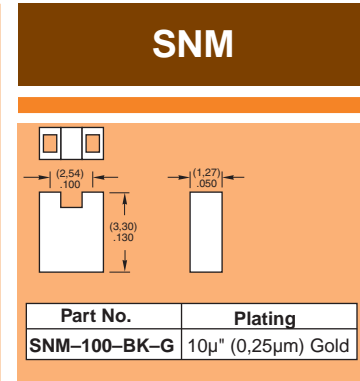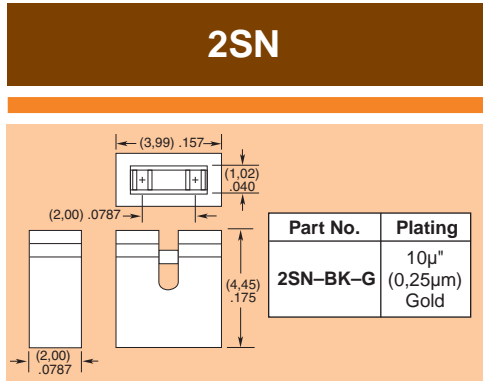

SNM

For complete specifications see www.samtec.com?SNM


Same as SNT except:
Contact Resistance: 10 mΩ max
Insertion Depth: (3,43mm) .135" minimum
Lead Size accepted: (0,46mm) .018" SQ

SNM mates with: TMS, MTMS, DWM


JL

For complete specifications see www.samtec.com?JL

Insulator Material: White Teflon per MIL-T-16878 Type E
Insulation Resistance: >10⁸ ohm-cm
Terminal Material: Tinned 22 ga Copper
Current Rating: 1.6 amp @ 60°C
Plating: Ag per MIL-QQW-343

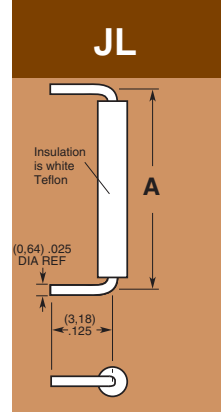

Part No.	A
JL-100-25-T	(2,54) .100
JL-250-25-T	(6,35) .250
JL-300-25-T	(7,62) .300
JL-400-25-T	(10,16) .400
JL-500-25-T	(12,70) .500
JL-600-25-T	(15,24) .600
JL-1000-25-T	(25,40) 1.000



Insulator Material: Natural Thermoplastic
Note: Order per wheel. 6 pins per wheel.

Part No.	A	B
PK-01-06	(0,64) .025 SQ	(5,84) .230
PK-01-07	(0,51) .020 SQ	(3,18) .125

-06 polarizes: SSW, SSQ, ESW, ESQ, IDSS, IDSD, SSM
-07 polarizes: SMM, TCSD

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC SILICON VALLEY • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329 SAMTEC UK • Tel: 44 01236 739292
 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
 SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-61103766
 SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112 SAMTEC ANZ • Tel: 613 9512 7747