
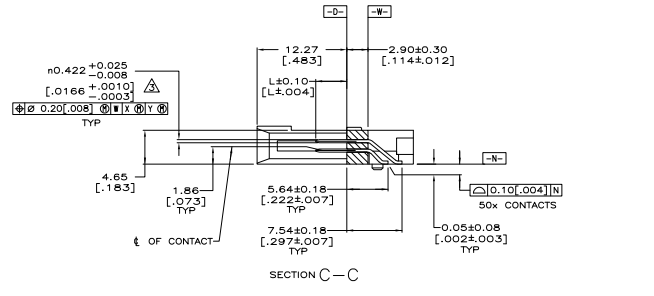
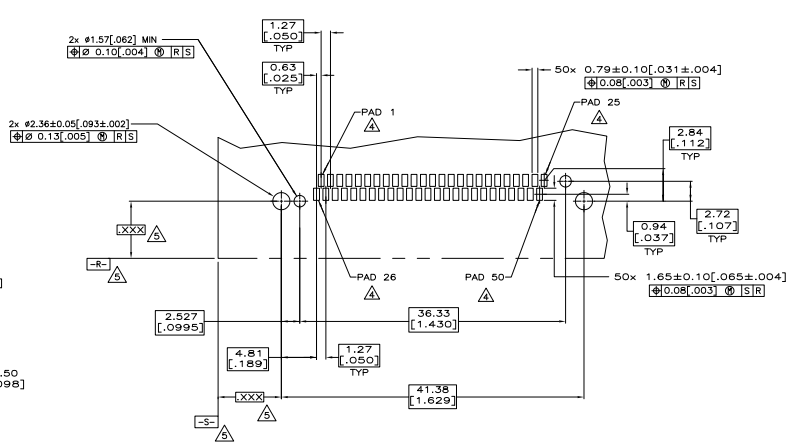


- △ HOUSING: POLYESTER LIQUID CRYSTAL, BLACK CONTACTS: BRASS.
- △ CONTACTS: 0.76 μm [0.00030] MIN GOLD FOR A LENGTH OF 3.50 [0.138] MIN FROM MATING END, 3.81 μm [0.00150] MIN TIN ON SOLDER TAILS, ALL OVER 1.27 μm [0.00050] MIN NICKEL.
- △ POSITION TOLERANCE APPLIES AT CONTACT TIP.
- △ POSITION NUMBERS SHOWN FOR REFERENCE ONLY.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6. CUSTOMER TO PROVIDE CARD GUIDANCE SYSTEM.
- 7. CONNECTOR REQUIRES USE OF 2 - SIZE 2M SCREWS FOR FASTENING TO PRINTED CIRCUIT BOARD.

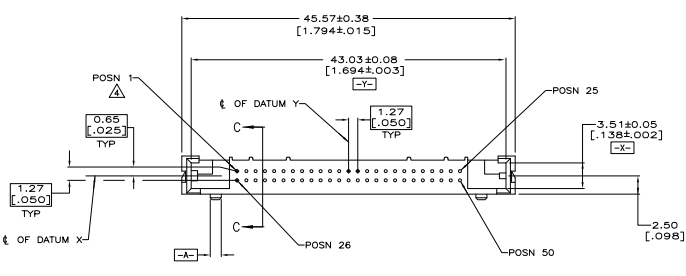

1, 13, 38, 50	ALL OTHER PINS	25, 26	5788667-1
5.00 [1.97]	4.25 [1.67]	3.50 [1.38]	PART NUMBER
"L" (PIN LENGTH) AND LOCATION			

THIS DRAWING IS A CONTROLLED DOCUMENT		REVISED BY	REVISED DATE	REVISED BY	REVISED DATE
DESIGNED BY	APPROVED BY	DESIGNED BY	APPROVED BY	DESIGNED BY	APPROVED BY
DATE	DATE	DATE	DATE	DATE	DATE
SIZE	DATE	DATE	DATE	DATE	DATE
CUSTOMER DRAWING	DATE	DATE	DATE	DATE	DATE