




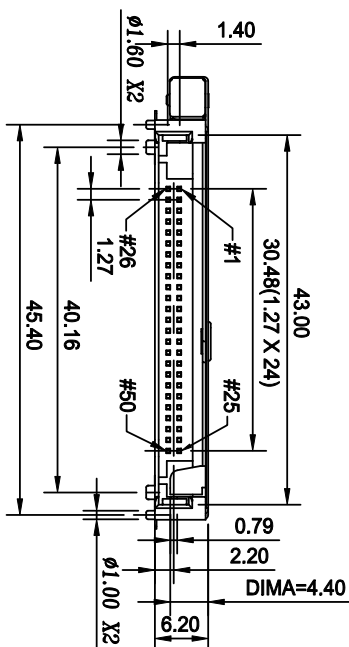


1 | 2

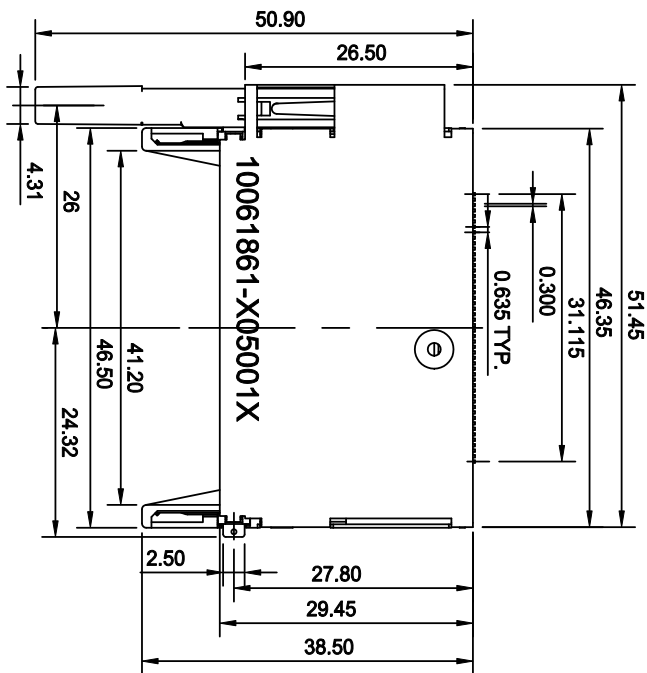

3 |

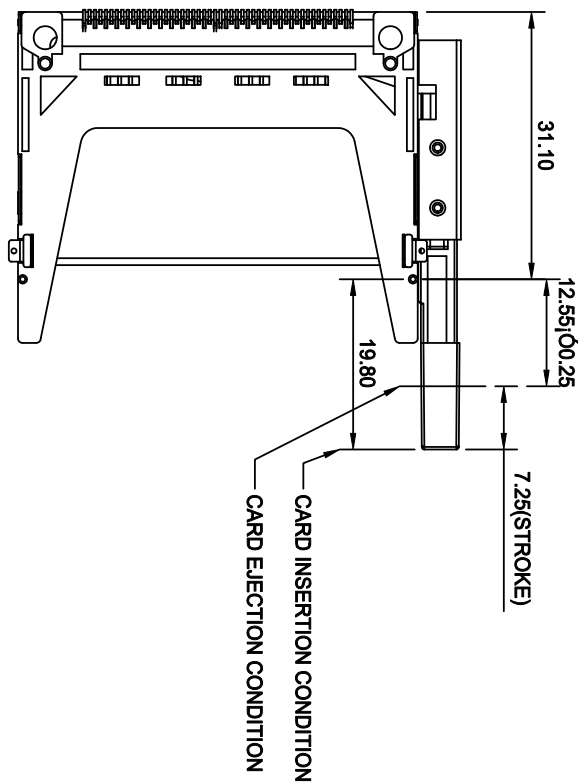

THE PUSH BUTTON POSITION

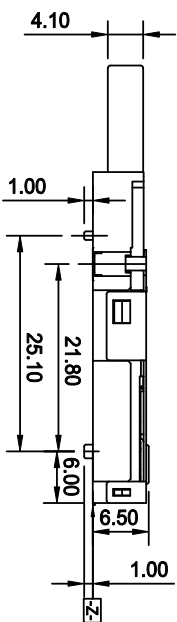


PIN NUMBER	DIM. L(PIN LENGTH)
25,26	3.50
ALL OTHER PINS	4.25
1, 13, 38, 50	5.00

1 | 2

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI		title		code	
litr	ecn no.	dr	date	linear	projection	MM	product family	size	dwg no	TWN	sheet
A	T06-0258	A.C.	11/21/05	.XX ± 0.20	⊕	NA	CF	A4	10061861	1	of 4
B	T06-0038	A.C.	3/02/06	.XXX ± 0.10	⊕	NA	CF	A4	10061861	1	of 4
C	T08-1173	S.LIN	10/12/08	0° ± 2°	⊕	NA	CF	A4	10061861	1	of 4
sheet index		revision	sheet	dr	chr	engr	chr	engr	chr	appd	index
1	2	C	C	C	C	C	C	C	C	C	C
ACAD		sheet		sheet		sheet		sheet		sheet	

3 |

4

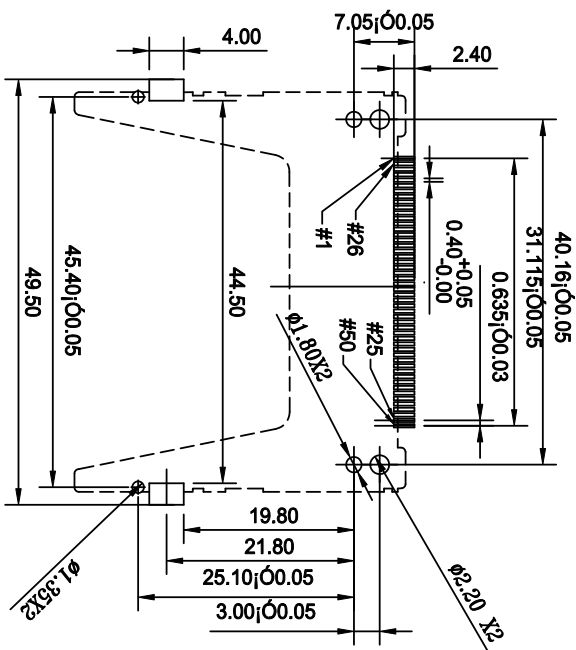

Recommended PCB Pattern

1 | 2

1 | 2

3 |

3 |

4

4

ACAD

code code

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI		title		code	
ltr	ecn no.	dr	date	linear	projection	MM	product family	size	dwg no	code	sheet
A	T06-0258	A.C.	11/21/05	.XX ± 0.20	⊕	MM	CF	A4	10061861	CF ASS'Y, ABOVE MOUNT, LEFT PUSH, S/O=0	TWN
B	T06-0038	A.C.	3/02/06	.XXX ± 0.10	⊕	MM	CF	A4	10061861	CF ASS'Y, ABOVE MOUNT, LEFT PUSH, S/O=0	3 of 4
C	T08-1173	S.LIN	10/12/08	0° ± 2°	⊕	MM	CF	A4	10061861	CF ASS'Y, ABOVE MOUNT, LEFT PUSH, S/O=0	3 of 4
sheet	revision	sheet	revision	sheet	revision	sheet	revision	sheet	revision	sheet	revision
index	sheet	index	sheet	index	sheet	index	sheet	index	sheet	index	sheet



1 | 2

NOTES :


1. THIS IS THE ASSEMBLY TYPE WHICH INCLUDES HEADER 10053867-E0501 AND EJECTOR 10053870-0150LF.
2. MATERIAL :
INSULATOR : HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING: UL94V-0
COLOR: IVORY
CONTACT : COPPER ALLOY
GROUND MOUNTING EAR: COPPER ALLOY
COVER: STAINLESS STEEL.
ARM: STAINLESS STEEL.
PUSH ROD : HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING: UL94V-0
COLOR: BLACK
RIVET : COPPER ALLOY
3. PLATING :
CONTACT AREA: SELECTIVE GOLD (SEE P/N DESCRIPTION)
UNDER PLATING: 50u" NICKEL OVERALL
SOLDER TAIL AREA: 100u" TIN/LEAD OR 100u" MATTE TIN
GROUND MOUNT EAR AREA: 100u" TIN/LEAD OR 100u" MATTE TIN
4. SOLDER TAILS TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANARITY OF SOLDER TAILS TO BE WITHIN 0.10mm.
5. PRODUCT SPEC: GS-12-240.
6. PACKAGING SPEC: GS-14-1040.

1 | 2

3 |

7. Part Number Description:

P/N: 10061861-X050 X 1 X

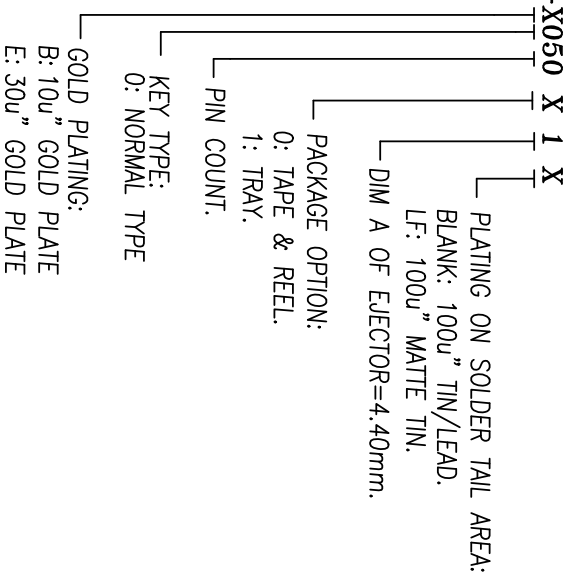

4

8. THIS PRODUCT (10061861-XXXXXXLF) MEETS THE EUROPEAN UNION DIRECTIVE AS DESCRIBED IN GS-22-008.
9. THIS PRODUCT (10061861-XXXXXX) MEETS THE EUROPEAN UNION DIRECTIVE AS DESCRIBED IN GS-22-008 EXCEPT FOR Pb.
10. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, IR OR VAPER PHASE REFLOW OVEN.
11. THE PRODUCTS WHERE THE PART NUMBER ENDS IN "LF" MEET THE CRITERIA SHOWN IN THE NOTES 8 AND 10.


mat'l. code	ecn no.	dr	date	tolerances unless otherwise specified	CUSTOMER COPY	title	product family	code
A	106-0258	A.C.	11/21/05	.X ± 0.30		CF ASS'Y, ABOVE MOUNT, LEFT PUSH, S/O=0	CF	TWN
B	106-0038	A.C.	3/02/06	.XXX ± 0.10				sheet 2 of 4
C	108-1173	S.LIN	10/12/08	0° ±2°				
		dr						
		engr						
		chr						
		appr						
sheet	revision	C	C	C				
index	sheet	1	2	3				

ACAD


3 |

4


1 | 2

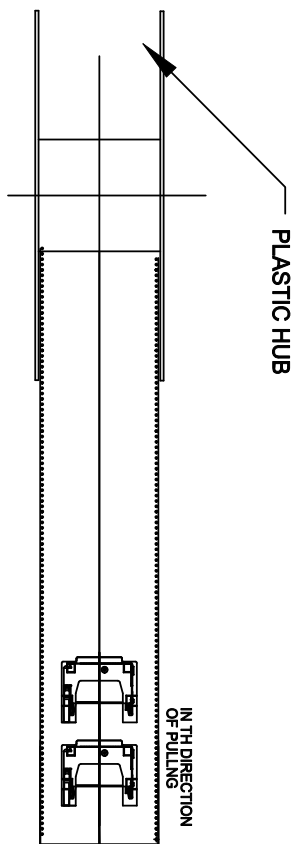

3 |

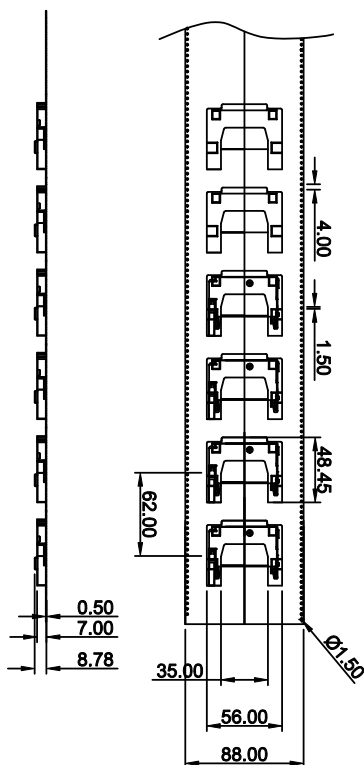


4

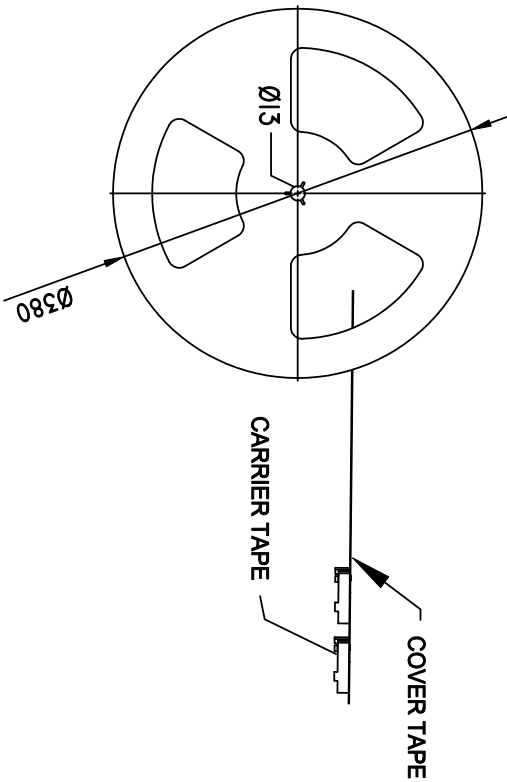

- NOTES:**
 1. CARRIER TAPE: PS T=0.4MM
 2. COVER TAPE: PE
 3. PLASTIC HUB: PS

1 | 2

COMPOSITION OF PACKAGING

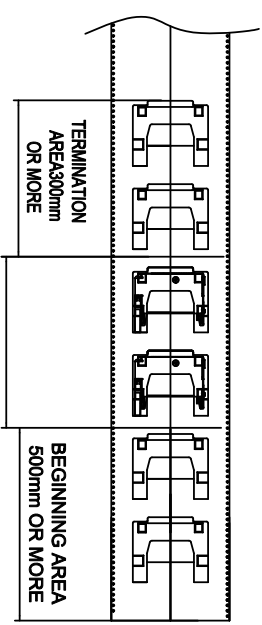

mat'l. code	ecn no.	dr	date	tolerances unless otherwise specified	CUSTOMER COPY	title	code
A	T06-0258	A.C.	11/21/05	X ± 0.30		CF ASS'Y, ABOVE MOUNT, LEFT PUSH, S/O=0	
B	T06-0036	A.C.	3/02/06	.XX ± 0.20			
C	T06-1173	S.LIN	10/12/08	.XXX ± 0.10			
				0' ± 2"			
		dr	ALLEN CHANG 11/03/05		projection		
		chr	STERLING LIN 11/03/05		MM		
		engr	ALLEN CHANG 11/03/05		scale	A4	
		appr	H.C. LIU 11/03/05			product family	CF
sheet	revision	sheet	1	2	3	size	dwg no
index	sheet	sheet	1	2	3		10061861
						code	TWN
							sheet
							4 of 4

ACAD

3 |

code code

4