



FCI CONFIDENTIAL

FCI

FCIconnect.com

FCI

| PRODUCT NO. | PRODUCT NO. STAND OFF | SOLDER TAIL | DIM "P" (mm) | DIM "Q" (mm) | FOR LOWER DECK OR UPPER DECK | D HOLD DOWN | INDICATOR FOR SOLDER TAIL ALIGNMENT | SHEET NO. | MOUNTING STYLE TO PCB |
|-------------|-----------------------|-------------|--------------|--------------|------------------------------|-------------|-------------------------------------|-----------|-----------------------|
| 92140       | 92140-XXXX            | 0           | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 000         | 0                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 000M        | 0                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 000MF       | 0                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 000H        | 0                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 000HLF      | 0                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 001         | 0                     | SMT STG     | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 001H        | 0                     | SMT STG     | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 001HLF      | 0                     | SMT STG     | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 002         | 0                     | SMT IL      | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 002F        | 0                     | SMT IL      | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 002H        | 0                     | SMT IL      | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 002HLF      | 0                     | SMT IL      | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 010         | 4                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 010M        | 4                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 010HLF      | 4                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 020         | 5                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 020M        | 5                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 020HLF      | 5                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 020H        | 5                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 020HLF      | 5                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 040         | 2                     | R/A         | 2.5          | ---          | ---                          | ---         | ---                                 |           |                       |
| 040M        | 2                     | R/A         | 2.5          | ---          | ---                          | ---         | ---                                 |           |                       |
| 040HLF      | 2                     | R/A         | 2.5          | ---          | ---                          | ---         | ---                                 |           |                       |
| 050         | 3                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 050M        | 3                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 050HLF      | 3                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 050H        | 3                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 050HLF      | 3                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 055         | FDR 0                 | R/A         | 8.6          | ---          | UPPER                        | ---         | ---                                 |           |                       |
| 055M        | FDR 0                 | R/A         | 8.6          | ---          | UPPER                        | ---         | ---                                 |           |                       |
| 055HLF      | FDR 0                 | R/A         | 8.6          | ---          | UPPER                        | ---         | ---                                 |           |                       |
| 045         | FDR 2                 | R/A         | 10.3         | ---          | UPPER                        | ---         | ---                                 |           |                       |
| 045M        | FDR 2                 | R/A         | 10.3         | ---          | UPPER                        | ---         | ---                                 |           |                       |
| 045HLF      | FDR 2                 | R/A         | 10.3         | ---          | UPPER                        | ---         | ---                                 |           |                       |
| 500         | 0                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 500M        | 0                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 500HLF      | 0                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 501         | 0                     | SMT STG     | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 501H        | 0                     | SMT STG     | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 501HLF      | 0                     | SMT STG     | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 502         | 0                     | SMT IL      | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 502F        | 0                     | SMT IL      | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 502H        | 0                     | SMT IL      | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 502HLF      | 0                     | SMT IL      | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 503         | 0                     | SMT IL      | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 503F        | 0                     | SMT IL      | ---          | ---          | ---                          | ---         | ---                                 |           |                       |
| 510         | 4                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 510M        | 4                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 510HLF      | 4                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 520         | 5                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 520M        | 5                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 520HLF      | 5                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 520H        | 5                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 520HLF      | 5                     | R/A         | 2.8          | ---          | ---                          | ---         | ---                                 |           |                       |
| 530         | 2                     | R/A         | 1.48         | ---          | ---                          | ---         | ---                                 |           |                       |
| 530M        | 2                     | R/A         | 1.48         | ---          | ---                          | ---         | ---                                 |           |                       |
| 530HLF      | 2                     | R/A         | 1.48         | ---          | ---                          | ---         | ---                                 |           |                       |
| 540         | 2                     | R/A         | 2.5          | ---          | ---                          | ---         | ---                                 |           |                       |
| 540M        | 2                     | R/A         | 2.5          | ---          | ---                          | ---         | ---                                 |           |                       |
| 540HLF      | 2                     | R/A         | 2.5          | ---          | ---                          | ---         | ---                                 |           |                       |
| 505         | FDR 0                 | R/A         | 8.6          | ---          | UPPER                        | ---         | ---                                 |           |                       |
| 505M        | FDR 0                 | R/A         | 8.6          | ---          | UPPER                        | ---         | ---                                 |           |                       |
| 535         | FDR 2                 | R/A         | 1.48         | 9.28         | UPPER                        | ---         | ---                                 |           |                       |
| 535M        | FDR 2                 | R/A         | 1.48         | 9.28         | UPPER                        | ---         | ---                                 |           |                       |
| 545         | FDR 2                 | R/A         | 2.5          | 10.3         | UPPER                        | ---         | ---                                 |           |                       |
| 545M        | FDR 2                 | R/A         | 2.5          | 10.3         | UPPER                        | ---         | ---                                 |           |                       |

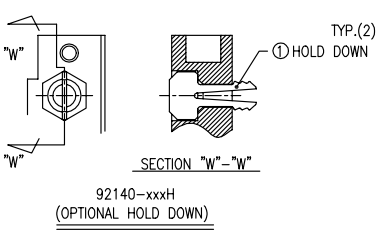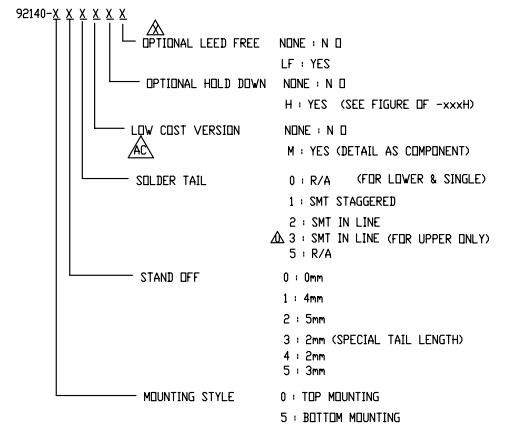



NOTE  
1. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

|                          |                                       |           |            |   |
|--------------------------|---------------------------------------|-----------|------------|---|
| mat'l code               | surface                               | tolerance | projection | product family                                  |
|                          | ISO 1302                              | ISO 406   | ISO 1101   | PCMCIA  |
| tr ecn no dr date        | tolerances unless otherwise specified | angles    | linear     | title   |
| AD N06-0288 M.Z 11/22/06 |                                       | ±2°       | MM         | 68 POS EJECTOR HEADER ASSY FOR 5.0V APPLICATION |
| AE N07-0026 D.T 1/29/07  |                                       |           | scale      | dwg no 92140 sheet 1 of 7 size A4               |
| AF N07-0114 C.M 06/14/07 |                                       |           |            | type CUSTOMER Drawing                           |
| AG N07-0209 M.Z 11/14/06 | dir Mike Zhou                         | 11/21/06  |            |   |
| AH N08-0219 M.Z 11/14/06 | engr Mike Zhou                        | 11/21/06  |            |   |
| AJ N09-0045 SH 05/28/09  | chr David Qin                         | 11/21/06  |            |   |
|                          | app Jack Wang                         | 11/21/06  |            |   |
| sheet revision           | AJ                                    | AJ        | AJ         | AJ  |
| index sheet              | 1                                     | 2         | 3          | 4   |

PDM: Rev:AJ STATUS Released Printed: Oct 12, 2010

FCI CONFIDENTIAL  
 FCI  
 FCIconnect.com  
 This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI.  
 Copyright © FCI

|              |
|--------------|
| PRODUCT NO.  |
| 92140-000M   |
| 92140-000MLF |
| 92140-000H   |
| 92140-000HLF |
| 92140-001    |
| 92140-001LF  |
| 92140-001H   |
| 92140-001HLF |
| 92140-002    |
| 92140-002LF  |
| 92140-002H   |
| 92140-002HLF |

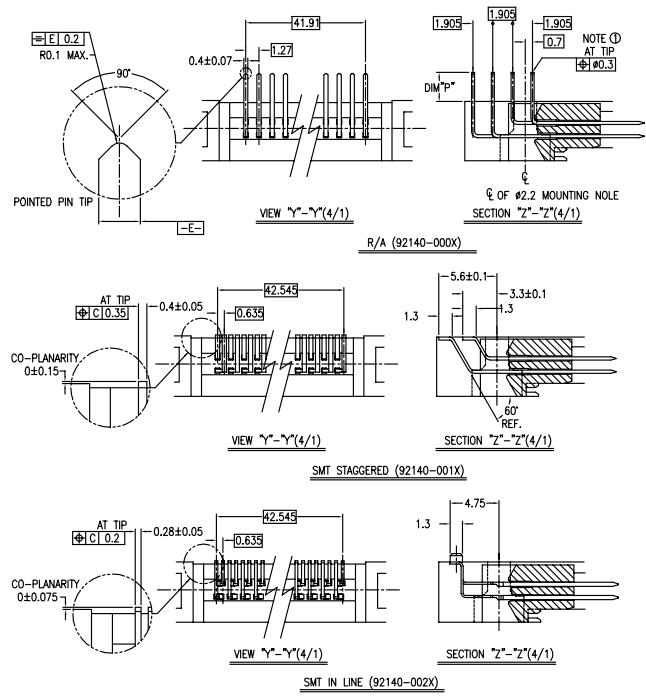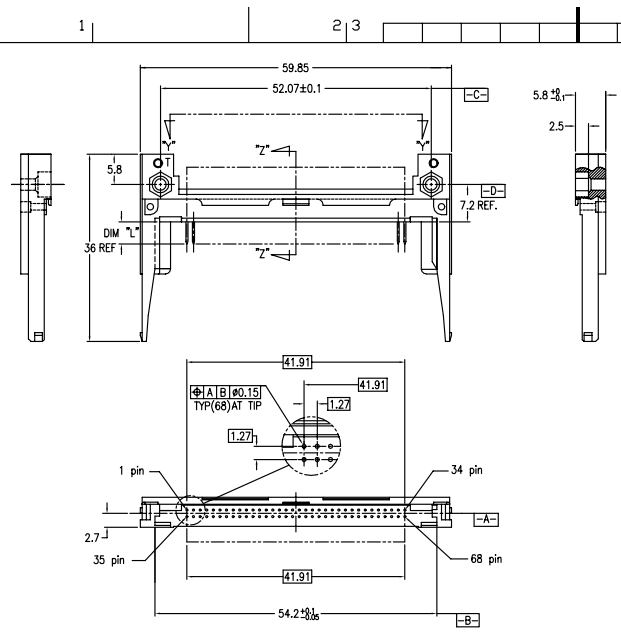

- NOTES
- TRUE POSITION IS A FREE GRID TO PIN PATTERN ITSELF.
  - SEE TA-946 FOR PCB LAYOUT.
  - MATERIAL: HOUSING : LCP UL94V-0 BLACK(SPECIAL VERSION MATERIAL: PA46). PIN : PHOSPHOR BRONZE(SPECIAL VERSION MATERIAL:BRASS). HOLD-DOWN : BRASS.
  - FINISH: PIN UNDER PLATING : 0.5µm MIN. Ni. CONTACT AREA : 0.1µm MIN. Au. OVER 0.5µm MIN. Pb-Ni. NOTE:SPECIAL VERSION-ONLY 0.25µm Au. SOLDER AREA : 2.5µm MIN. Sn-Pb. OR 2.5µm MIN. PURE Sn.(FOR -XXXLF) HOLD-DOWN : 2.5µm MIN. PURE Sn.
  - RECOMMENDED PCB HOLE (OPTIONAL HOLD-DOWN) : 2.3±0.1
  - SEQUENCE PIN ASSIGNMENT
- | DIM TYP  |         |         |
|----------|---------|---------|
| 4.25±0.1 | 3.5±0.1 | 5.0±0.1 |
| PIN No.  | OTHERS  | 36.67   |
7. GENERAL TOLERANCE : ±0.3  
8. SEE SHEET 1 REGARDING COMPONENTS.


|             |           |           |            |                            |
|-------------|-----------|-----------|------------|----------------------------|
| mat'l. code | surface   | tolerance | projection | product family             |
| l           | ISO 1302  | ISO 406   | ISO 1101   | PCMCIA                     |
| tr          | angles    | linear    | MM         | 68 PDS EJECTOR HEADER ASSY |
| dr          | ±2'       | ±0.3      | scale      | dwg no                     |
| eng         | Mike Zhou | 11/21/06  |            | 92140                      |
| chr         | David Qin | 11/21/06  |            | sheet 2 of 7               |
| app         | Jack Wang | 11/21/06  |            | size A4                    |
| sheet       | revision  |           |            | type CUSTOMER              |
| index       | sheet     |           |            | Drawing                    |

FCI CONFIDENTIAL

FCI



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright © FCI.

| PRODUCT NO.  | PRODUCT NO.  |
|--------------|--------------|
| 92140-010    | 92140-010LF  |
| 92140-010H   | 92140-010HLF |
| 92140-020    | 92140-020LF  |
| 92140-020H   | 92140-020HLF |
| 92140-040    | 92140-040LF  |
| 92140-050    | 92140-050LF  |
| 92140-050H   | 92140-050HLF |
| 92140-020MLF | 92140-040HLF |
| 92140-021MLF |              |

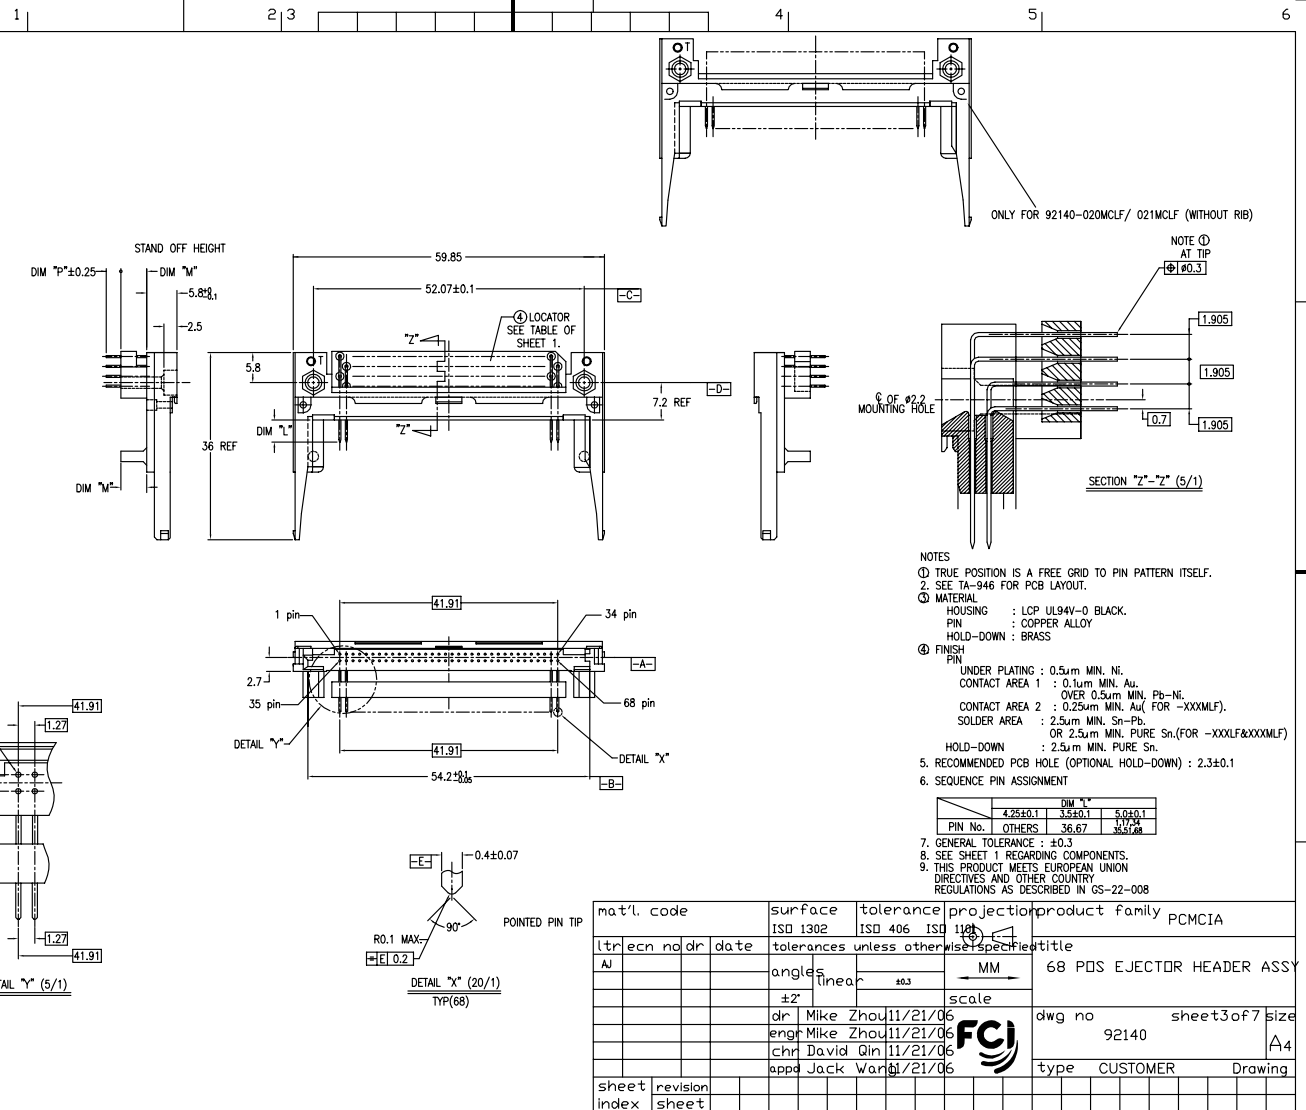

- NOTES
- TRUE POSITION IS A FREE GRID TO PIN PATTERN ITSELF.
  - SEE TA-946 FOR PCB LAYOUT.
  - MATERIAL: HOUSING : LCP UL94V-0 BLACK. PIN : COPPER ALLOY. HOLD-DOWN : BRASS.
  - FINISH: PIN UNDER PLATING : 0.5um MIN. Ni. CONTACT AREA 1 : 0.1um MIN. Au. OVER 0.5um MIN. Pb-Ni. CONTACT AREA 2 : 0.25um MIN. Au (FOR -XXXMLF). SOLDER AREA : 2.5um MIN. Sn-Pb. OR 2.5um MIN. PURE Sn (FOR -XXXLF&XXXMLF). HOLD-DOWN : 2.5um MIN. PURE Sn.
  - RECOMMENDED PCB HOLE (OPTIONAL HOLD-DOWN) : 2.3±0.1
  - SEQUENCE PIN ASSIGNMENT

|         | DIM "L"  |         |
|---------|----------|---------|
|         | 4.25±0.1 | 5.0±0.1 |
| PIN No. | OTHERS   | 36-67   |
|         |          | 33-67   |




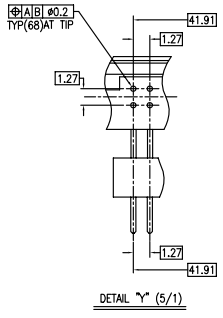



| mat'l. code        | surface                               | tolerance | projection | product family             |
|--------------------|---------------------------------------|-----------|------------|----------------------------|
|                    | ISO 1302                              | ISO 406   | ISO 1101   | PCMCIA                     |
| tr/econ no/dr date | tolerances unless otherwise specified |           |            |                            |
| AJ                 | angles                                | linear    | MM         | 68 PDS EJECTOR HEADER ASSY |
|                    | ±2'                                   | ±0.3      | scale      |                            |
|                    | dr Mike Zhou                          | 11/21/06  |            | dwg no 92140               |
|                    | eng Mike Zhou                         | 11/21/06  |            | sheet 3 of 7               |
|                    | chr David Qin                         | 11/21/06  |            | size A4                    |
|                    | app Jack Wang                         | 11/21/06  |            | type CUSTOMER Drawing      |
| sheet index        | revision sheet                        |           |            |                            |

PDM: Rev: AJ STATUS Released Printed: Oct 12, 2010 6

FCI CONFIDENTIAL  
 FCI  
 This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI.  
 Copyright FCI  
 FCIconnect.com

|             |
|-------------|
| PRODUCT NO. |
| 92140-005   |
| 92140-005LF |
| 92140-045   |
| 92140-045LF |

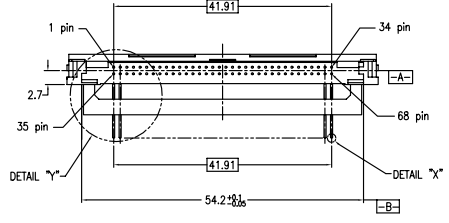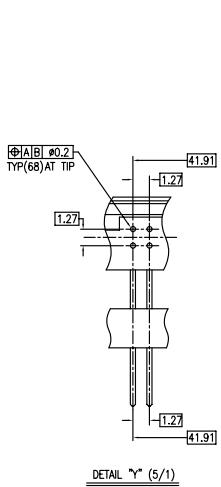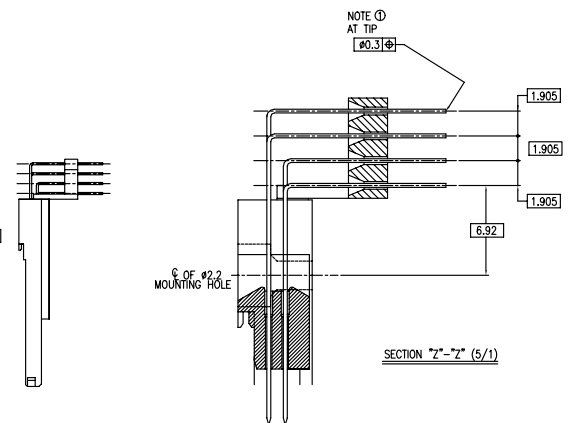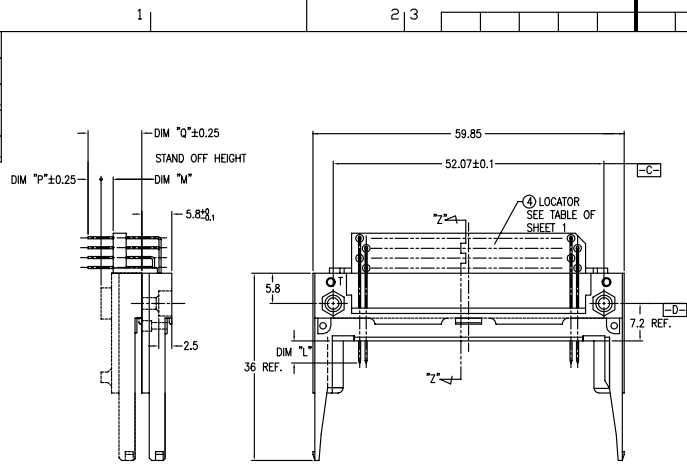

- NOTES
- TRUE POSITION IS A FREE GRID TO PIN PATTERN ITSELF.
  - SEE TA-346 FOR PCB LAYOUT.
  - MATERIAL  
 HOUSING : LCP UL94V-0 BLACK.  
 PIN : PHOSPHOR BRONZE.  
 HOLD-DOWN : BRASS
  - FINISH  
 PIN  
 UNDER PLATING : 0.5µm MIN. Ni.  
 CONTACT AREA : 0.1µm MIN. Au.  
 OVER 0.5µm MIN. Pb-Ni.  
 SOLDER AREA : 2.5µm MIN. Sn-Pb.  
 OR 2.5µm MIN. PURE Sn.(FOR -XXXLF)  
 HOLD-DOWN : 2.5µm MIN. PURE Sn.
  - RECOMMENDED PCB HOLE (OPTIONAL HOLD-DOWN) : 2.3±0.1
  - SEQUENCE PIN ASSIGNMENT
- | PIN No. | DIM "Y"  |         |         |
|---------|----------|---------|---------|
|         | 4.28±0.1 | 3.5±0.1 | 5.0±0.1 |
| OTHERS  | 36.67    | 17.74   | 33.78   |
- GENERAL TOLERANCE : ±0.3
  - SEE SHEET 1 REGARDING COMPONENTS.
  - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008





|                   |          |           |            |                |   |
|-------------------|----------|-----------|------------|----------------|---|
| mat'l. code       | surface  | tolerance | projection | product family | PCMCIA  |
| l/tecn no/dr date | ISO 1302 | ISO 406   | ISO 1101   | title          | 68 PDS EJECTOR HEADER ASSY FOR 5.0V APPLICATION |
| AJ                | angles   | linear    | ±0.3       | scale          | MM  |
|                   | dr       | Mike Zhou | 11/21/06   | dwg no         | 92140   |
|                   | eng      | Mike Zhou | 11/21/06   | sheet          | 4 of 7  |
|                   | chr      | David Qin | 11/21/06   | size           | A4  |
|                   | app      | Jack Wang | 11/21/06   | type           | CUSTOMER Drawing                                |

FCI CONFIDENTIAL

FCI

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright © FCI.

| PRODUCT NO.  |
|--------------|
| 92140-500    |
| 92140-500LF  |
| 92140-500H   |
| 92140-500HLF |
| 92140-501    |
| 92140-501LF  |
| 92140-501H   |
| 92140-501HLF |
| 92140-502    |
| 92140-502LF  |
| 92140-502H   |
| 92140-502HLF |
| 92140-503    |
| 92140-503LF  |

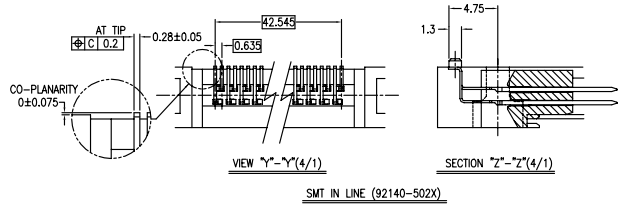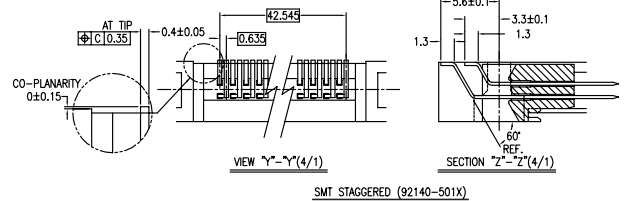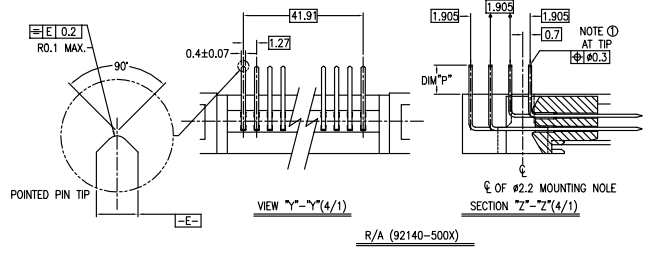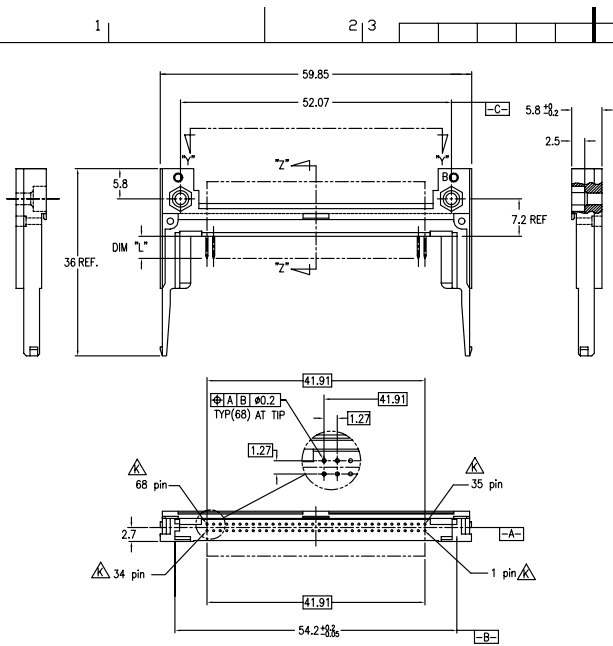

- NOTES
- TRUE POSITION IS A FREE GRID TO PIN PATTERN ITSELF.
  - SEE TA-946 FOR PCB LAYOUT.
  - MATERIAL: HOUSING : LCP UL94V-0 NATURAL; PIN : PHOSPHOR BRONZE; HOLD-DOWN : BRASS.
  - FINISH: UNDER PLATING : 0.5µm MIN. Ni; CONTACT AREA : 0.1µm MIN. Au; OVER 0.5µm MIN. Pb-Ni; SOLDER AREA : 2.5µm MIN. PURE Sn-Pb OR 2.5µm MIN. PURE Sn.(FOR -XXXLF); HOLD-DOWN : 2.5µm MIN. PURE Sn.
  - RECOMMENDED PCB HOLE (OPTIONAL HOLD-DOWN) : 2.3±0.1
  - SEQUENCE PIN ASSIGNMENT
- | DIM "A"  |          |
|----------|----------|
| PIN No.  | OTHERS   |
| 4.25±0.1 | 3.5±0.1  |
| 5.0±0.1  | 3.5±0.1  |
| 1.7±0.08 | 1.7±0.08 |
- GENERAL TOLERANCE : ±0.3
  - SEE SHEET 1 REGARDING COMPONENTS.
  - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008






|                   |                |           |            |   |
|-------------------|----------------|-----------|------------|---|
| mat'l. code       | surface        | tolerance | projection | product family                                  |
|                   | ISO 1302       | ISO 406   | ISO 1101   | PCMCIA  |
| tr/ecc no/dr date | angles         | linear    | MM         | 68 PDS EJECTOR HEADER ASSY FOR 5.0V APPLICATION |
| AJ                | ±2'            | ±0.3      | scale      |   |
|                   | dr Mike Zhou   | 11/21/06  |            | dwg no 92140 sheet 5 of 7 size A4               |
|                   | eng Mike Zhou  | 11/21/06  |            |   |
|                   | chr David Qin  | 11/21/06  |            |   |
|                   | app Jack Wang  | 11/21/06  |            | type CUSTOMER Drawing                           |
| sheet index       | revision sheet |           |            |   |

FCI CONFIDENTIAL

FCI

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright © FCI.

| PRODUCT NO.         |                       |                       |
|---------------------|-----------------------|-----------------------|
| 92140-510           | 92140-510LF $\Delta$  | 92140-510HLF $\Delta$ |
| 92140-520           | 92140-520LF $\Delta$  |                       |
| 92140-520H $\Delta$ | 92140-520HLF $\Delta$ |                       |
| 92140-530           | 92140-530LF $\Delta$  |                       |
| 92140-540           | 92140-540LF $\Delta$  |                       |

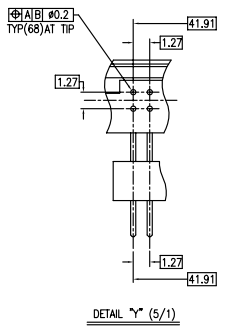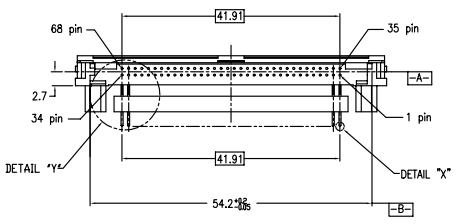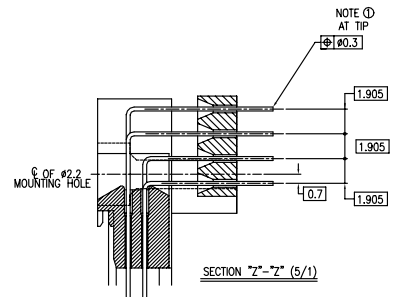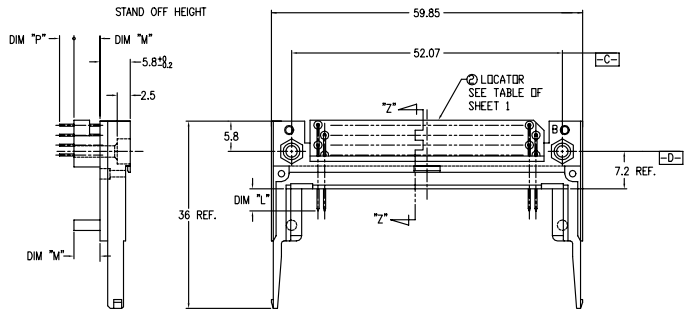

- NOTES
- TRUE POSITION IS A FREE GRID TO PIN PATTERN ITSELF.
  - SEE TA-946 FOR PCB LAYOUT.
  - MATERIAL: HOUSING : LCP UL94V-0 NATURAL. PIN : PHOSPHOR BRONZE. HOLD-DOWN : BRASS.
  - FINISH: UNDER PLATING : 0.5µm MIN. Ni. CONTACT AREA : 0.1µm MIN. Au. OVER : 0.5µm MIN. Ni-Pb-Ni. SOLDER AREA : 2.5µm MIN. PURE Sn-Pb. OR 2.5µm MIN. PURE Sn.(FOR -XXXLF) HOLD-DOWN : 2.5µm MIN. PURE Sn.
  - RECOMMENDED PCB HOLE (OPTIONAL HOLD-DOWN) : 2.3±0.1
  - SEQUENCE PIN ASSIGNMENT
- | PIN No. | DIM "M"  |         |         |
|---------|----------|---------|---------|
|         | 4.25±0.1 | 3.5±0.1 | 5.0±0.1 |
| OTHERS  | 36.67    | 35.5    | 35.5    |
- GENERAL TOLERANCE : ±0.3
  - SEE SHEET 1 REGARDING COMPONENTS.
  - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

|                    |                       |                        |                        |                        |   |
|--------------------|-----------------------|------------------------|------------------------|------------------------|---|
| mat'l. code        | surface               | tolerance              | projection             | product family         | PCMCIA  |
| ltr ecn no dr date | ISO 1302              | ISO 406                | ISO 1101               | title                  | 68 POS EJECTOR HEADER ASSY FOR 5.0V APPLICATION |
| AJ                 | angles                | linear                 | MM                     | dwg no                 | 92140   |
|                    | ±2'                   | ±0.3                   | scale                  | sheet                  | 6 of 7  |
|                    | dr Mike Zhou 11/21/06 | eng Mike Zhou 11/21/06 | chr David Qin 11/21/06 | app Jack Wang 11/21/06 | size A4   |
| sheet              | revision              |                        |                        | type                   | CUSTOMER Drawing                                |
| index              | sheet                 |                        |                        |                        |   |




PDM: Rev: AJ STATUS Released Printed: Oct 12, 2010 6

FCI CONFIDENTIAL

FCI

FCI

|             |
|-------------|
| PRODUCT NO. |
| 92140-505   |
| 92140-505LF |
| 92140-535   |
| 92140-535LF |
| 92140-545   |
| 92140-545LF |

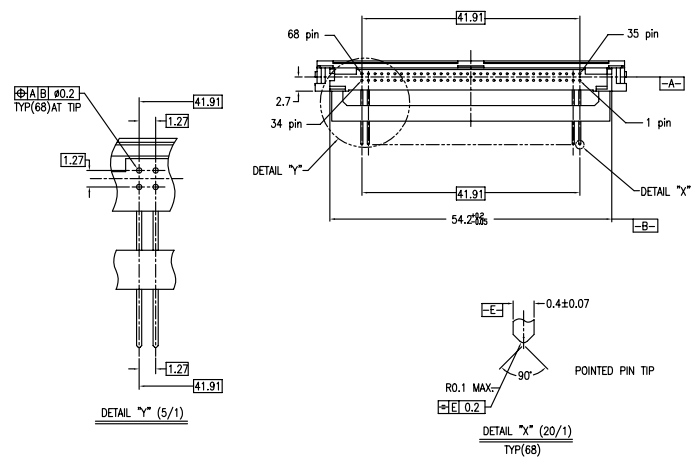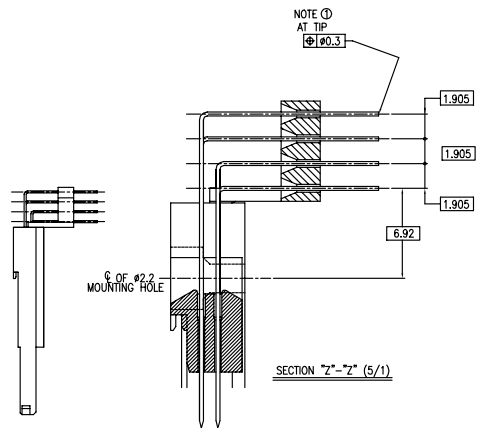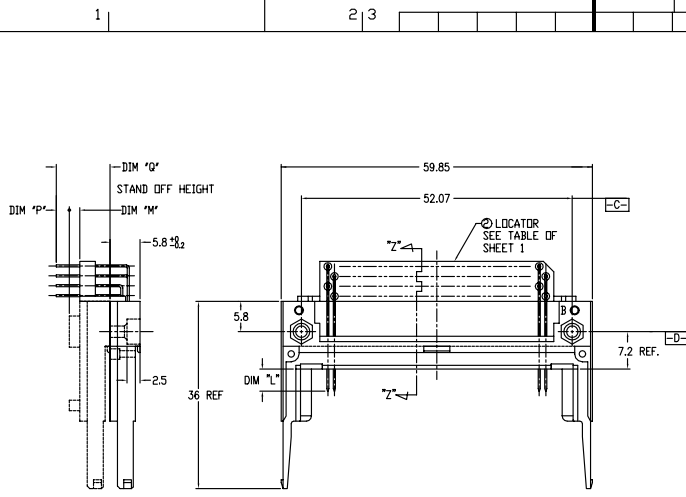

- NOTES
- TRUE POSITION IS A FREE GRID TO PIN PATTERN ITSELF.
  - SEE SHEET 1 REGARDING COMPONENTS.
  - MATERIAL : LCP UL94V-0 NATURAL  
PIN : PHOSPHOR BRONZE  
HOLD-DOWN : BRASS
  - FINISH : UNDER PLATING : 0.5µm MIN. Ni  
CONTACT AREA : 0.1µm MIN. Au  
OVER : 0.5µm MIN. Pb-Ni  
SOLDER AREA : 2.5µm MIN. Sn-Pb  
OR 2.5µm MIN. PURE Sn (FOR -XXXLF)  
HOLD-DOWN : 2.5µm MIN. PURE Sn.
  - RECOMMENDED PCB HOLE (OPTIONAL HOLD-DOWN) : 2.3±0.1
  - SEQUENCE PIN ASSIGNMENT

| PIN No. | DIM. (mm) |         |         |
|---------|-----------|---------|---------|
|         | 4.25±0.1  | 3.5±0.1 | 5.0±0.1 |
| OTHERS  | 36.67     | 36.17   | 36.17   |

- GENERAL TOLERANCE : ±0.3
- SEE SHEET 1 REGARDING COMPONENTS.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

|                    |                        |           |            |                |   |
|--------------------|------------------------|-----------|------------|----------------|---|
| mat'l. code        | surface                | tolerance | projection | product family | PCMCIA  |
| tr/ecln no/dr date | ISO 1302               | ISO 406   | ISO 1101   | title          | 68 PDS EJECTOR HEADER ASSY FOR 5.0V APPLICATION |
| AJ                 | angles                 | linear    | ±0.3       | MM             |   |
|                    | ±2'                    |           | scale      |                |   |
|                    | dr Mike Zhou 11/21/06  |           |            | dwg no         | 92140   |
|                    | eng Mike Zhou 11/21/06 |           |            | sheet of 7     | 7   |
|                    | chr David Qin 11/21/06 |           |            | size           | A4  |
|                    | app Jack Wang 11/21/06 |           |            | type           | CUSTOMER Drawing                                |
| sheet index        | revision               | sheet     |            |                |   |

**PDM: Rev: AJ**      STATUS: **Released**      Printed: Oct 12, 2010      6