

ET4-1-SM1

E-Series RF 4:1 Transformer
0.5 – 350 MHz

V1


Features

- 4:1 Impedance Ratio
- CT on Secondary
- Surface Mount
- Tape and reel packaging available

Description

M/A-COM's ET4-1-SM1 is a 4:1 RF transformer in a low cost, surface mount package. Ideally suited for high volume cellular and wireless applications. Typical applications include single to balanced mode conversion and impedance matching. Parts are packaged in tape & reel.

SM - 1 Package

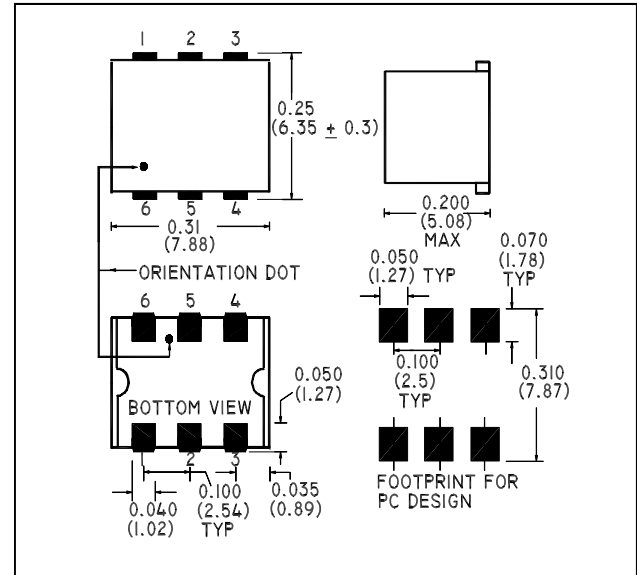

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$ ¹

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
RF Frequency	—	0.5 - 350	MHz	—	—	—
Insertion Loss	$F_L - f_U$	0.5 - 350	dB	—	—	3.0
		2.0 - 100	dB	—	—	1.0
Amplitude Imbalance	$F_L - f_U$	0.5 - 350	dB	—	—	1.0
		2.0 - 100	dB	—	—	0.1
Phase Imbalance	$F_L - f_U$	0.5 - 350	Degrees	—	—	5°
		2.0 - 100	Degrees	—	—	1°

Absolute Maximum Ratings¹

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

1. Operation of this device above any one of these parameters may cause permanent damage.

Ordering Information

Part Number	Package
ET4-1-SM1TR	Tape and Reel (900 piece Reel)

1

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

ET4-1-SM1

E-Series RF 4:1 Transformer
0.5 – 350 MHz

V1

Pin Configuration

Pin No.	Function
1	Secondary
2	Secondary CT
3	Secondary Dot
4	Primary Dot
5	Not Connected
6	Primary

Schematic

