



Electrical

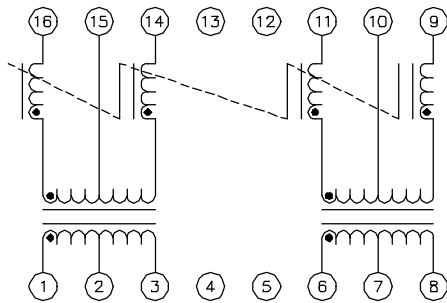


SCHMATIC

ELECTRICAL SPECIFICATIONS @ 25°C

TURNS RATIO (1-2-3 TO 16-15-14) TURNS RATIO (6-7-8 TO 11-10-9) PHASING OCL (1-3) OCL (6-8) OCL (COMMON MODE INDUCTOR) (15 TO 14 AND 16 SHORTED) LL (1-3, SHORT 16-14) LL (6-8 SHORT 11-9) C _{ww} (1-3 TO 14-16) C _{ww} (6-8 TO 11-9) DCR (1-3, 14-16, 6-8 AND 9-11) HIPOT (1-3 TO 14-16 AND 9-11 TO 6-8) Z _p (COMMON MODE INDUCTOR) (14 AND 16 SHORTED) TO 15, OR (9 AND 11 SHORTED) TO 10	: 1CT : 1CT ± 5% : 1CT : 2CT ± 5% : 1, 16 AND 11, 6 IN-PHASE : 120μH MIN @ 10mV, 10KHz : 20μH MIN @ 10 mV, 10KHz : 18-45μH @ .008VRMS MAX, 100KHz : .40μH MAX @ 1MHZ MIN, 1V : .2μH MAX @ 1MHZ MIN, 1V : 9pF MAX, 100KHz, 1V : 7pF MAX, 100KHz, 1V : 0.9Ω MAX : 1500VRMS, 1MIN : PER GRAPH
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

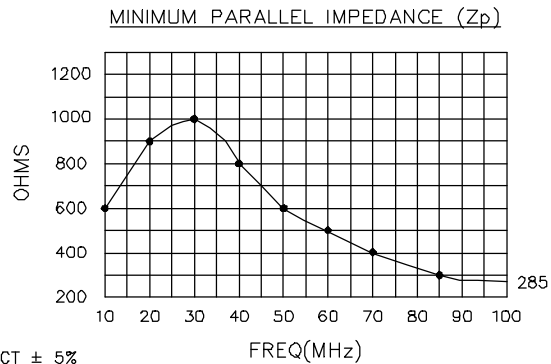

Mechanical

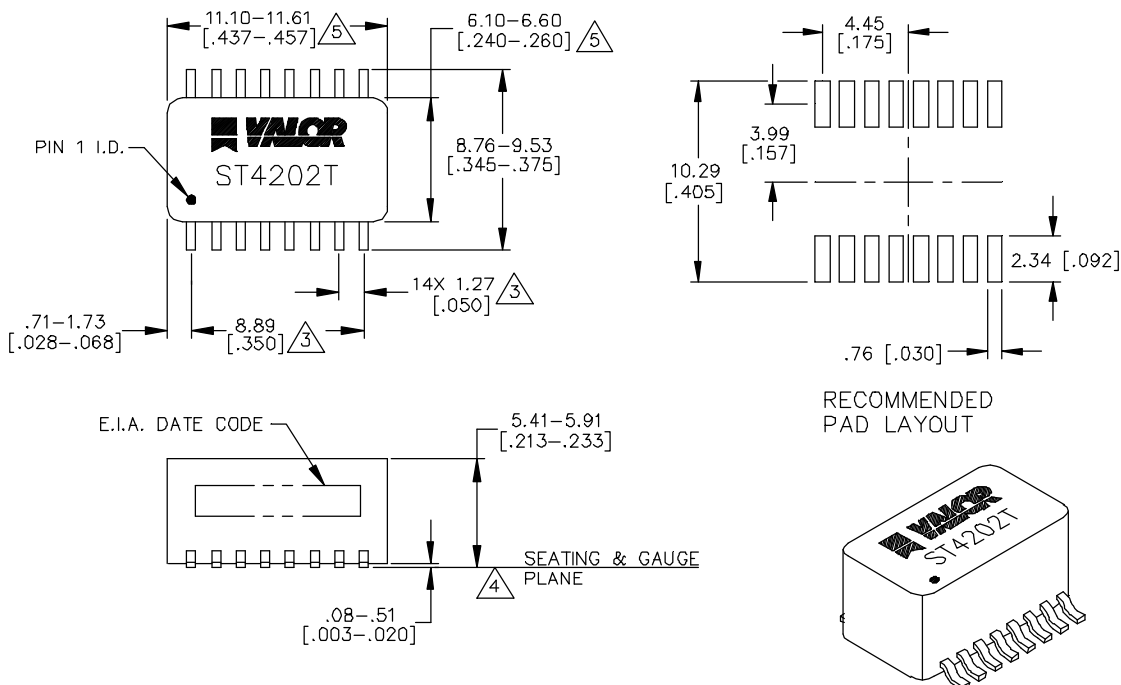

WEBSITE www.valorinc.com E-MAIL marketing@valorinc.com

NORTH AMERICA
tel 1-800-31 VALOR
fax 619-537-2525

ASIA/PACIFIC
tel +852-2953-1000
fax +852-2953-1333

EUROPE
tel +44-1727-824 875
fax +44-1727-824 898