


# MILITARY/AEROSPACE PRODUCTS

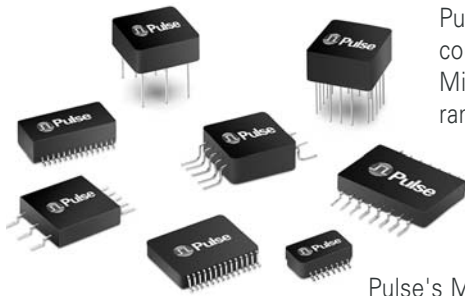


Pulse is one of the leading manufacturers of magnetic interface transformers, data bus couplers, delay lines, ethernet transformers, and custom electronic components for Military/Aerospace applications. Both catalog and custom designs include a comprehensive range of high-performance solutions and packaging for QPL and non-QPL MIL-STD-1553 interface transformers, various MIL-STD-1553 Data Bus Couplers and QPL and non-QPL active and passive delay lines. In addition, Copperhead transformers and transceivers support a variety of high-speed applications that includes Fibre Channel, Gigabit Ethernet, SONET, HDTV, IEEE1394B, SMTPE, Ethernet and AFDX buses.

Pulse's Military/Aerospace products are designed to meet the most demanding requirements for military, aerospace and industrial applications. For catalog and/or custom designed products, contact Pulse's Military/Aerospace Division at 215-781-6400 or find an authorized distributor or representative on the Pulse website (see back cover).

## HIGH SPEED DATA BUS

### Copperhead™ Series Transceiver Line Interface Modules

#### Ordering Information <sup>1</sup>

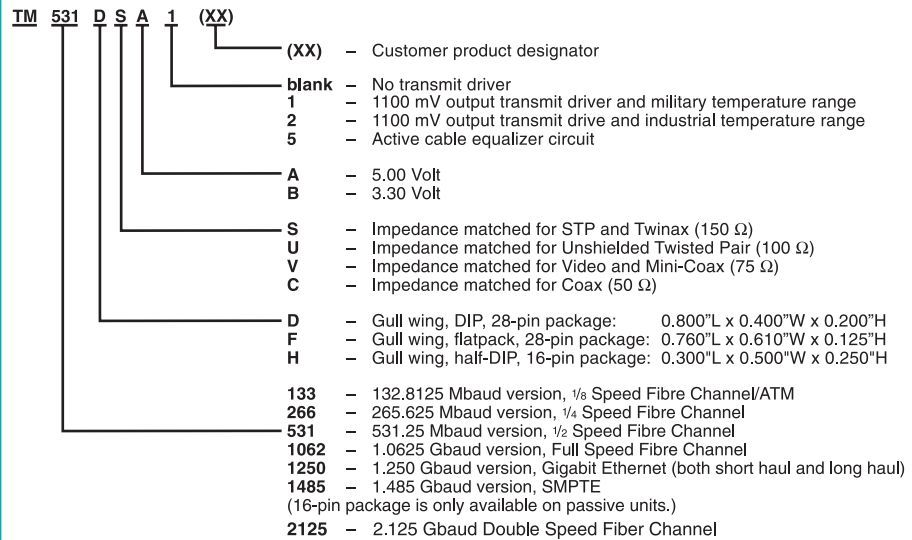

#### High Speed Data and Communications over 100+ Meters of Copper

- Withstands infrared and vapor phase soldering
- Military temperature range -55°C to +125°C
- Low transmit/receive jitter
- Low power dissipation; 450 mW typical
- ECL logic interface
- Surface mount – pick-and-place compatible

**Applications:** Fibre Channel, Gigabit Ethernet, SONET, HDTV, IEEE 1394B, SMTPE

1. See data sheet "Copperhead™ Series Fibre Channel Transceiver Line Interface Module" (fibre.pdf) on the data sheet menu at [www.pulseeng.com](http://www.pulseeng.com).

#### Copperhead™ Series <sup>1,2</sup>

Part Number	Turns Ratio (±5%)	Primary Inductance (µH MIN)	Rise Time (ps MAX @ 20-80%)	DC Resistance (Ω MAX)	Hipot (Vrms MIN)	Insertion Loss (dB MAX)	Application Nominal Bit Rate (Mbaud)
T-330SCT	1CT:1CT	26.0 (@ 1.0 Vrms, 100 kHz)	350	0.2	1500	-1.5 (15-165 MHz)	265.625 (quarter speed)
T-1062SCT	1CT:1CT	3.75 (@ 1.0 Vrms, 100 kHz)	280	0.2	1500	-2.0 (100-625 MHz)	1062.50 (full speed)
T-1250SCT	1CT:1CT	3.75	280	0.2	1500	-2.0	1250
T-1485SCT	1CT:1CT	3.75	280	0.2	1500	-2.0	1485 (SMTPE)
T-3200SCT	1:1	0.70	200	0.2	1500	-4.50	3200

1. **Web:** <http://www.pulseeng.com> home page, click on "DATA SHEETS." Then select Military Aerospace, "CopperHead™ High Speed Dual Transformers" (M105.pdf).

2. **Dual Transformers** designed specifically for Point-to-Point Coupling to 150 Ω Twinax Cable: **Withstands** infrared and vapor phase soldering; **Military Temp Range** = -55°C to +125°C; **Weight** = 1.0 grams; **Surface Mount** = pick-and-place compatible. **Applications:** Fibre Channel, Gigabit Ethernet, SONET, HDTV, IEEE 1394B, SMTPE.

**Application Notes:** These isolation transformers protect the station from static charges that may develop on the cable and prevent ground loop currents from being transferred between stations. They have also been designed to provide common mode rejection within the transmission band, reducing EMI.

# MILITARY/AEROSPACE PRODUCTS



## MILITARY/AEROSPACE ETHERNET/AFDX

10/100								
Number of Ports	Part Number	Turns Ratio	Configuration <sup>2</sup>		Style	Package	Size L/W/H (in.)	Data Sheet <sup>1</sup>
			RX	TX				
Single	100B-1001	1CT:1CT	T, C, S	T,C	12-pin SMT	.630 / .470 / .185	M101	
	100B-1001X	1CT:1CT	T, C, S	T,C	12-pin SMT	.630 / .470 / .185	M101	
	100B-1003	1CT:1CT	T,C	T,C	16-pin SOIC	.500 / .265 / .235	M101	
	100B-1003X	1CT:1CT	T,C	T,C	16-pin SOIC	.500 / .265 / .235	M101	
Dual	100B-2002	1CT:1CT	T, C	T,C	24-pin SMT	.518 / .595 / .241	M110	
	100B-2002X	1CT:1CT	T, C	T,C	24-pin SMT	.518 / .595 / .241	M110	
Quad	100B-4005	1CT:1CT	T,C	T,C	40-pin SOIC	1.120 / .480 / .280	M102	
	100B-4005X	1CT:1CT	T,C	T,C	40-pin SOIC	1.120 / .480 / .280	M102	

1. "10/100Base-TX Single-Port Transformer Modules - Military/Aerospace Grade" (M101.pdf) or "10/100Base-TX Quad-Port Transformer Modules - Military/Aerospace Grade" (M102.pdf) at [www.pulseeng.com](http://www.pulseeng.com).

2. T = Transformer, C = Choke, S = Shunt inductor, SMT = 50 mil pitch leads, SOIC = 100 mil pitch leads

Gigabit								
Number of Ports	Part Number	Turns Ratio	Configuration <sup>2</sup>		Style	Package*	Size L/W/H (in.)	Data Sheet <sup>1</sup>
			RX	TX				
Single	1000B-5001	1CT:1CT	T, C, S	T, C, S	24-pin SOIC	.695 / .635 / .230	M106	
	1000B-5001X	1CT:1CT	T, C, S	T, C, S	24-pin SOIC	.695 / .635 / .230	M106	
	1000B-5002	1CT:1CT	T, C, S	T, C, S	24-pin SOIC	.695 / .635 / .230	M106	
	1000B-5002X	1CT:1CT	T, C, S	T, C, S	24-pin SOIC	.695 / .635 / .230	M106	
Dual	1000B-5003	1CT:1CT	T, C	T, C	50-pin SOIC <sup>3</sup>	1.095 / .430 / .340	M106	
	1000B-5003X	1CT:1CT	T, C	T, C	50-pin SOIC <sup>3</sup>	1.095 / .430 / .340	M106	

1. Web: [www.pulseeng.com](http://www.pulseeng.com) home page, pick data sheets "10/100/1000Base-T Single Port Transformer Modules-Military/ space Grade" (M106.pdf).

2. T = Transformer, C = Choke, S = Shunt inductor, SMT = 50 mil pitch leads, SOIC = 100 mil pitch leads

3. 0.99mm (.039") pitch leads

## MIL-STD-1553

### Non-QPL, Low Profile and Stacked<sup>1</sup>

Part <sup>2</sup> Number	Turns Ratio (±3%)	Impedance (Ω MIN)	Package* L/W/H (in.)	Data Sheet	Part <sup>2</sup> Number	Turns Ratio (±3%)	Impedance (Ω MIN)	Package* L/W/H (in.)	Data Sheet
FL1553-1	1CT:1CT/1CT:707CT	4,000	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	DTL1553-45	1CT:2.5CT/1CT:1.79CT	4,000	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>
GL1553-1	1CT:1CT/1CT:707CT	4,000	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	STQ1553-1	1CT:1CT/1CT:707CT	4,000	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
TL1553-1	1CT:1CT/1CT:707CT	4,000	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	SFQ1553-2	1.4CT:1CT/2CT:1CT	7,200	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
FL1553-2	1.4CT:1CT/2CT:1CT	7,200	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	STQ1553-3	1.25CT:1CT/1.66CT:1CT	4,000	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
GL1553-2	1.4CT:1CT/2CT:1CT	7,200	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	STQ1553-5	1CT:2.12CT/1CT:1.5CT	4,000	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
TL1553-2	1.4CT:1CT/2CT:1CT	7,200	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	STQ1553-45	1CT:2.5CT/1CT:1.79CT	4,000	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
FL1553-3	1.25CT:1CT/1.66CT:1CT	4,000	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	SFQ1553-1	1CT:1CT/1CT:707CT	4,000	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
GL1553-3	1.25CT:1CT/1.66CT:1CT	4,000	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	SGQ1553-1	1CT:1CT/1CT:707CT	4,000	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
TL1553-3	1.25CT:1CT/1.66CT:1CT	4,000	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	SFQ1553-2	1.4CT:1CT/2CT:1CT	7,200	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
FL1553-5	1CT:2.12CT/1CT:1.5CT	4,000	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	SGQ1553-2	1.4CT:1CT/2CT:1CT	7,200	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
GL1553-5	1CT:2.12CT/1CT:1.5CT	4,000	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	SFQ1553-3	1.25CT:1CT/1.66CT:1CT	4,000	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
TL1553-5	1CT:2.12CT/1CT:1.5CT	4,000	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	SGQ1553-3	1.25CT:1CT/1.66CT:1CT	4,000	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
FL1553-45	1CT:2.5CT/1CT:1.79CT	4,000	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	SFQ1553-5	1CT:2.12CT/1CT:1.5CT	4,000	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
GL1553-45	1CT:2.5CT/1CT:1.79CT	4,000	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	SGQ1553-5	1CT:2.12CT/1CT:1.5CT	4,000	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
TL1553-45	1CT:2.5CT/1CT:1.79CT	4,000	.630 / .630 / .155	NQPLC2 <sup>2,3</sup>	SFQ1553-45	1CT:2.5CT/1CT:1.79CT	4,000	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
DFL1553-1	1CT:1CT/1CT:707CT	4,000	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>	SGQ1553-45	1CT:2.5CT/1CT:1.79CT	4,000	.630 / .630 / .340	NQPLC2 <sup>2,3</sup>
DGL1553-1	1CT:1CT/1CT:707CT	4,000	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>	SLQ1553-1	1CT:1CT/1.4CT:1CT	4,000	.630 / .630 / .280	M104 <sup>2</sup>
DTL1553-1	1CT:1CT/1CT:707CT	4,000	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>	SLQ1553-2	1.4CT:1CT/2CT:1CT	7,200	.630 / .630 / .280	M104 <sup>2</sup>
DFL1553-2	1.4CT:1CT/2CT:1CT	7,200	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>	SLQ1553-3	1.25CT:1CT/1.66CT:1CT	4,000	.630 / .630 / .280	M104 <sup>2</sup>
DGL1553-2	1.4CT:1CT/2CT:1CT	7,200	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>	SLQ1553-5	1CT:2.12CT/1CT:1.5CT	4,000	.630 / .630 / .280	M104 <sup>2</sup>
DTL1553-2	1.4CT:1CT/2CT:1CT	7,200	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>	SLQ1553-45	1CT:2.5CT/1CT:1.79CT	4,000	.630 / .630 / .280	M104 <sup>2</sup>
DFL1553-3	1.25CT:1CT/1.66CT:1CT	4,000	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>	SLOT1553-1	1CT:1CT/1.4CT:1CT	4,000	.630 / .630 / .280	M104 <sup>2</sup>
DGL1553-3	1.25CT:1CT/1.66CT:1CT	4,000	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>	SLOT1553-2	1.4CT:1CT/2CT:1CT	7,200	.630 / .630 / .280	M104 <sup>2</sup>
DTL1553-3	1.25CT:1CT/1.66CT:1CT	4,000	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>	SLOT1553-3	1.25CT:1CT/1.66CT:1CT	4,000	.630 / .630 / .280	M104 <sup>2</sup>
DFL1553-5	1CT:2.12CT/1CT:1.5CT	4,000	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>					
DGL1553-5	1CT:2.12CT/1CT:1.5CT	4,000	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>					
DTL1553-5	1CT:2.12CT/1CT:1.5CT	4,000	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>					
DFL1553-45	1CT:2.5CT/1CT:1.79CT	4,000	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>					
DGL1553-45	1CT:2.5CT/1CT:1.79CT	4,000	.930 / .630 / .155	NQPLC2 <sup>2,3</sup>					

1. Designed and built to conform to MIL-PRF-21038/27

2. Web <http://www.pulseeng.com> home page, click data sheets "non-QPL MIL-STD-1553 Interfac Transformers" (N\_QPL\_Cat2\_links.pdf) and "MIL-STD-1553 Interface Transformers Low Profile / Stacked / Dual Ratio" (M104.pdf).

3. Prefix / Operating Temperature : xxxC1553-xx / 0°C to +70°C ; xxxN1553-xx / -40°C to +85°C ; xxx1553-xx / -55°C to +125°C

continued →

\*Mounting: FP = Flat Pack TH = Through Hole SM = Surface Mount

# MILITARY/AEROSPACE PRODUCTS



## MIL-STD-1553 (continued)

### Non-QPL, Low Profile and Stacked (continued)<sup>1</sup>

Part <sup>2</sup> Number	Turns Ratio (±3%)	Impedance (Ω MIN)	Package* L/W/H (in.)	Data Sheet
SLOT1553-5	1CT:2.12CT/1CT:1.5CT	4,000	.630 / .630 / .280	M104 <sup>2</sup>
SLOT1553-45	1CT:2.5CT/1CT:1.79CT	4,000	.630 / .630 / .280	M104 <sup>2</sup>
SLOF1553-1	1CT:1CT/1.4CT:1CT	4,000	.630 / .630 / .280	M104 <sup>2</sup>
SLOF1553-2	1.4CT:1CT/2CT:1CT	7,200	.630 / .630 / .280	M104 <sup>2</sup>
SLOF1553-3	1.25CT:1CT/1.66CT:1CT	4,000	.630 / .630 / .280	M104 <sup>2</sup>
SLOF1553-5	1CT:2.12CT/1CT:1.5CT	4,000	.630 / .630 / .280	M104 <sup>2</sup>
SLOF1553-45	1CT:2.5CT/1CT:1.79CT	4,000	.630 / .630 / .280	M104 <sup>2</sup>

1. **Designed** and built to conform to MIL-PRF-21038/27
2. **Web:** [www.pulseeng.com](http://www.pulseeng.com) home page, pick data sheets "Non-QPL MIL-STD-1553 Interface Transformers" (N\_QPL\_Cat2\_links.pdf) or "MIL-STD-1553 Interface Transformers - Low profile/Stacked/Dual Ratio" (M104.pdf).

### Interface Transformers — COTS Series<sup>1</sup>

Part <sup>2</sup> Number	Turns Ratio (±3%)	Impedance (Ω MIN)	Package* (L/W/H) in.	Data <sup>3</sup> Sheet
x1553-1	1CT:1CT/1CT:707CT	4,000	.625 / .625 / .250	NQPLC2
x1553-2	1.4CT:1CT/2CT:1CT	7,200	.625 / .625 / .250	NQPLC2
x1553-3	1.25CT:1CT/1.66CT:1CT	4,000	.625 / .625 / .250	NQPLC2
x1553-5	1CT:2.12CT/1.5CT:1CT	4,000	.625 / .625 / .250	NQPLC2
x1553-45	1CT:2.5CT/1CT:1.79CT	4,000	.625 / .625 / .250	NQPLC2

1. **Designed** and built to conform to MIL-PRF-21038/27
2. **Prefix / Operating Temperature:** **C** / 0°C to +70°C; **N** / -40°C to +85°C; **TQ** / -55°C to +125°C
3. **Web:** [www.pulseeng.com](http://www.pulseeng.com) home page, pick data sheets "Non-QPL MIL-STD-1553 Interface Transformers" (N\_QPL\_Cat2\_links.pdf).

### Interface Transformers — Low Profile Miniature Series

Part Number	Turns Ratio (±3%)	Impedance (Ω MIN)	Package* (L/W/H) in.	Data Sheet
SMG1553-60	1.25CT:1CT	4,000	.400 / .400 / .185	M112
SMG1553-61	1.66CT:1CT	4,000	.400 / .400 / .185	M112
SMG1553-62	1.41CT:1CT	7,200	.400 / .400 / .185	M112
SMG1553-63	2CT:1CT	7,200	.400 / .400 / .185	M112
SMG1553-65	1CT:1.79CT	4,000	.400 / .400 / .185	M112
SMG1553-66	1CT:2.7CT	4,000	.400 / .400 / .185	M112

\*Mounting: **FP** = Flat Pack **TH** = Through Hole **SM** = Surface Mount

### QPL Series — Qualified to MIL-PRF-21038/27

Part <sup>1</sup> Number	Military Designation Number	Turns Ratio (±3%)	Impedance (Ω MIN)	Package* L/W/H (in.)	Data <sup>2</sup> Sheet
Q1553-20	M21038/27-05	1:1.41	3,000	.500 / .350 / .250	QPL6
Q1553-21	M21038/27-06	1CT:1CT	3,000	.500 / .350 / .250	QPL6
Q1553-22	M21038/27-07	1CT:1.41CT	3,000	.500 / .350 / .250	QPL6
Q1553-23	M21038/27-08	1CT:1.66CT	3,000	.500 / .350 / .250	QPL6
Q1553-24	M21038/27-09	1CT:2CT	3,000	.500 / .350 / .250	QPL6
Q1553-25	M21038/27-28	1CT:1.5CT	3,000	.500 / .350 / .250	QPL6
Q1553-51	M21038/27-29	1CT:1.79CT	3,000	.500 / .350 / .250	QPL6
Q1553-52	M21038/27-30	1CT:2.5CT	3,000	.500 / .350 / .250	QPL6
Q1553-1	M21038/27-01	1CT:1CT/1CT:707CT	4,000	.625 / .625 / .250	QPL6
Q1553-2	M21038/27-02	1.4CT:1CT/2CT:1CT	7,200	.625 / .625 / .250	QPL6
Q1553-3	M21038/27-03	1.25CT:1CT/1.66CT:1CT	4,000	.625 / .625 / .250	QPL6
Q1553-5	M21038/27-10	1CT:2.12CT/1CT:1.5CT	4,000	.625 / .625 / .250	QPL6
Q1553-45	M21038/27-26	1CT:2.5CT/1CT:1.79CT	4,000	.625 / .625 / .275	QPL6
Q1553-81	M21038/27-21	1CT:1CT/1CT:707CT	4,000	.625 / .625 / .275	QPL6
Q1553-82	M21038/27-22	1.4CT:1CT/2CT:1CT	7,200	.625 / .625 / .275	QPL6
Q1553-83	M21038/27-23	1.25CT:1CT/1.66CT:1CT	4,000	.625 / .625 / .275	QPL6
Q1553-84	M21038/27-24	1CT:2.12CT/1CT:1.5CT	4,000	.625 / .625 / .275	QPL6
Q1553-85	M21038/27-25	1CT:2.5CT/1CT:1.79CT	4,000	.625 / .625 / .275	QPL6
FPQ1553-6	M21038/27-16	1CT:1CT/1CT:707CT	4,000	.625 / .625 / .250	QPL6
SMQ1553-6	M21038/27-11	1CT:1CT/1CT:707CT	4,000	.625 / .625 / .250	QPL6
FPQ1553-7	M21038/27-17	1.4CT:1CT/2CT:1CT	7,200	.625 / .625 / .250	QPL6
SMQ1553-7	M21038/27-12	1.4CT:1CT/2CT:1CT	7,200	.625 / .625 / .250	QPL6
FPQ1553-8	M21038/27-18	1.25CT:1CT/1.66CT:1CT	4,000	.625 / .625 / .250	QPL6
SMQ1553-8	M21038/27-13	1.25CT:1CT/1.66CT:1CT	4,000	.625 / .625 / .250	QPL6
FPQ1553-10	M21038/27-20	1CT:2.12CT/1CT:1.5CT	4,000	.625 / .625 / .250	QPL6
SMQ1553-10	M21038/27-15	1CT:2.12CT/1CT:1.5CT	4,000	.625 / .625 / .250	QPL6
FPQ1553-45	M21038/27-31	1CT:2.5CT/1CT:1.79CT	4,000	.625 / .625 / .250	QPL6
SMQ1553-45	M21038/27-27	1CT:2.5CT/1CT:1.79CT	4,000	.625 / .625 / .250	QPL6

1. **Part number options:** C and T level QPL testing (xxQC1553-xx, xxQT1553-xx, M21038/27-xxC, M21038/27-xxT).
2. **Web:** [www.pulseeng.com](http://www.pulseeng.com) home page, pick data sheets "QPL MIL-STD-1553 Interface Transformers" (QPL6.pdf).
3. **Summary Performance Specifications:**  
**Drop** = 20%  
**Overshoot** = ±1 VMAX;  
**Common Mode Rejection** = 45 dB  
**Frequency Range** (no load) = 75 kHz to 1 MHz  
**Operating Temperature Range** = -55°C to +130°C  
**Weight** = 5 grams  
**Insulation Resistance** = 10 kMΩ @ 250 Vdc  
**Dielectric Withstanding Voltage** = 100 Vrms

# MILITARY/AEROSPACE PRODUCTS



Pulse offers off-the-shelf inductors and transformers for modern military and aerospace power applications: the SLED™, the SLIC, and the POGO™ series. The SLED series consists of rail-mount inductors with a ruggedized header for durable board connections, utilizing two rails for board mounting and cores bonded to high temperature headers for durability and mechanical strength. The SLIC series, self-leaded transformers and inductors, have ruggedized construction. The structural header is bonded to the cores and lead wires, increasing mechanical durability. The POGO series are pad-mounted inductors with open construction for robust board mounting with rugged pins used for both surface board-mounting and electrical connection.

Pulse also offers shielded drum core inductors that include ruggedized mounting hardware to improve board mounting performance for enhanced mechanical durability. These inductors eliminate the use of pure tin plating for compliance with military and aerospace requirements. A variety of inductances and current capacity is offered in five different physical sizes to meet the majority of system performance requirements.

## OFF-THE-SHELF POWER INDUCTORS & TRANSFORMERS

### Toroid Power Inductors - SLED Series

Part Number	@ IRATED (μH)	IRATED (A)	DCR (mΩ MAX)	Inductance @0Adc (μH)	Package* L/W/H (in.)	Data Sheet
<b>SLED 20</b>						
PL8100	1.01	3.40	11	1.1	.400 / .345 / .250	M107
PL8101	6.2	1.40	70	7	.400 / .345 / .250	M107
PL8102	176	1.00	125	22.7	.400 / .345 / .250	M107
<b>SLED 30</b>						
PL8110	3.8	4.80	17.3	5.2	.625 / .525 / .400	M107
PL8111	9.4	2.80	43.4	12.3	.625 / .525 / .400	M107
PL8112	29.7	1.40	166	35.3	.625 / .525 / .400	M107
PL8113	114	0.94	380	167	.625 / .525 / .400	M107
<b>SLED 40</b>						
PL8120	2.5	8.00	8.3	3.8	.725 / .575 / .410	M107
PL8121	5.1	5.40	17.7	7.5	.725 / .575 / .410	M107
PL8122	16.2	2.70	72	21.9	.725 / .575 / .410	M107
PL8123	58.1	1.30	290	73	.725 / .575 / .410	M107
PL8124	192	0.90	560	292	.725 / .575 / .410	M107
PL8125	383	0.72	862	672	.725 / .575 / .410	M107
PL8130	4.9	7.80	12.4	7.9	.725 / .575 / .410	M107
PL8131	9	5.50	28	14	.725 / .575 / .410	M107
PL8132	29.1	2.70	100	40.5	.725 / .575 / .410	M107
PL8133	645	0.74	1250	1134	.725 / .575 / .410	M107
PL8150	0.81	14.30	2.5	1.25	.725 / .575 / .410	M107
PL8151	1.32	11.50	4.0	2.1	.725 / .575 / .410	M107
<b>SLED 50</b>						
PL8140	9.3	7.20	18.7	16	.900 / .690 / .520	M107
PL8141	16.1	5.10	32.0	25.9	.900 / .690 / .520	M107
PL8142	50	2.60	133	72.9	.900 / .690 / .520	M107
PL8143	x1070	0.71	1700	1950	.900 / .690 / .520	M107
PL8160	1.68	13.90	3.6	2.8	.900 / .690 / .520	M107
PL8161	2.5	11.40	5.4	4.2	.900 / .690 / .520	M107
PL8170	3.5	12.40	6.6	6.5	.900 / .690 / .520	M107
PL8171	4.7	10.40	8.3	8.4	.900 / .690 / .520	M107

### SMT Common Mode Chokes: SLIC Series

Part Number	Inductance (mH ±35%)	IRATED (A)	DCR (mΩ MAX)	Package* L/W/H (in.)	Data Sheet
<b>SLIC Series, Common Mode Chokes</b>					
PL8200	0.47	14.0	8	1.220 / 1.000 / .500	M108
PL8201	0.63	11.6	10	1.220 / 1.000 / .500	M108
PL8202	0.81	9.70	14	1.220 / 1.000 / .500	M108
PL8203	0.53	7.20	15	1.110 / 1.00 / .395	M108
PL8204	0.59	5.60	21	.770 / .670 / .395	M108
PL8205	0.77	4.70	40	.770 / .670 / .395	M108
PL8206	0.22	3.30	60	.770 / .670 / .390	M108
PL8207	1.32	3.30	60	.770 / .670 / .395	M108
PL8208	1.47	2.80	80	.770 / .670 / .395	M108
PL8209	0.88	1.63	110	.500 / .500 / .215	M108
PL8210	1.17	1.22	200	.500 / .500 / .215	M108

### SMT Power Inductors: SLIC (HCCI-80) Series

Part Number <sup>1</sup>	@ IRATED (μH)	IRATED (A)	DCR (mΩ MAX)	Inductance @0Adc (μH)	Package* L/W/H (in.)	Data Sheet
<b>SLIC (HCCI) Series</b>						
PL8304 P	1.1	38	1.3	2.1	1.220 / 1.000 / .500	M109
PL8303 P	1.6	34	1.6	3.5	1.220 / 1.000 / .500	M109
PL8302 P	2.45	27	2.5	5.1	1.220 / 1.000 / .500	M109
PL8301 P	3.2	24	3.5	7.2	1.220 / 1.000 / .500	M109
PL8304 S	4.3	19	5.1	8.4	1.220 / 1.000 / .500	M109
PL8300 P	4.52	19	4.8	9.5	1.220 / 1.000 / .500	M109
PL8303 S	6.4	17	6.4	13.8	1.220 / 1.000 / .500	M109
PL8302 S	9.8	13.5	10.1	20.4	1.220 / 1.000 / .500	M109
PL8301 S	12.8	12	13.8	28.7	1.220 / 1.000 / .500	M109
PL8300 S	18.1	9.5	19.3	38.0	1.220 / 1.000 / .500	M109

1. Connection: P = Parallel, S = Series

### SMT Power Inductors: Toroid, SLED Series

Part Number	@ IRATED (μH)	IRATED (A)	DCR (mΩ MAX)	Inductance @0Adc (μH)	Package* L/W/H (in.)	Data Sheet
<b>SLED 25</b>						
PL8500	9.4	3.8	32	10.4	.625 / .525 / .310	M113
PL8501	13.3	3.2	46	14.6	.625 / .525 / .310	M113
PL8502	23	2.4	74	25	.625 / .525 / .310	M113
PL8503	50	1.6	135	56	.625 / .525 / .310	M113
PL8504	75	1.3	220	83	.625 / .525 / .310	M113
PL8505	90	1.2	285	100	.625 / .525 / .310	M113
PL8506	137	1	425	152	.625 / .525 / .310	M113
PL8507	200	.82	673	220	.625 / .525 / .310	M113
PL8508	305	.66	972	331	.625 / .525 / .310	M113
PL8509	439	.56	1520	472	.625 / .525 / .310	M113

### SMT Power Inductors: Toroid, POGO Series

Part Number	@ IRATED (μH)	IRATED (A)	DCR (mΩ MAX)	Inductance @0Adc (μH)	Package* L/W/H (in.)	Data Sheet
<b>POGO 25</b>						
PL8600 P	2.0	8.30	76	2.2	.625 / .525 / .310	M114
PL8601 P	2.4	7.20	10.9	2.6	.625 / .525 / .310	M114
PL8602 P	5.0	5.20	19.0	5.5	.625 / .525 / .310	M114
PL8600 S	7.0	4.16	16.0	8.75	.625 / .525 / .310	M114
PL8603 P	9.3	3.80	29.8	10.4	.625 / .525 / .310	M114
PL8601 S	8.4	3.78	21.8	10.4	.625 / .525 / .310	M114
PL8604 P	14.1	3.10	45.3	15.7	.625 / .525 / .310	M114
PL8605 P	19.8	2.6	66.3	22.1	.625 / .525 / .310	M114
PL8602 S	17.9	2.6	38.0	22.45	.625 / .525 / .310	M114
PL8606 P	29.3	2.20	106	32.8	.625 / .525 / .310	M114
PL8603 S	33.8	1.89	60	41.7	.625 / .525 / .310	M114
PL8607 P	42.6	1.80	151	47.6	.625 / .525 / .310	M114
PL8604 S	50.9	1.54	91	62.8	.625 / .525 / .310	M114
PL8608 P	61.3	1.50	224	67.5	.625 / .525 / .310	M114
PL8605 S	71.5	1.30	133	88.2	.625 / .525 / .310	M114

1. Connection: P = Parallel, S = Series

continued →

\*SM = Surface Mount

# MILITARY/AEROSPACE PRODUCTS



## OFF-THE-SHELF POWER INDUCTORS & TRANSFORMERS (continued)

### SMT Power Inductors: Toroid, POGO Series (continued)

Part Number	@ IRATED (μH)	IRATED (A)	DCR (mΩ MAX)	Inductance @0Adc (μH)	Package* L/W/H (in.)	Data Sheet
-------------	---------------	------------	--------------	-----------------------	----------------------	------------

#### POGO 25 (continued)

PL8609 P	84.2	1.20	324	91.0	.625 / .525 / .310	M114
PL8606 S	106.1	1.07	202	131.0	.625 / .525 / .310	M114
PL8607 S	154.2	0.89	302	190.3	.625 / .525 / .310	M114
PL8608 S	218.9	0.74	444	270.2	.625 / .525 / .310	M114
PL8609 S	295.0	0.64	636	364.0	.625 / .525 / .310	M114

#### POGO 40

PL8400 S	43.6	1.1	309	77	.725 / .600 / .380	M111
PL8700 P	1.5	14.40	4.41	2.2	.725 / .600 / .380	M115
PL8701 P	2.4	11.20	6.54	3.5	.725 / .600 / .380	M115
PL8702 P	4.2	8.20	10.47	5.9	.725 / .600 / .380	M115
PL8703 P	5.8	6.80	14.94	7.9	.725 / .600 / .380	M115
PL8700 S	6.1	7.20	17.60	9.0	.725 / .600 / .380	M115
PL8704 P	7.6	5.70	20.99	10.1	.725 / .600 / .380	M115
PL8701 S	9.7	5.60	26.20	14.0	.725 / .600 / .380	M115
PL8705 P	12.1	5.40	23.24	18.5	.725 / .600 / .380	M115
PL8702 S	17.0	4.10	41.90	23.7	.725 / .600 / .380	M115
PL8706 P	18.0	4.40	38.15	27.4	.725 / .600 / .380	M115
PL8703 S	23.1	3.40	59.70	31.5	.725 / .600 / .380	M115
PL8707 P	27.0	3.54	53.21	40.5	.725 / .600 / .380	M115
PL8704 S	30.6	2.85	84.00	40.5	.725 / .600 / .380	M115
PL8708 P	34.8	3.00	73.89	50.5	.725 / .600 / .380	M115
PL8705 S	48.5	2.70	93.00	74.1	.725 / .600 / .380	M115
PL8706 S	72.0	2.20	152.60	109.8	.725 / .600 / .380	M115
PL8708 S	139.1	1.50	295.60	202.2	.725 / .600 / .380	M115
PL8707 S	108.0	1.77	212.80	161.8	.725 / .600 / .380	M115

#### POGO 50

PL8401 S	21.9	2.7	90.5	39.5	.910 / .700 / .510	M111
PL8402 S	4.025	6.4	23	6.575	.910 / .700 / .510	M111
PL8403 P	0.53	23.8	3	0.88	.910 / .700 / .510	M111
PL8404 P	1.1	21	2.5	2.1	.910 / .700 / .510	M111

#### POGO 60

PL8405 P	2.1	22.4	3.4	4	1.280 / 1.070 / .510	M111
----------	-----	------	-----	---	----------------------	------

1. **Connection:** P = Parallel, S = Series

### SMT Common Mode Inductors: Toroid, POGO Series

Part Number	Inductance (mH ±30%)	IRATED (A)	DCR (mΩ MAX)	SRF (MHz)	Impedance Curve <sup>1</sup>	Package* L/W/H (in.)	Data Sheet
-------------	----------------------	------------	--------------	-----------	------------------------------	----------------------	------------


#### POGO 40

PL8801	1.5	1.50	60	2	2	.725 / .575 / .380	M116
PL8803	10.0	1.00	450	0.5	4	.725 / .575 / .380	M116
PL8804	22.0	0.50	850	0.3	5	.725 / .575 / .380	M116

#### POGO 50

PL8800	1.0	3.60	50	4	1	.910 / .700 / .510	M116
PL8802	3.0	2.50	80	2.2	3	.910 / .700 / .510	M116

1. See graph below.

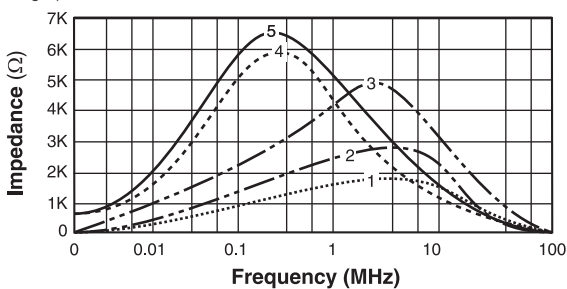

### SMT Power Inductors: Shielded Drum Core

Part Number	Inductance @IRATED (μH TYP)	IRATED <sup>1</sup> (A)	DCR (mΩ MAX)	Inductance @0Adc <sup>2</sup> (μH)	Saturation Current @25°C	Package* L/W/H (in.)	Data Sheet
-------------	-----------------------------	-------------------------	--------------	------------------------------------	--------------------------	----------------------	------------

PL8901	0.80	11	4.0	1.0 <sup>2</sup>	14	.413 / .413 / .280	M117
PL8902	1.20	10	6.0	1.5 <sup>2</sup>	13	.413 / .413 / .280	M117
PL8903	2.1	9.0	7.3	2.7 <sup>2</sup>	11	.413 / .413 / .280	M117
PL8904	2.9	8.0	8.5	3.7 <sup>2</sup>	9.2	.413 / .413 / .280	M117
PL8905	3.7	7.3	9.5	4.7 <sup>2</sup>	8.2	.413 / .413 / .280	M117
PL8906	4.8	6.0	16.5	6.0 <sup>2</sup>	6.9	.413 / .413 / .280	M117
PL8907	6	5.5	18.5	7.6 <sup>2</sup>	6.2	.413 / .413 / .280	M117
PL8908	8	5.0	21.8	10	5.5	.413 / .413 / .280	M117
PL8909	9.6	4.5	29.0	12	5.1	.413 / .413 / .280	M117
PL8910	12	4.1	35.4	15	4.4	.413 / .413 / .280	M117
PL8911	14.4	4.0	37.0	18	4.3	.413 / .413 / .280	M117
PL8912	17.6	3.8	42.0	22	3.8	.413 / .413 / .280	M117
PL8913	21.6	3.4	45.9	27	3.4	.413 / .413 / .280	M117
PL8914	26.4	3.0	64.8	33	3.0	.413 / .413 / .280	M117
PL8915	31.2	2.7	81.5	39	2.8	.413 / .413 / .280	M117
PL8916	37.6	2.6	89.0	47	2.6	.413 / .413 / .280	M117
PL8917	54.4	2.1	135.0	68	2.1	.413 / .413 / .280	M117
PL9101	0.96	10.5	4.5	1.0 <sup>2</sup>	12.7	.413 / .413 / .248	M121
PL9102	1.52	9.5	5.5	1.8 <sup>2</sup>	10.1	.413 / .413 / .248	M121
PL9103	2.34	7.8	7.8	2.7 <sup>2</sup>	8.4	.413 / .413 / .248	M121
PL9104	3.27	6.7	11.0	3.9 <sup>2</sup>	7.2	.413 / .413 / .248	M121
PL9105	4.39	5.6	15.6	5.1 <sup>2</sup>	6.3	.413 / .413 / .248	M121
PL9106	5.54	5.2	18.0	6.8 <sup>2</sup>	5.6	.413 / .413 / .248	M121
PL9107	6.73	5.0	20.0	8.2 <sup>2</sup>	5.1	.413 / .413 / .248	M121
PL9108	8.19	4.6	22	10	4.6	.413 / .413 / .248	M121
PL9109	9.9	4.2	27	12	4.2	.413 / .413 / .248	M121
PL9110	13.4	3.6	30	15	3.6	.413 / .413 / .248	M121
PL9111	15.4	3.4	40	18	3.4	.413 / .413 / .248	M121
PL9112	17.6	3.2	45	22	3.2	.413 / .413 / .248	M121
PL9113	22.5	2.8	62	27	2.8	.413 / .413 / .248	M121
PL9114	28.5	2.5	70	33	2.5	.413 / .413 / .248	M121
PL9115	31.4	2.4	75	39	2.4	.413 / .413 / .248	M121
PL9116	38.4	2.2	100	47	2.2	.413 / .413 / .248	M121
PL9117	48.3	1.9	110	56	1.9	.413 / .413 / .248	M121
PL9118	55.9	1.8	120	68.0	1.8	.413 / .413 / .248	M121
PL9119	67.6	1.7	178	82.0	1.7	.413 / .413 / .248	M121
PL9120	86.1	1.4	230	100.0	1.4	.413 / .413 / .248	M121
PL9121	103	1.3	253	120.0	1.3	.413 / .413 / .248	M121
PL9122	121	1.2	280	150.0	1.2	.413 / .413 / .248	M121
PL9123	149	1.1	310	180.0	1.1	.413 / .413 / .248	M121
PL9124	186	1.0	400	220.0	1.0	.413 / .413 / .248	M121
PL9125	224	0.91	460	270	0.91	.413 / .413 / .248	M121
PL9126	279	0.82	690	330	0.82	.413 / .413 / .248	M121
PL9127	335	0.72	760	390	0.72	.413 / .413 / .248	M121
PL9128	398	0.68	850	470	0.68	.413 / .413 / .248	M121
PL9129	464	0.63	1060	560	0.63	.413 / .413 / .248	M121
PL9130	563	0.57	1200	680	0.57	.413 / .413 / .248	M121
PL9131	681	0.52	1550	820	0.52	.413 / .413 / .248	M121
PL9132	879	0.46	1750	1000	0.46	.413 / .413 / .248	M121
PL9201	0.95	8.7	5.7	1.0 <sup>2</sup>	11	.413 / .413 / .201	M122
PL9202	1.55	7.4	7.9	1.6 <sup>2</sup>	8.8	.413 / .413 / .201	M122
PL9203	2.32	6.6	10.0	2.7 <sup>2</sup>	7.3	.413 / .413 / .201	M122
PL9204	3.24	5.5	14.5	3.6 <sup>2</sup>	6.3	.413 / .413 / .201	M122

- The rated current as listed is either the saturation current or the heating current depending on which value is lower.
- Inductance at 0Adc tolerance is ±30%. The tolerance is ±20% on all other parts. **Optional** Tape and Reel packaging can be ordered by adding a "T" suffix to the end of the part number.

continued →

\*SM = Surface Mount

## MILITARY/AEROSPACE PRODUCTS



## OFF-THE-SHELF POWER INDUCTORS &amp; TRANSFORMERS (continued)

## SMT Power Inductors: Shielded Drum Core (continued)

Part Number	Inductance @IRATED (μH TYP)	IRATED <sup>1</sup> (A)	DCR (mΩ MAX)	Inductance @0A <sub>DC</sub> <sup>2</sup> (μH)	Saturation Current @25°C	Package* L/W/H (in.)	Data Sheet	Part Number	Inductance @IRATED (μH TYP)	IRATED <sup>1</sup> (A)	DCR (mΩ MAX)	Inductance @0A <sub>DC</sub> <sup>2</sup> (μH)	Saturation Current @25°C	Package* L/W/H (in.)	Data Sheet
PL9205	4.26	5.1	16.5	4.5 <sup>2</sup>	5.5	.413 / .413 / .201	M122	PL9401	0.67	8.50	4.4	0.68 ±25%	8.50	.410 / .410 / .132	M123
PL9206	5.64	4.4	22	6.0 <sup>2</sup>	4.9	.413 / .413 / .201	M122	PL9402	1.3	6.10	6.4	1.5 ±25%	6.10	.410 / .410 / .132	M123
PL9207	7.17	4.2	25	7.6 <sup>2</sup>	4.4	.413 / .413 / .201	M122	PL9403	2.1	5.70	10.4	2.2 ±25%	5.70	.410 / .410 / .132	M123
PL9208	9.3	3.6	35	10	4.0	.413 / .413 / .201	M122	PL9404	3.1	4.80	15.6	3.3 ±25%	4.80	.410 / .410 / .132	M123
PL9209	10.8	3.3	37	12	3.7	.413 / .413 / .201	M122	PL9405	4.5	4.10	21.2	4.7 ±25%	4.10	.410 / .410 / .132	M123
PL9210	13.4	3.0	47	15	3.4	.413 / .413 / .201	M122	PL9406	5.8	3.60	25.2	6.2 ±25%	3.60	.410 / .410 / .132	M123
PL9211	17.5	2.7	58	18	2.9	.413 / .413 / .201	M122	PL9407	7.0	3.30	27.8	6.8 ±25%	3.30	.410 / .410 / .132	M123
PL9212	19.4	2.6	67	22	2.8	.413 / .413 / .201	M122	PL9408	9.4	3.00	39.5	8.2 ±30%	3.00	.410 / .410 / .132	M123
PL9213	24.2	2.2	79	27	2.4	.413 / .413 / .201	M122	PL9409	11	2.70	42.9	10 ±20%	2.70	.410 / .410 / .132	M123
PL9214	30.6	2.1	94	33	2.2	.413 / .413 / .201	M122	PL9410	12	2.40	50.0	12 ±20%	2.40	.410 / .410 / .132	M123
PL9215	38.5	1.8	126	39	2.0	.413 / .413 / .201	M122	PL9411	15	2.25	65.2	15 ±20%	2.25	.410 / .410 / .132	M123
PL9216	46.1	1.7	140	47	1.8	.413 / .413 / .201	M122	PL9412	24	1.85	86.1	22 ±25%	1.85	.410 / .410 / .132	M123
PL9217	53.2	1.6	157	56	1.7	.413 / .413 / .201	M122	PL9413	35	1.40	125.6	33 ±20%	1.40	.410 / .410 / .132	M123
PL9218	63.1	1.45	202	68.0	1.6	.413 / .413 / .201	M122	PL9414	48	1.25	187.7	47 ±20%	1.25	.410 / .410 / .132	M123
PL9219	76.6	1.36	232	82.0	1.4	.413 / .413 / .201	M122	PL9415	55	1.15	207.9	56 ±20%	1.15	.410 / .410 / .132	M123
PL9220	88	1.29	270	100.0	1.3	.413 / .413 / .201	M122	PL9416	64	1.05	279.5	68 ±20%	1.05	.410 / .410 / .132	M123
PL9221	112	1.07	316	120.0	1.2	.413 / .413 / .201	M122	PL9417	88	0.94	317.3	82 ±20%	0.94	.410 / .410 / .132	M123
PL9222	135	1.02	456	150.0	1.05	.413 / .413 / .201	M122	PL9418	106	0.88	357.8	100 ±20%	0.88	.410 / .410 / .132	M123
PL9223	132	0.87	497	180.0	0.96	.413 / .413 / .201	M122	PL9419	129	0.80	477.9	120 ±20%	0.80	.410 / .410 / .132	M123
PL9224	198	0.82	681	220.0	0.86	.413 / .413 / .201	M122	PL9420	157	0.70	545.4	150 ±20%	0.70	.410 / .410 / .132	M123
PL9225	237	0.78	775	270	0.79	.413 / .413 / .201	M122	PL9421	238	0.58	837.0	220 ±20%	0.58	.410 / .410 / .132	M123
PL9226	296	0.66	955	330	0.71	.413 / .413 / .201	M122	PL9422	325	0.45	1198.8	330 ±20%	0.45	.410 / .410 / .132	M123
PL9227	355	0.58	1087	390	0.66	.413 / .413 / .201	M122	PL9501	2.15	2.60	17.6	2.5	2.6	.256 / .256 / .122	M124
PL9228	445	0.54	1403	470	0.59	.413 / .413 / .201	M122	PL9502	2.58	2.30	20.3	3.3	2.3	.256 / .256 / .122	M124
PL9229	495	0.53	1623	560	0.54	.413 / .413 / .201	M122	PL9503	3.43	2.10	27.0	4	2.1	.256 / .256 / .122	M124
PL9230	610	0.49	1824	680	0.49	.413 / .413 / .201	M122	PL9504	4.63	1.85	31.1	5	1.85	.256 / .256 / .122	M124
PL9231	702	0.43	2355	820	0.45	.413 / .413 / .201	M122	PL9505	5.22	1.70	41.9	6	1.7	.256 / .256 / .122	M124
PL9232	890	0.40	2850	1000	0.41	.413 / .413 / .201	M122	PL9506	6.57	1.50	49.9	8	1.5	.256 / .256 / .122	M124
PL9301	0.62	7.60	5.5	0.68 ±25%	10	.410 / .410 / .157	M120	PL9507	8.65	1.30	54.0	10	1.3	.256 / .256 / .122	M124
PL9302	1.2	7.10	7.3	1.3 ±25%	8	.410 / .410 / .157	M120	PL9508	9.78	1.20	72.0	12	1.2	.256 / .256 / .122	M124
PL9303	1.9	5.80	10.9	2.2 ±25%	6.15	.410 / .410 / .157	M120	PL9509	12.13	1.10	82.0	15	1.1	.256 / .256 / .122	M124
PL9304	2.8	5.20	13.3	3.3 ±25%	5.8	.410 / .410 / .157	M120	PL9510	15.23	1.05	102.0	18	1.05	.256 / .256 / .122	M124
PL9305	4.0	4.70	19.6	4.7 ±25%	5.4	.410 / .410 / .157	M120	PL9511	18.7	0.95	119.0	22	0.95	.256 / .256 / .122	M124
PL9306	5.4	3.70	27.0	6.0 ±25%	4.5	.410 / .410 / .157	M120	PL9512	21.54	0.85	146.0	27	0.85	.256 / .256 / .122	M124
PL9307	6.9	3.50	30.8	7.6 ±25%	4	.410 / .410 / .157	M120	PL9513	27.71	0.76	183.0	33	0.76	.256 / .256 / .122	M124
PL9308	8.0	3.40	33.2	10 ±20%	3.8	.410 / .410 / .157	M120	PL9514	33.57	0.68	210.0	39	0.68	.256 / .256 / .122	M124
PL9309	11	3.00	45.2	12 ±20%	3.4	.410 / .410 / .157	M120	PL9515	40.15	0.60	230.0	47	0.6	.256 / .256 / .122	M124
PL9310	12	2.80	49.4	15 ±20%	3.1	.410 / .410 / .157	M120	PL9516	49.68	0.55	305.0	56	0.55	.256 / .256 / .122	M124
PL9311	19	2.30	77.2	22 ±20%	2.8	.410 / .410 / .157	M120	PL9517	60.66	0.48	351.0	68	0.48	.256 / .256 / .122	M124
PL9312	25	2.10	89.1	27 ±20%	2.3	.410 / .410 / .157	M120	PL9518	74.71	0.45	419.0	82	0.45	.256 / .256 / .122	M124
PL9313	38	1.65	141.9	47 ±20%	2.1	.410 / .410 / .157	M120	PL9519	85.39	0.40	520.0	100	0.4	.256 / .256 / .122	M124
PL9314	55	1.32	212.0	68 ±20%	1.5	.410 / .410 / .157	M120								
PL9315	83	1.10	327.9	100 ±20%	1.35	.410 / .410 / .157	M120								
PL9316	123	0.88	499.9	150 ±20%	1.15	.410 / .410 / .157	M120								
PL9317	178	0.73	738.6	220 ±20%	0.92	.410 / .410 / .157	M120								
PL9318	278	0.60	1132.8	330 ±20%	0.7	.410 / .410 / .157	M120								

continued →

1. The rated current as listed is either the saturation current or the heating current depending on which value is lower.

2. Inductance at 0A<sub>DC</sub> tolerance is ±30%. The tolerance is ±20% on all other parts.

Optional Tape and Reel packaging can be ordered by adding a "T" suffix to the end of the part number.

\*SM = Surface Mount