

# COMMON MODE CHOKE CATALOG

Suited for LAN and Telecom Applications



**Pulse**  
A TECHNITROL COMPANY

## *TABLE of CONTENTS*


### **Common Mode Chokes for Datacom Applications**





|  |      |
|--|------|
| Surface Mount Common Mode Chokes ..... | 2-6  |
| Through Hole Common Mode Chokes .....  | 7-12 |

Downloaded from [Elcodis.com](http://Elcodis.com) electronic components distributor
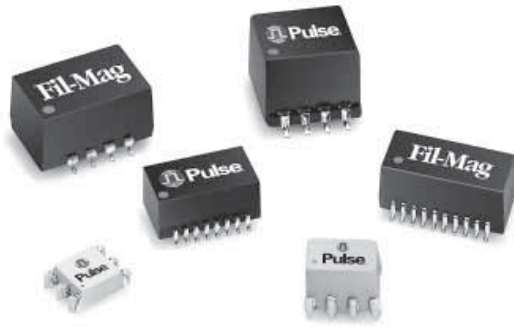
# SURFACE MOUNT COMMON MODE CHOKES

Suited for LAN and Telecom Applications



-  Reduces radiated EMI emissions
-  Filters common mode noise for EMI reduction
-  Common mode attenuation from 100 kHz to 1 GHz
-  Tape & Reel packaging available for surface mount parts\*

## Electrical Specifications @ 25°C




| Part Number | No. of Ports | Primary Inductance OCL (μH MIN) | Common Mode Attenuation (db TYP) |       |        |        |        |         |         |         |       | DCR (Ω MAX) | Page Number Mech & Schem |
|-------------|--------------|---------------------------------|----------------------------------|-------|--------|--------|--------|---------|---------|---------|-------|-------------|--------------------------|
|             |              |                                 | 100 KHz                          | 1 MHz | 10 MHz | 30 MHz | 50 MHz | 100 MHz | 300 MHz | 500 MHz | 1 GHz |             |                          |
| PE-68624    | 2            | 47                              | 11                               | 27    | 40     | 44     | 42     | 36      | 26      | 17      | —     | 0.40        | 2                        |
| PE-65855    | 2            | 4700                            | 41                               | 43    | 49     | 39     | 34     | 26      | 20      | 20      | 12    | 1.0         | 4                        |
| B2013       | 2            | 6300                            | 46                               | 47    | 43     | 32     | 25     | 29      | 21      | 14      | 16    | 1.0         | 3                        |
| B4003       | 2            | 4700                            | 42                               | 41    | 48     | 38     | 33     | 21      | 22      | 23      | 17    | 1.0         | 6                        |
| 23Z87SM     | 3            | 69                              | 9                                | 24    | 31     | 30     | 29     | 27      | 21      | 16      | —     | 0.20        | 4                        |
| PE-65857    | 4            | 22.5                            | 7                                | 20    | 30     | 37     | 38     | 34      | 24      | 13      | —     | 0.22        | 4                        |
| PE-68627    | 4            | 24                              | 8                                | 21    | 32     | 36     | 37     | 36      | 30      | 20      | —     | 0.25        | 4                        |
| T8003       | 4            | 33                              | 9                                | 13    | 32     | 32     | 30     | 27      | 16      | 17      | 13    | 0.20        | 6                        |
| 23Z4000SMD  | 4            | 36                              | 7                                | 23    | 35     | 38     | 38     | 36      | 29      | 24      | —     | 0.50        | 5                        |
| PE-65854    | 4            | 47                              | 3                                | 19    | 32     | 36     | 35     | 29      | 12      | 6       | —     | 0.40        | 3                        |
| 23Z104SM    | 4            | 68                              | 8                                | 22    | 28     | 28     | 27     | 25      | 20      | 15      | —     | 0.20        | 5                        |
| PE-67540    | 4            | 100                             | 14                               | 33    | 44     | 48     | 49     | 44      | 34      | 29      | 20    | 0.60        | 4                        |
| PE-65853    | 4            | 4700                            | 40                               | 51    | 38     | 30     | 25     | 20      | 14      | 13      | —     | 1.20        | 3                        |
| 23Z106SM    | 6            | 68                              | 8                                | 22    | 29     | 30     | 30     | 29      | 24      | 19      | —     | 0.20        | 5                        |
| PE-69011    | 8            | 36                              | 8                                | 24    | 36     | 39     | 35     | 29      | 18      | 11      | —     | 0.35        | 3                        |
| 23Z105SM    | 8            | 68                              | 8                                | 24    | 30     | 29     | 27     | 24      | 16      | 11      | —     | 0.20        | 5                        |
| 23Z109SM    | 10           | 7.5                             | 4                                | 9     | 20     | 25     | 26     | 24      | 16      | 11      | —     | 0.20        | 5                        |
| T8008       | 16           | 47                              | 7                                | 27    | 40     | 44     | 42     | 36      | 26      | —       | —     | 0.40        | 6                        |

\* When ordering Tape & Reel packaging, add a "T" at the end of the part number (i.e. PE-65738T or 23Z106SMT).

**NOTE:** Additional common mode chokes are available. Please contact Applications Engineering.

### Mechanical

### Schematic

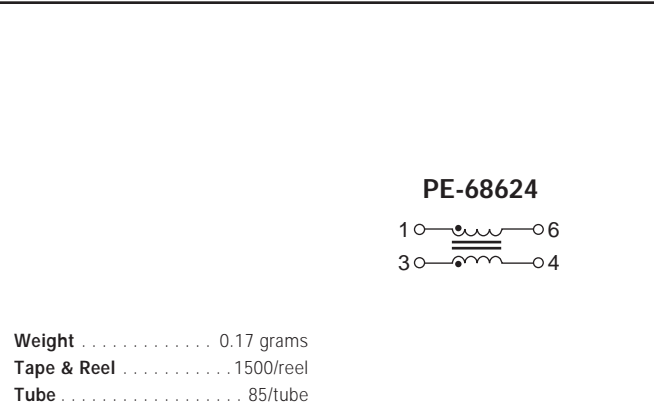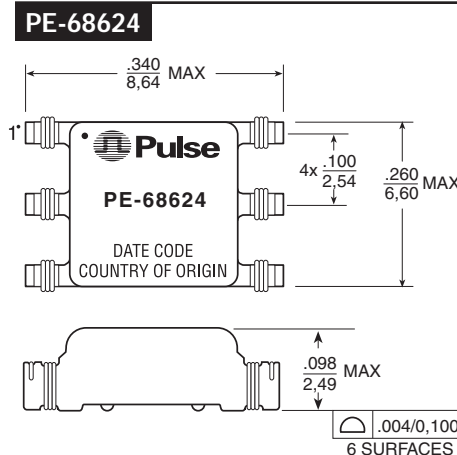

Downloaded from [Elcodis.com](http://Elcodis.com) electronic components distributor

# SURFACE MOUNT COMMON MODE CHOKES


Suited for LAN and Telecom Applications



Mechanical

Schematic

## PE-69011

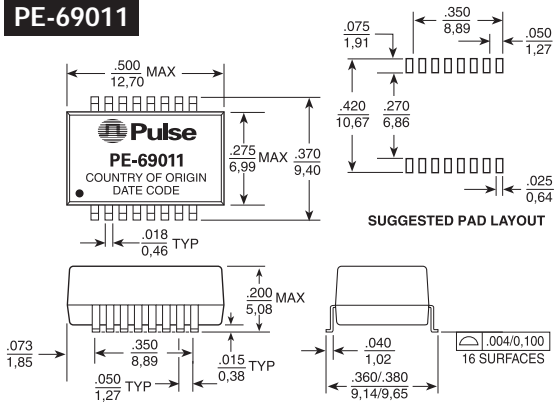

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$


Unless otherwise specified,  
all tolerances are  $\pm 0,10$   
0,25

Weight . . . . . 0.83 grams


Tape & Reel . . . . . 900/reel

Tube . . . . . 40/tube

## PE-69011



## PE-65853

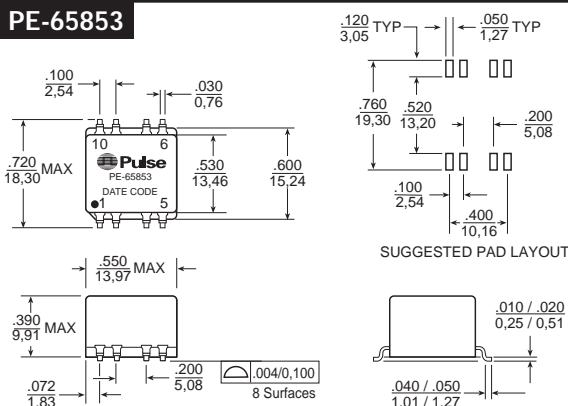

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$


Unless otherwise specified,  
all tolerances are  $\pm 0,10$   
0,25

Weight . . . . . 4.0 grams


Tape & Reel . . . . . 150/reel

Tube . . . . . 35/tube

## PE-65853



## B2013

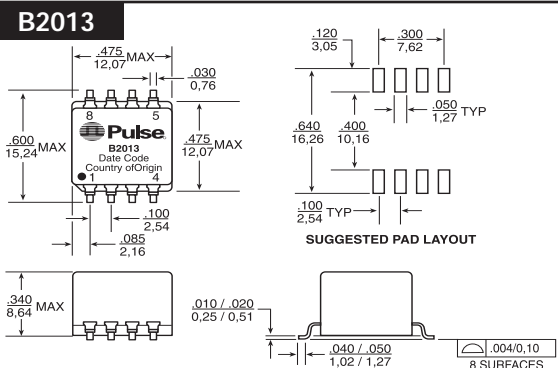

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,  
all tolerances are  $\pm 0,10$   
0,25


Weight . . . . . 9.5 grams

Tray . . . . . 30/tray

## B2013



## PE-65854

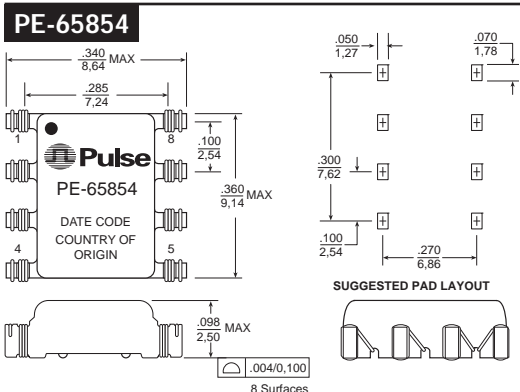

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$


Unless otherwise specified,  
all tolerances are  $\pm 0,10$   
0,25

Weight . . . . . 0.3 grams

Tape & Reel . . . . . 1500/reel

Tube . . . . . 60/tube

## PE-65854




# SURFACE MOUNT COMMON MODE CHOKES

Suited for LAN and Telecom Applications



## Mechanical

## Schematic

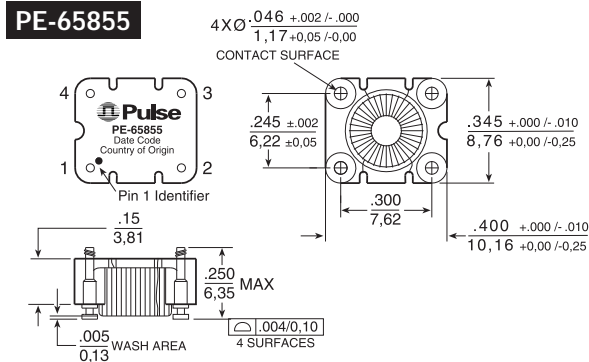


**Dimensions:** Inches  
mm

Unless otherwise specified,  
all tolerances are  $\pm .010$   
0,25

**Weight** . . . . . 0.69 grams  
**Tape & Reel** . . . . . 800/reel  
**Tube** . . . . . 40 /tube

**PE-65855**

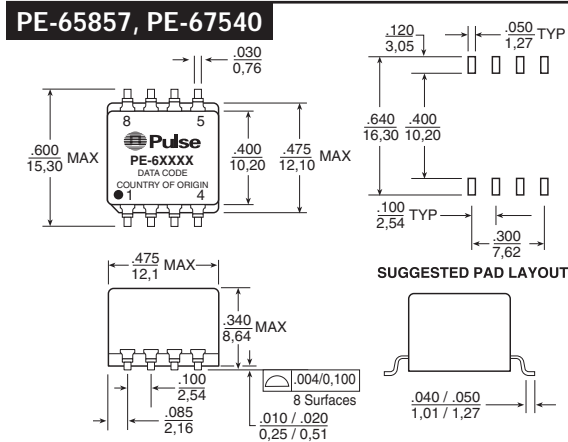




**Dimensions:** Inches  
mm

Unless otherwise specified,  
all tolerances are  $\pm .010$   
0,25

**Weight** . . . . . 2.0 grams  
**Tape & Reel** . . . . . 250/reel  
**Tube** . . . . . 40/tube

**PE-65857**

**PE-67540**

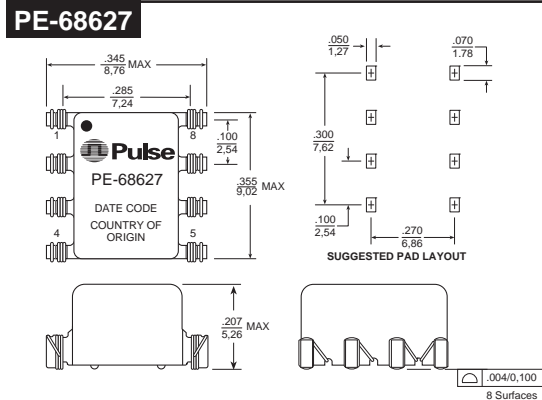



**Dimensions:** Inches  
mm

Unless otherwise specified,  
all tolerances are  $\pm .010$   
0,25

**Weight** . . . . . 0.3 grams  
**Tape & Reel** . . . . . 1500/reel  
**Tube** . . . . . 55/tube

**PE-68627**

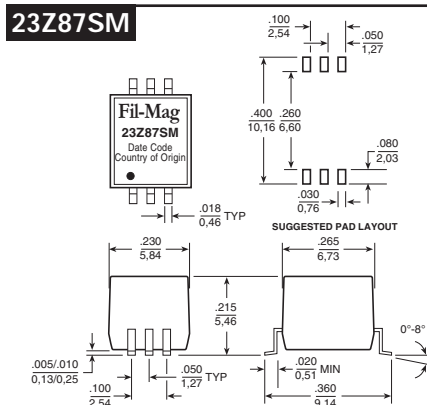

**Dimensions:** Inches  
mm

Unless otherwise specified,  
all tolerances are  $\pm .005$   
0,13

**Weight** . . . . . 0.5 grams  
**Tape & Reel** . . . . . 750/reel  
**Tube** . . . . . 100/tube

**23Z87SM**



# SURFACE MOUNT COMMON MODE CHOKES


Suited for LAN and Telecom Applications



Mechanical

Schematic

## 23Z104SM

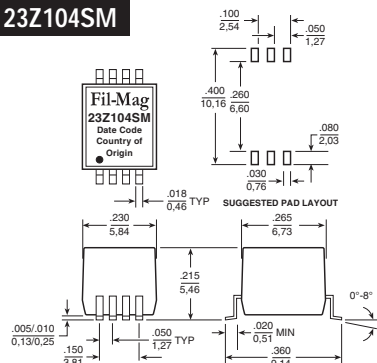


Dimensions:  $\frac{\text{Inches}}{\text{mm}}$


Unless otherwise specified,  
all tolerances are  $\pm .005$   
0,13

Weight . . . . . 0.5 grams  
Tape & Reel . . . . . 750/reel  
Tube . . . . . 100/tube

## 23Z104SM



## 23Z105SM, 23Z106SM

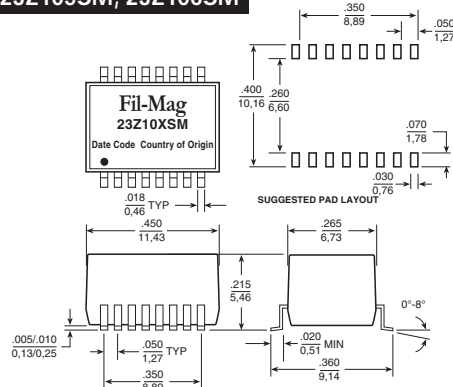


Dimensions:  $\frac{\text{Inches}}{\text{mm}}$


Unless otherwise specified,  
all tolerances are  $\pm .005$   
0,13

23Z105SM 23Z106SM  
Weight . . . . . 0.8 grams . . . . . 1.0 grams  
Tape & Reel . . . . . 750/reel . . . . . 750/reel  
Tube . . . . . 50/tube . . . . . 50/tube


## 23Z105SM



## 23Z106SM



## 23Z109SM

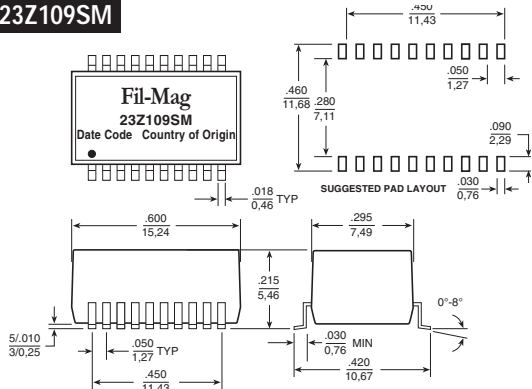


Dimensions:  $\frac{\text{Inches}}{\text{mm}}$


Unless otherwise specified,  
all tolerances are  $\pm .005$   
0,13

Weight . . . . . 1.3 grams  
Tape & Reel . . . . . 500/reel  
Tube . . . . . 38/tube

## 23Z109SM



## 23Z4000SMD

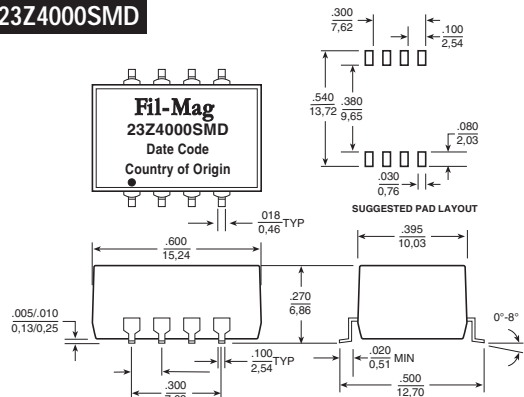


Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,  
all tolerances are  $\pm .005$   
0,13

Weight . . . . . 2.1 grams  
Tape & Reel . . . . . 350/reel  
Tube . . . . . 38/tube

## 23Z4000SMD



# SURFACE MOUNT COMMON MODE CHOKES

Suited for LAN and Telecom Applications



## Mechanical

## Schematic

### T8003



Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,  
all tolerances are  $\pm .005$ -  
 $0,13$

Weight . . . . . 0.84 grams  
Tape & Reel . . . . . 750/reel  
Tube . . . . . 100/tube

### T8003



### T8055



Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,  
all tolerances are  $\pm .010$ -  
 $0,25$

Weight . . . . . 0.2 grams  
Tape & Reel . . . . . 1750/reel  
Tube . . . . . 80/tube

### T8055



### B4003



Dimensions:  $\frac{\text{Inches}}{\text{mm}}$


Unless otherwise specified,  
all tolerances are  $\pm .010$ -  
 $0,25$

Weight . . . . . 1.0 grams  
Tape & Reel . . . . . 425/reel  
Tube . . . . . 50/tube

### B4003



### T8008

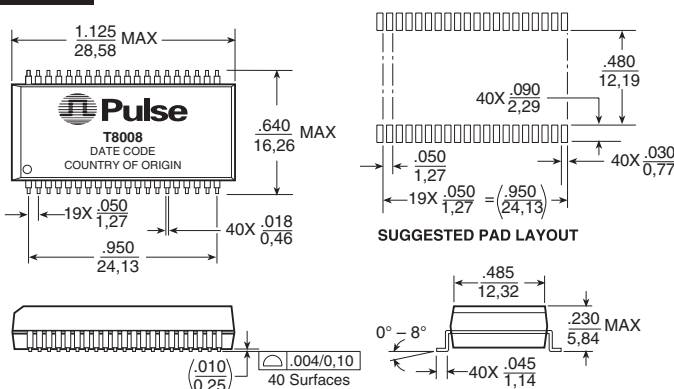


Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,  
all tolerances are  $\pm .010$ -  
 $0,25$

Weight . . . . . 4.0 grams  
Tape & Reel . . . . . 250/reel  
Tube . . . . . 15/tube

### T8008

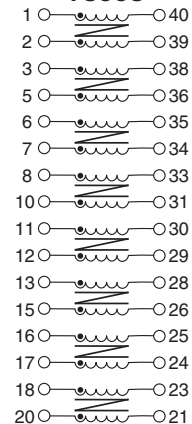


NOTE: The common mode test circuit for surface mount is the same as for through hole and is on the back page.

USA 858 674 8100 • Germany 49 7032 7806 0 • Singapore 65 6287 8998 • Shanghai 86 21 32181071 • China 86 755 33966678 • Taiwan 886 3 4643715

# THROUGH HOLE COMMON MODE CHOKES

Suited for LAN and Telecom Applications

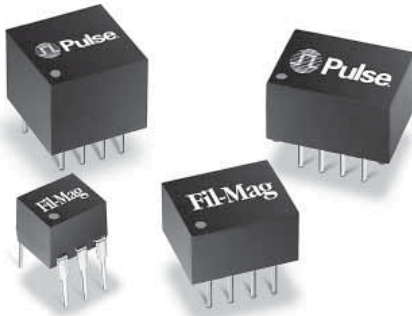

- Reduces radiated EMI emissions
- Filters common mode noise for EMI reduction
- Common mode attenuation from 100 kHz to 1 GHz
- Tube packaging available for through hole parts


## Electrical Specifications @ 25°C

| Part Number | No. of Lines | Primary Inductance OCL (μH MIN) | Common Mode Attenuation (dB TYP) |       |        |        |        |         |         |         | DCR (Ω MAX) | Page Number Mech & Schem |       |
|-------------|--------------|---------------------------------|----------------------------------|-------|--------|--------|--------|---------|---------|---------|-------------|--------------------------|-------|
|             |              |                                 | 100 kHz                          | 1 MHz | 10 MHz | 30 MHz | 50 MHz | 100 MHz | 300 MHz | 500 MHz |             |                          | 1 GHz |
| PE-65944    | 2            | 24                              | 1                                | 14    | 28     | 32     | 33     | 28      | 13      | 5       | —           | 0.30                     | 8     |
| PE-67531    | 2            | 140                             | 14                               | 34    | 45     | 49     | 50     | 47      | 38      | 32      | 25          | 0.60                     | 9     |
| B2005       | 2            | 9000                            | 47                               | 47    | 41     | 30     | 22     | 33      | 21      | 15      | 15          | 1.0                      | 10    |
| PE-65554    | 4            | 24                              | —                                | 21    | 32     | 38     | 39     | 34      | 24      | 13      | —           | 0.30                     | 8     |
| PE-68002    | 4            | 68                              | 7                                | 24    | 37     | 41     | 42     | 40      | 31      | 27      | —           | 0.35                     | 9     |
| 23Z104      | 4            | 85                              | 8                                | 23    | 29     | 29     | 28     | 25      | 17      | 11      | —           | 0.20                     | 10    |
| PE-67539    | 4            | 140                             | 14                               | 33    | 44     | 48     | 48     | 43      | 33      | 28      | 19          | 0.60                     | 9     |
| PE-65542    | 4            | 1000                            | 28                               | 41    | 42     | 32     | 22     | —       | —       | —       | —           | 0.70                     | 8     |
| PT5039      | 4            | 3600                            | 42                               | 43    | 42     | 32     | 27     | 17      | 15      | 9       | 13          | 0.50                     | 8     |
| J0010D11    | 4            | —                               | 9                                | 13    | 32     | 35     | 35     | 29      | 13      | 24      | 19          | 0.50                     | 10    |
| PE-65950    | 4            | 4700±30%                        | 40                               | 51    | 37     | 28     | 23     | 20      | —       | —       | —           | 1.00                     | 8     |
| PE-65541    | 4            | 6000                            | 44                               | 54    | 33     | 32     | 29     | —       | —       | —       | —           | 1.40                     | 8     |
| PE-68613    | 4            | 3290                            | 40                               | 51    | 37     | 28     | 23     | 20      | —       | —       | —           | 1.00                     | 10    |

## Mechanical

## Schematic


### PE-65541, PE-65542, PE-65950

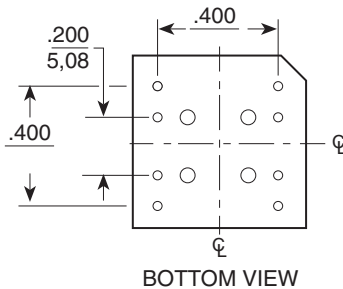

Dimensions: Inches \_\_\_\_\_  
mm \_\_\_\_\_  
Unless otherwise specified,  
all tolerances are ± .010  
0,25

Weight . . . . . 0.38 grams  
Tube . . . . . 35/tube

**PE-65541**  
**PE-65542**  
**PE-65950**



# THROUGH HOLE COMMON MODE CHOKES

Suited for LAN and Telecom Applications



Mechanical

Schematic

**PE-65554**



**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0,25}$

**Weight** . . . . . 2.5 grams  
**Tube** . . . . . 35/tube

**PE-65554**



**PT5039**




**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0,25}$

**Weight** . . . . . 2.5 grams  
**Tube** . . . . . 35/tube

**PT5039**



**PE-65944**

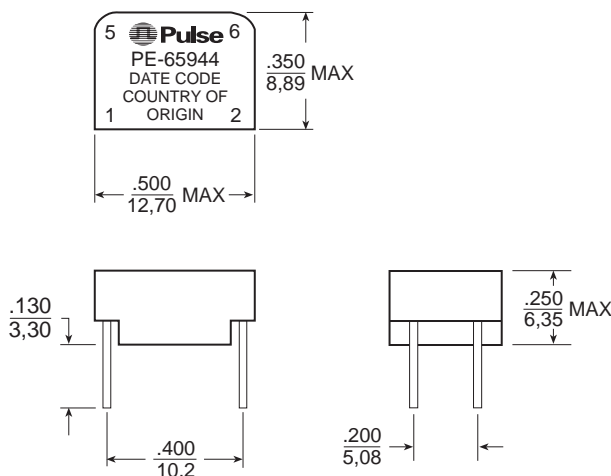

**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0,25}$

**Weight** . . . . . 1.07 grams  
**Tube** . . . . . 30/tube

**PE-65944**





# THROUGH HOLE COMMON MODE CHOKES


Suited for LAN and Telecom Applications



Mechanical

Schematic


**PE-67539**

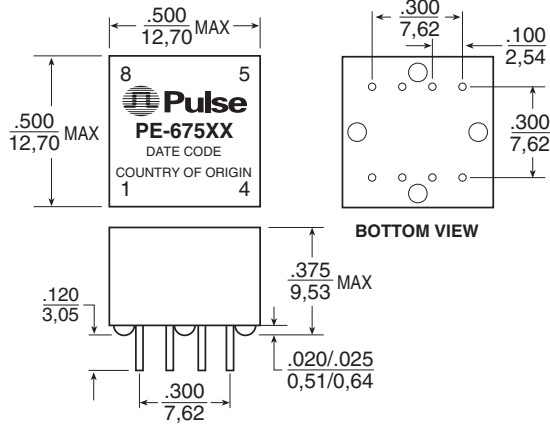


Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0,25}$

Weight . . . . . 2.4 grams  
Tube . . . . . 40/tube

**PE-67539**



**PE-67531**

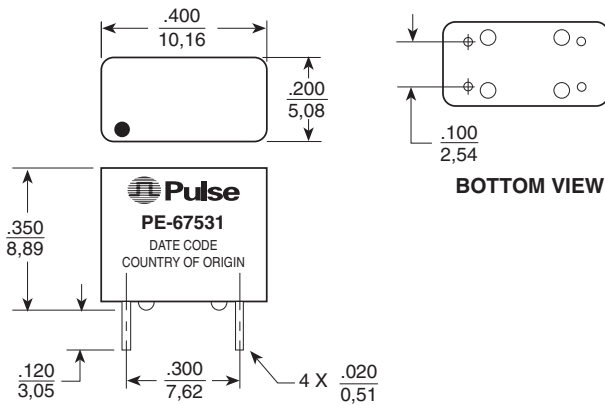


Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0,25}$

Weight . . . . . 0.76 grams  
Tube . . . . . 40/tube

**PE-67531**




**PE-68002**

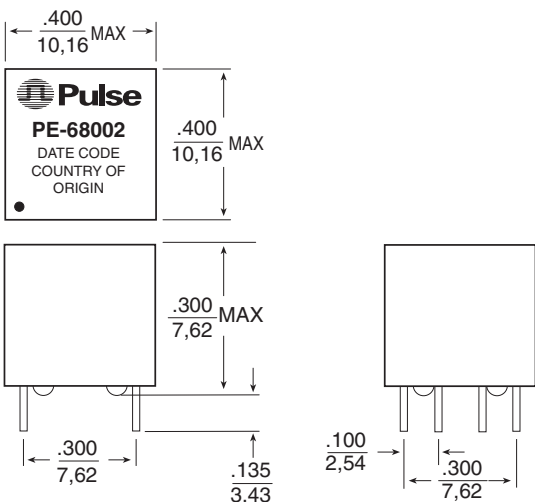

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0,25}$

Weight . . . . . 1.4 grams  
Tube . . . . . 50/tube

**PE-68002**



# THROUGH HOLE COMMON MODE CHOKES


Suited for LAN and Telecom Applications



## Mechanical

## Schematic

### B2005

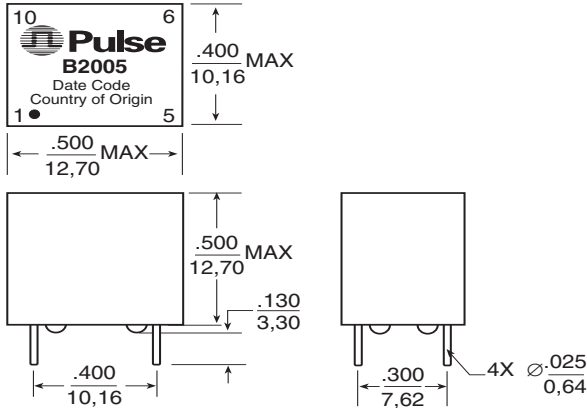


Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm \frac{.005}{0,13}$

Weight . . . . . 3.7 grams  
Tube . . . . . 40/tube

### B2005




### 23Z104

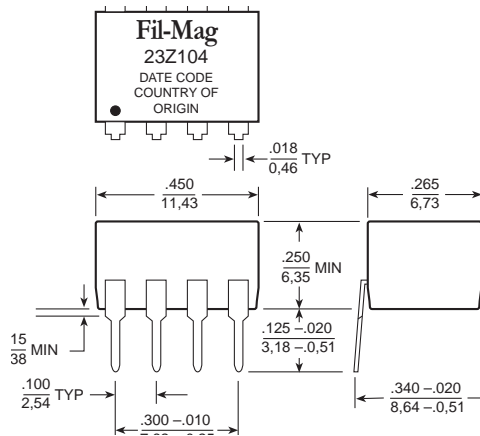


Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm \frac{.005}{0,13}$

Weight . . . . . 1.0 grams  
Tube . . . . . 50/tube

### 23Z104




### PE-68613

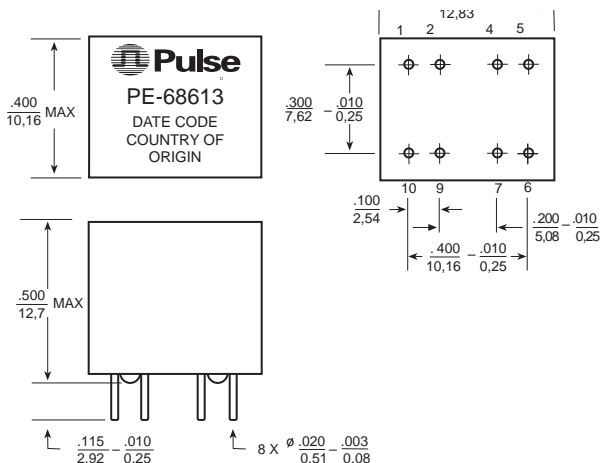

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm \frac{.005}{0,127}$

Weight . . . . . 3.5 grams  
Tube . . . . . 40/tube

### PE-68613




# THROUGH HOLE COMMON MODE CHOKES


Suited for LAN and Telecom Applications



## J0010D11 - Filtered Connector

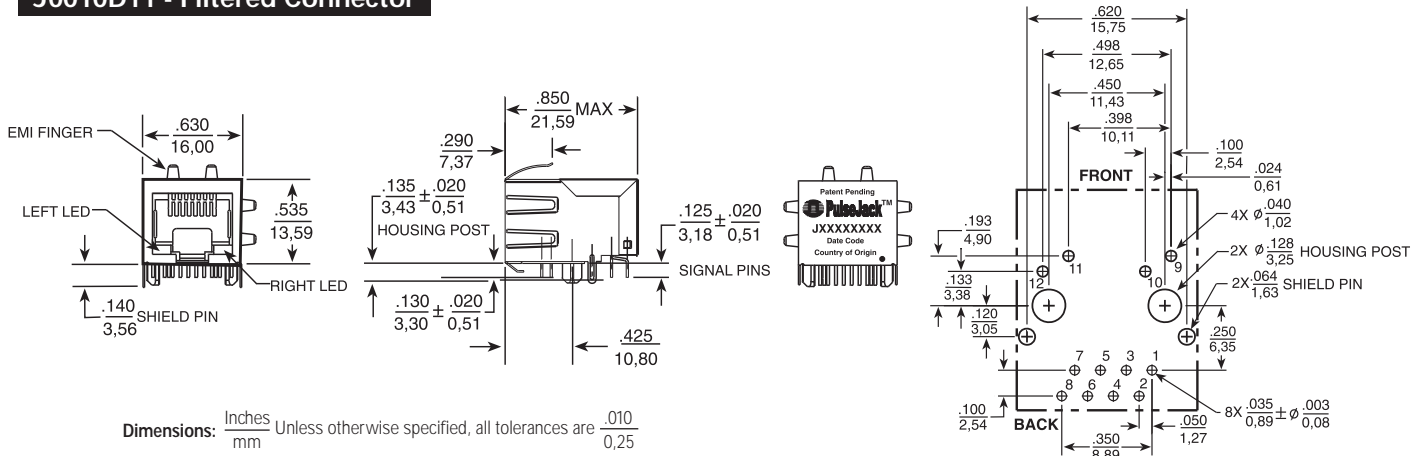

## Common Mode Test Circuit for Surface Mount and Through Hole

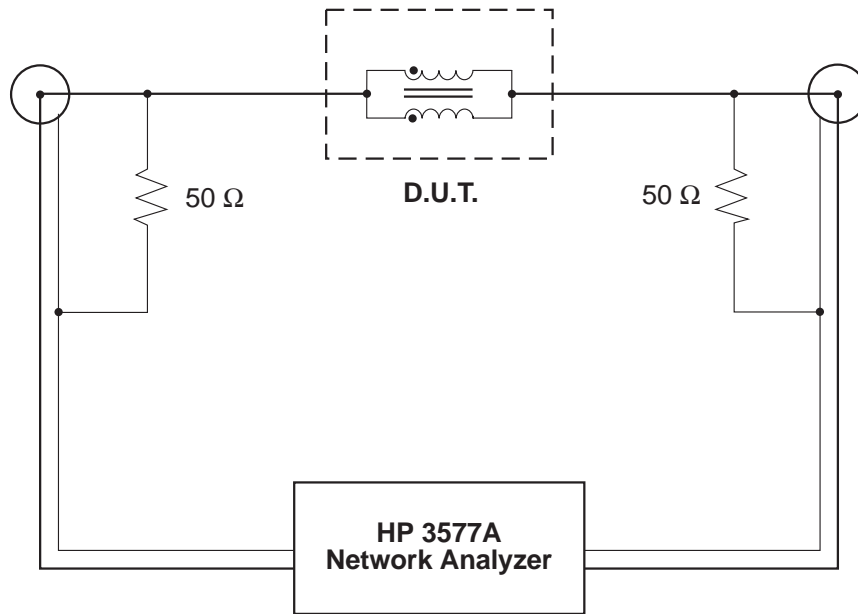

### Test Notes:

1. Network analyzer calibrated to compensate for 50  $\Omega$  resistors.
2. All windings on a core are connected in parallel for the test.
3. For multi-core chokes, test data is for one core only. The windings on the other core(s) are left unconnected (i.e. open).

### For More Information:

| Pulse Worldwide Headquarters                               | Pulse Europe                                       | Pulse China Headquarters   | Pulse North China  | Pulse South Asia  | Pulse North Asia  |
|--|--|--|--|---|---|
| 12220 World Trade Dr.<br>San Diego, CA 92128<br>U.S.A.     | Einsteinstrasse 1<br>D-71083 Herrenberg<br>Germany | B402, Shenzhen Academy of<br>Aerospace Technology Bldg.<br>10th Kejinan Rd.<br>High-Tech Zone<br>Nanshan District<br>Shenzhen, PR China 518057 | Room 1503<br>XinYin Building<br>No. 888 YiShan Rd.<br>Shanghai 200233<br>China | 135 Joo Seng Rd.<br>#03-02<br>PM Industrial Bldg.<br>Singapore 368363 | No. 26, Kao Ching Rd.<br>Yang Mei Chen<br>Taoyuan Hsien<br>Taiwan<br>R. O. C. |
| www.pulseeng.com<br>Tel: 858 674 8100<br>Fax: 858 674 8262 | Tel: 49 7032 7806 0<br>Fax: 49 7032 7806 135       | TEL: 86 755 33966678<br>FAX: 86 755 33966700   | Tel: 86 21 54643211/2<br>Fax: 86 21 54643210                                   | TEL: 65 6287 8998<br>FAX: 65 6280 0080                                | Tel: 886 3 4643715<br>Fax: 886 3 4641911                                      |

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.  
© Copyright, 2009. Pulse Engineering, Inc. All rights reserved.