


COAXICON Contacts (Continued)

Size 8 TWINAX/TRIAX/COAX Contacts

Size 8 Triax

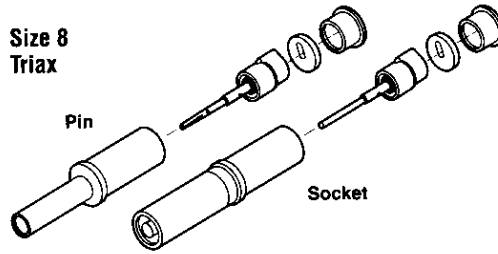


Size 8 Contact Extraction Tooling


| Contact Style | Tool Part Number |
|----------------------------|------------------|
| Rear Release/Rear Remove | 58284-1 |
| Front Release/Front Remove | 58284-1 |
| Front Release/Rear Remove | 448703-1 |

| Contact Size | Style | Cable | Contact Part No. | | Crimp Tooling | Crimp Tooling | |
|--------------|-------|---|-----------------------------|-----------|---|----------------------------|----------|
| | | | Pin | Socket | | Center Contact | Ferrule |
| 8 TWINAX | RR/RR | M17/176-00002 | — | 222191-4 | — | — | — |
| | RR/RR | Tensolite 24463/9P025X-2(LD) or 24463/9B017X-2 (LD) | — | 222191-5 | Hand Tool Frame M22520/5-01 (AMP 608650-1) Crimping Die AMP 58316-1 or Daniels Y793 or Y793A or AMP Hand Crimping Tool 91907-1* | — | — |
| | RR/RR | M17/176-00002 | 222190-4 (short engagement) | — | — | — | — |
| | RR/RR | Tensolite 24463/9P025X-2(LD) or 24463/9B017X-2 (LD) | 222190-3 (short engagement) | — | — | — | — |
| | RR/RR | Tensolite 24463/9P025X-2(LD) or 24463/9B017X-2(LD) | 448313-2 (long engagement) | — | — | — | — |
| | FR/RR | Tensolite 24463/9P025X-2(LD) or 24463/9B017X-2(LD) | 448312-2 (long engagement) | — | — | — | — |
| 8 TRIAX | FR/FR | Posted (.250 [6.35] min. post extension) | 448541-1 (long engagement) | — | — | — | — |
| 8 COAX | RR/RR | Adams Russell FC11Z | — | 448543-1 | — | M22520/2-01 (AMP 601966-1) | 91907-1* |
| | RR/RR | Adams Russell FC14Z | — | 448543-2 | — | M22520/2-01 (AMP 601966-1) | 91907-1* |
| | RR/RR | RG/U-316, 188 | 1218687-3 (long engagement) | 1218820-1 | — | M22520/2-01 (AMP 601966-1) | 91907-1* |
| | RR/RR | RG/U-142 | 1218689-1 (long engagement) | 1218821-1 | — | M22520/2-01 (AMP 601966-1) | 91907-1* |
| | FR/RR | Adams Russell FC11Z | 448542-1 (long engagement) | — | — | M22520/2-01 (AMP 601966-1) | 91907-1* |
| | FR/RR | Adams Russell FC14Z | 448542-2 (long engagement) | — | — | M22520/2-01 (AMP 601966-1) | 91907-1* |
| | FR/FR | Posted (.250 [6.35] min. post extension) | 448540-2 (long engagement) | — | — | — | — |

*SDE die used with hand tool frame 354940-1.

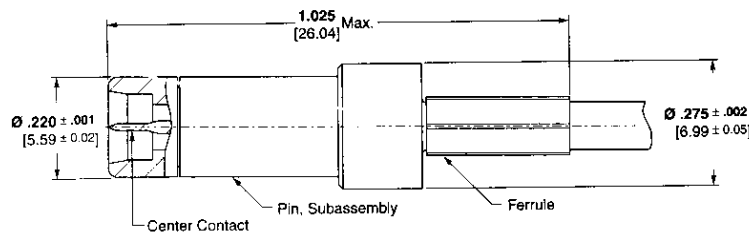

Pin

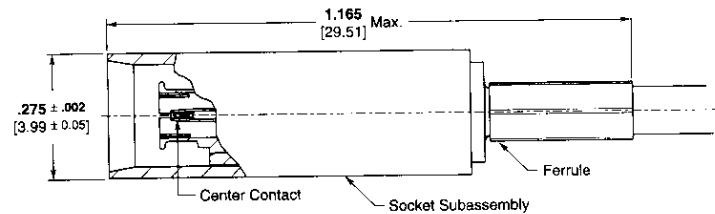

Socket

Size 5 COAX Contacts, Spring Loaded 75 Ohm

| Style | Cable | Contact Part No. | | Crimp Tooling | |
|--------------------------|----------|------------------|----------|--|--|
| | | Pin | Socket | Center Contact | Braid |
| Rear Release/Rear Remove | RG/U-179 | 443971-1 | 443972-1 | Daniels HMR Tool AFM8 or AMP 601966-1 with Daniels positioner K1289 (socket) or K1288S (pin) | Daniels HX4 with Die-set Y196 cavity A or AMP 35940-1 with with Die-set 58483-1 Cavity B |