

D-LAN-19"-12

Order No.: 2880150

The illustration shows the version with 24 ports



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2880150>

19" rack with 12 surge protected ports for data interfaces in Ethernet (100Base T), Token Ring and FDDI/CDDI networks in acc. with Class D/EN 50173 (CAT5e), connection on the protective device: RJ45 sockets

Commercial data

GTIN (EAN)	 4 017918 962807
Note	Made-to-order
sales group	J471
Pack	1 pcs.
Customs tariff	85363010
Catalog page information	Page 139 (TT-2009)

Product notes

WEEE/RoHS-compliant since:
06/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Housing material	Sheet steel
Color	beige

Standards for air and creepage distances	DIN VDE 0110-1
	IEC 60664-1: 1992-10
Surge voltage category	II
Pollution degree	2
Total surge current (8/20) μ s	10 kA
Ambient temperature (operation)	-40 °C ... 80 °C
Mounting type	19" rack
Design	19" rack patch module
Number of positions	12
Degree of protection	IP20
Direction of action	Line-Line & Line-Signal Ground/Shield & Signal Ground/Shield-Earth Ground
Width	483.00 mm
Height unit	1 HU
Protective circuit	
IEC category	C1
	C2
	C3
	B3
Maximum continuous voltage U_C (wire-wire)	6 V DC
Maximum continuous voltage U_C (wire-ground)	68 V DC (optional: +/- 6 V DC)
Nominal current I_N	1.5 A (25°C)
Operating effective current I_C at U_C	≤ 1 mA
Ground conductor current I_{PE}	≤ 1 mA (jumper 2 unplugged)
Nominal discharge surge current I_n (8/20) μ s (Core-Core)	350 A
Nominal discharge surge current I_n (8/20) μ s (Core-Earth)	350 A
Nominal discharge surge current I_n (8/20) μ s (Shield-Earth)	2.5 kA (with insulated housing)
Total surge current (8/20) μ s	10 kA
Nominal pulse current I_{an} (10/1000) μ s (Core-Core)	100 A
Nominal pulse current I_{an} (10/1000) μ s (Core-Earth)	100 A
Output voltage limitation at 1 kV/ μ s (Core-Core) static	≤ 20 V

Output voltage limitation at 1 kV/ μ s (Core-Earth) static	≤ 30 V (J2 plugged)
	≤ 170 V (J2 unplugged)
Output voltage limitation at 1 kV/ μ s (Shield-Earth) static	≤ 700 V (with insulated shield)
Residual voltage at I_n , (conductor-conductor)	≤ 65 V
Residual voltage at I_n , (conductor-ground)	≤ 45 V (J2 ON)
	≤ 220 V (J2 OFF)
Residual voltage at I_n , (shield-ground)	≤ 700 V
Protection level U_p (Core-Core)	≤ 50 V (C1, 500 V/250 A)
Protection level U_p (Core-Earth)	≤ 40 V (C1, 500 V/250 A (J2 ON))
	≤ 180 V (C1, 500 V/250 A (J2 OFF))
Protection level U_p (Shield-Earth)	≤ 800 V (with insulated housing)
Response time t_A (Core-Core)	≤ 1 ns
Response time t_A (Core-Earth)	≤ 1 ns
Response time t_A (Core-GND)	≤ 100 ns
Input attenuation a_E , sym.	Typ. 1 dB (≤ 100 MHz)
Near-end crosstalk attenuation	Typ. 36 dB (100 Ω system / 100 MHz)
Cut-off frequency f_g (3 dB), sym. in 100 Ohm system	> 100 MHz
Capacity (Core-Core)	Typ. 20 pF
Capacity (Core-Earth)	Typ. 1 pF
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C1 (500 V / 250 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C1 (500 A/250 A)
Surge carrying capacity in acc. with IEC 61643-21 (Shield-Earth)	C2 (4 kV / 2 kA)

Connection data

Connection method	RJ45
Connection type IN	RJ45 female connector
Connection type OUT	RJ45 female connector
Connection method	Network interfaces (e.g. Ethernet, Token Ring and CDDI/FDDI)

Connection, protective circuit

Standards/regulations	IEC 61643-21
	DIN EN 50173-1

Certificates / Approvals




Certification


GOST

Diagrams/Drawings

Dimensioned drawing

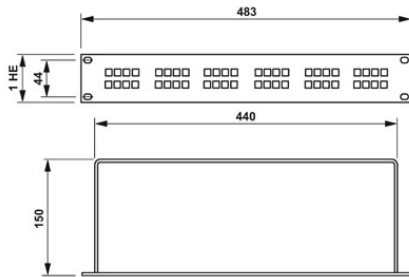

Circuit diagram

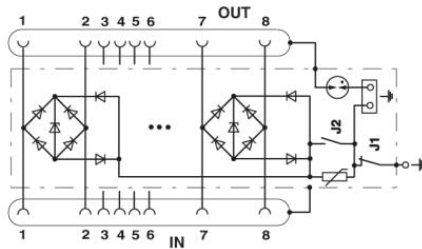

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;