


## UM 45-FLK50

Order No.: 2962612

The illustration shows a 34-pos. version



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2962612>

VARIOFACE module, with screw connection and flat-ribbon cable connector, for assembly on NS 35/7.5, 50 positions

Commercial data	
GTIN (EAN)	4017918087289
sales group	I001
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.1563 KG
Catalog page information	Page 244 (IF-2007)

### Product notes

WEEE/RoHS-compliant since:  
08/11/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

General data	
Nominal voltage $U_N$	25 V AC
	60 V DC
Max. current carrying capacity per branch	1 A
Number of positions	50
Width	151 mm

Height	50 mm
Depth	45 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage contact/contact	500 V AC
Mounting position	Any
Standards/regulations	IEC 60664 DIN VDE 0110
Pollution degree	2
Surge voltage category	II

#### Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.14 mm <sup>2</sup>
Conductor cross section solid max.	1.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.14 mm <sup>2</sup>
Conductor cross section stranded max.	1.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	16
Stripping length	6 mm
Screw thread	M3
Connection 2	Flat-ribbon cable connection
Number of connections	1
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	50

#### Certificates / Approvals



Certification CUL, GOST, UL

#### CUL

Nominal voltage U <sub>N</sub>	125 V
--------------------------------	-------

Nominal current $I_N$	1 A
<b>UL</b>	
Nominal voltage $U_N$	125 V
Nominal current $I_N$	1 A


### Accessories

Item	Designation	Description
<b>Cable/conductor</b>		
2289065	FLK 50/EZ-DR/ 50/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 0.5 m
2299097	FLK 50/EZ-DR/ 50/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 0.5 m
2289078	FLK 50/EZ-DR/ 100/KONFEK	Round cable sets, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 1 m
2299107	FLK 50/EZ-DR/ 100/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 1 m
2289081	FLK 50/EZ-DR/ 150/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 1.5 m
2299110	FLK 50/EZ-DR/ 150/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 1.5 m
2289094	FLK 50/EZ-DR/ 200/KONFEK	Round cable sets, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 2 m
2299123	FLK 50/EZ-DR/ 200/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 2 m
2289104	FLK 50/EZ-DR/ 250/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 2.5 m
2289117	FLK 50/EZ-DR/ 300/KONFEK	Round cable sets, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 3 m
2299136	FLK 50/EZ-DR/ 300/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 3 m
2289120	FLK 50/EZ-DR/ 350/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 3.5 m
2289133	FLK 50/EZ-DR/ 400/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 4 m
2299149	FLK 50/EZ-DR/ 400/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 4 m
2289573	FLK 50/EZ-DR/ 450/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 4,5 m
2289586	FLK 50/EZ-DR/ 500/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 5 m

2289599	FLK 50/EZ-DR/ 550/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 5,5 m
2289609	FLK 50/EZ-DR/ 600/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 6 m
2299152	FLK 50/EZ-DR/ 600/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 6 m
2289612	FLK 50/EZ-DR/ 650/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 6.5 m
2289625	FLK 50/EZ-DR/ 700/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 7 m
2289638	FLK 50/EZ-DR/ 750/KONFEK	Round cable set, with two 50-pos. female connectors (1:1 connection), for connecting 32 channels, cable length: 7.5 m
2289641	FLK 50/EZ-DR/ 800/KONFEK	Round cable sets, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 8 m
2299165	FLK 50/EZ-DR/ 800/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 8 m
2289654	FLK 50/EZ-DR/ 850/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 8.5 m
2289667	FLK 50/EZ-DR/ 900/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 9 m
2289670	FLK 50/EZ-DR/ 950/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 9.5 m
2289683	FLK 50/EZ-DR/1000/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 10 m
2299178	FLK 50/EZ-DR/1000/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 10 m
2295046	FLK EZ-DR-S.../.../...	Round cable, with preassembly, shielded, variable cable length
2295059	FLK EZ-DR.../.../...	Round cable, with preassembly, not shielded, variable cable length

### Diagrams/Drawings

#### Circuit diagram

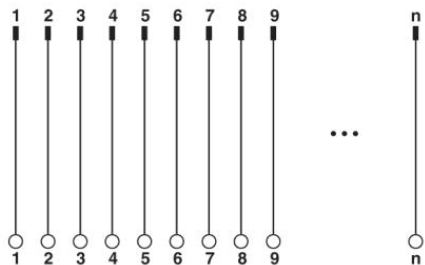

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;