

UM-EC26-R

This item is no longer available. Should you have any questions, please contact our Sales Team.

Order No.: 2956686

The illustration shows version UM-EC 26-L

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2956686>



VARIOFACE module, for ELCO plug connectors, for assembly on NS 35/7.5 or NS 32, with pin strip 8027 right, 26 positions

Commercial data

EAN	4017918085902
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.322 KG
Catalog page information	Page 234 (IF-2002)

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Nominal voltage U_N	250 V
Max. current carrying capacity per branch	2 A
Max. total current of all branches	26 A
Number of positions	26
Width	110 mm
Height	58.5 mm
Depth	111.5 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any

Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
	DIN VDE 0160 (in parts)

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	ELCO connection
Type of connection	Pluggable


Certificates / Approvals

Certification

GOST

Drawings

Dimensioned drawing

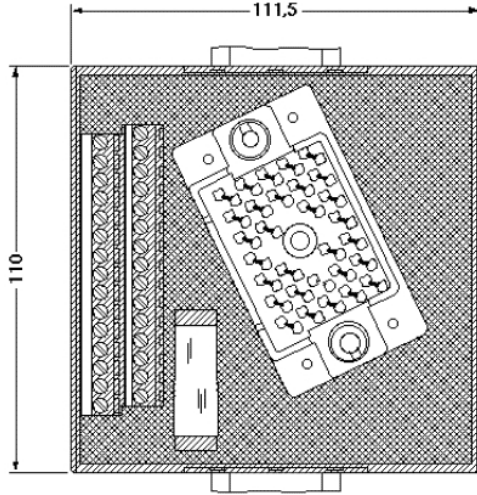

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2009 Phoenix Contact
Technical modifications reserved;