


UMK- F32F-VS

This item is no longer available. Should you have any questions, please contact our Sales Team.

Order No.: 2970617

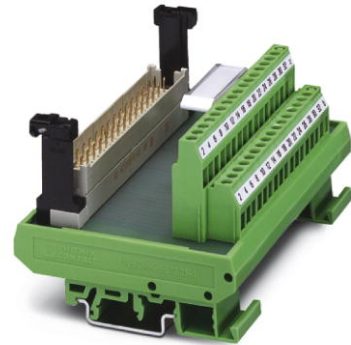

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2970617>

VARIOFACE module, for IEC 603/DIN 41612 plug connector, type F, 32-pos., z, b components mounted, with socket strip, cable housing with screw interlock

Commercial data

EAN	4017918087807
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.29231 KG
Catalog page information	Page 223 (IF-2005)

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Nominal voltage U_N	250 V AC
Max. current carrying capacity per branch	4 A
Number of positions	32
Width	123.8 mm
Height	62.5 mm
Depth	77 mm
Ambient temperature (operation)	-25 °C ... 50 °C
Mounting position	Any

Standards/regulations	IEC 60664
	IEC 60664
	DIN VDE 0110
	DIN VDE 0160 (in parts)

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	IEC 603/DIN 41612 connection
Type of connection	Pluggable

Certificates / Approvals



Certification

GOST

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2009 Phoenix Contact
Technical modifications reserved;