


Electrical





SCHEMATIC


ELECTRICAL SPECIFICATIONS @ 25°C

URNS RATIO-POLARITY	:	2-7 : 6-3 : 5-4 = 1 : 0.75 : 0.75 ±3%
INDUCTANCE	:	0.1V 1KHz
L5-3 (6 AND 4 CONNECTED)	:	80mH TO 90mH @ 0Adc
L5-3 (6 AND 4 CONNECTED)	:	77mH @ 30mAdc
DC RESISTANCE	:	2-7 = 13.50Ω MAX
	:	5-4 = 7.50Ω MAX
	:	6-3 = 9.50Ω MAX
LEAKAGE INDUCTANCE	:	@ 0.01V @25KHz (PARALLEL MODE)
L 5-3 WITH 4, 6 CONNECTED	:	160μH MAX
(2, 7 SHORT)	:	
THD 1.0V @100Hz	:	-47.0 dB MIN @ 0.0DC BIAS
LONGITUDINAL BALANCE (MEASURED: ON BALANCED SIDE)	:	60dB MIN @ 160KHz WITH WANDEL GOLTERMANN SDZ-12 135Ω REF
DIELECTRIC WITHSTAND VOLTAGE	:	60Hz, 1 MIN.
2, 7 TO 3, 4, 5, 6	:	2000VRMS

Mechanical

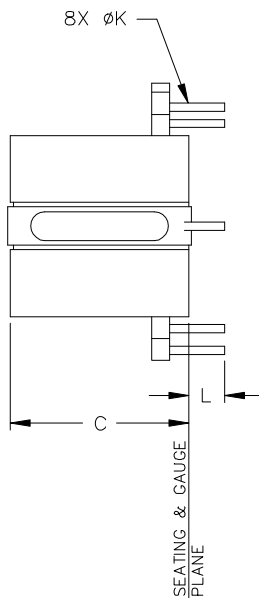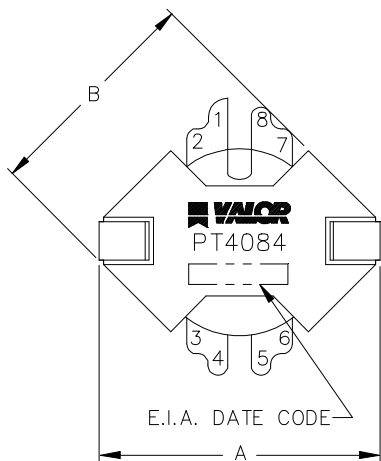

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	-	25.91	-	1.020
B	-	20.32	-	.800
C	-	17.15	-	.675
G	2.54 (TP)		.100 (TP)	
G ₁	2.54 (TP)		.100 (TP)	
øK	.56	.71	.022	.028
L	2.54	-	.100	-

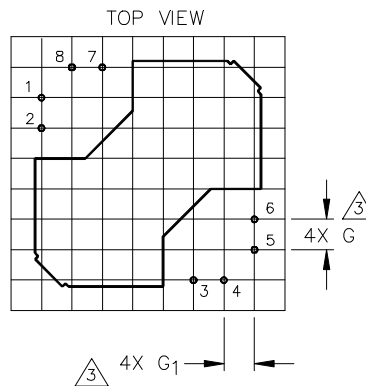

WEBSITE www.valorinc.com E-MAIL marketing@valorinc.com

NORTH AMERICA
tel 1-800-31 VALOR
fax 619-537-2525

ASIA/PACIFIC
tel +852-2953-1000
fax +852-2953-1333

EUROPE
tel +44-1727-824 875
fax +44-1727-824 898