


UM 45-FLK64

Order No.: 2962638

The illustration shows a 34-pos. version

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2962638>VARIOFACE module, with screw connection and flat-ribbon cable
connector, for assembly on NS 35/7.5, 64 positions

Commercial data	
GTIN (EAN)	4017918087302
sales group	I001
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.19 KG
Catalog page information	Page 244 (IF-2007)

Product notesWEEE/RoHS-compliant since:
03/30/2007

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**

Nominal voltage U_N	25 V AC
	60 V DC
Max. current carrying capacity per branch	1 A
Number of positions	64
Width	186 mm

Height	50 mm
Depth	45 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage input/output	500 V AC
Mounting position	Any
Standards/regulations	IEC 60664
	DIN VDE 0110
Pollution degree	2
Surge voltage category	II

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	16
Stripping length	6 mm
Screw thread	M3
Connection 2	Flat-ribbon cable connection
Type of connection	Pluggable

Certificates / Approvals

Certification

CUL, GOST, UL

CUL


Nominal voltage U_N	125 V
Nominal current I_N	1 A

UL

Nominal voltage U_N	125 V
Nominal current I_N	1 A

Diagrams/Drawings

Circuit diagram

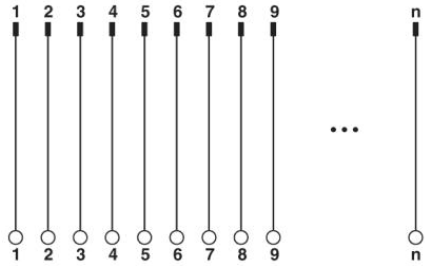

UM 45-FLK64 Order No.: 2962638

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2962638>

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;