
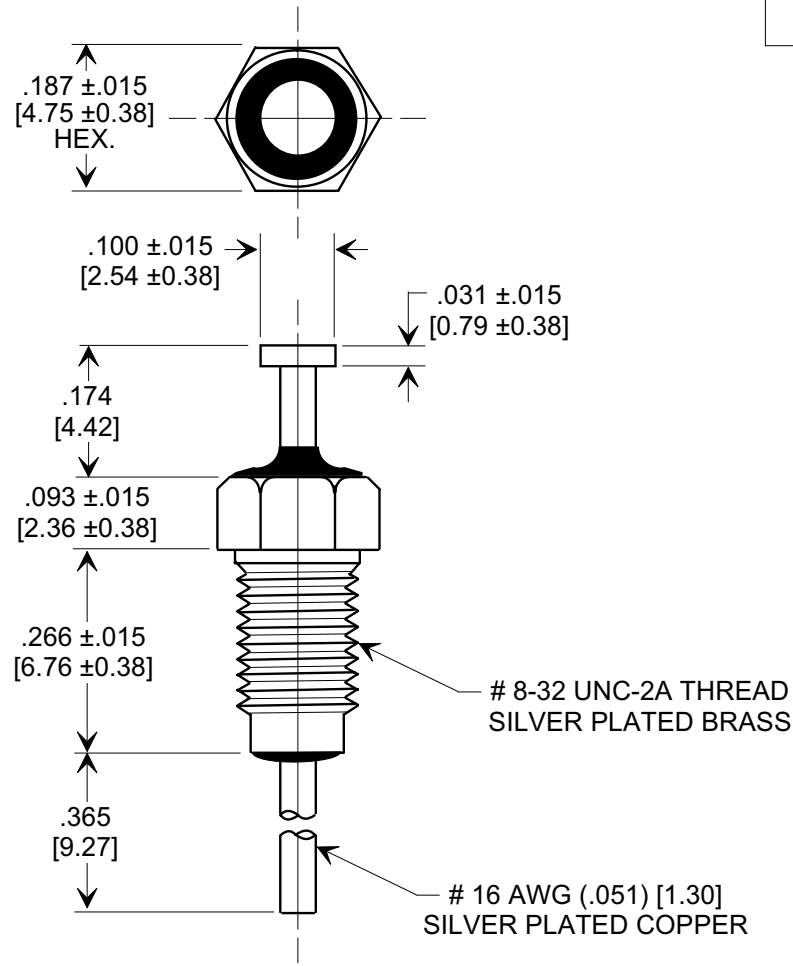


Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



NOTES:

- SUPPLIED WITH SILVER PLATED HEX NUT AND LOCK WASHER.
- MOUNTING TORQUE NOT TO EXCEED 5 lb-in.
- TUSONIX STANDARD PART NUMBER: 2425-018-X5U0-102P. TUSONIX RoHS COMPLIANT PART NUMBER: 2425-018-X5U0-102P LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- PART MARKING: STANDARD: BLACK INK FOR TRADEMARK AND CAP. CODE. RoHS PART: GREEN FOR TRADEMARK AND CAP. CODE.

SPECIFICATIONS

Capacitance Value:	1000 pF
Capacitance Tolerance:	+ 100 - 0 %
Temp. Characteristic:	X5U
Rating:	200 VDC @ +85°C/100 VDC @ +125°C
Operating Range:	-55°C TO +125°C
Current (A)	20
INSULATION RESISTANCE	10,000 m Ω (MIN.) @ +25°C
DWV @ 2 SEC. MIN.	600 VDC

REVISION RECORD	0	Original Release C.O. 20000711-3-01 TUSONIX PART NO. DELETED L.E. 12-12-01
	1	20011207-1-02 ADDED NOTES 3 & 4, IR, DWV & CURRENT, S.M. 11-01-05
	2	20051031-1-05

--TOLERANCES-- Unless Otherwise Specified
DECIMAL ± .031 [0.79]
ANGLES ±
TUSONIX TUCSON, ARIZONA

MINIATURE BUSHING FEED-THRU	
Drawn L.E. 07-12-00	
Approved H.R. 07-12-00	
A	2425-018-X5U0-102P