


MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

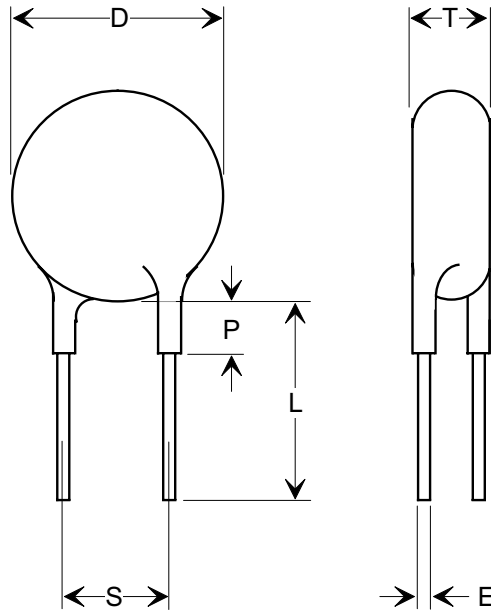

SPECIFICATIONS

TUSONIX PART NO.	818-000-X7W0-103M	
D (Diameter):	.593 MAX.	
T (Thickness):	.156 MAX.	
S (Lead Wire Spacing):	.375 ±.031	
L (Lead Wire Length):	1.5 MIN.	
E (Lead Wire Diameter):	.025 (22 AWG.)	
P (Coating on Leads Max.):	.125 MAX.	
Capacitance Value:	10,000 pF	
Capacitance Tolerance:	± 20 %	
Temperature Coefficient:	X7W	
Voltage:	Working:	1000 VDC
	Test:	1750 VDC
	Life:	1500 VDC
Marking:	TMK, CAP, TOL, TC & KV	

REVISION RECORD Original Release C.O. 19970925-4-01 0		--TOLERANCES-- Unless Otherwise Specified	Title DISC	
		DECIMAL ±	Drawn S.M. 09-25-97	
		ANGLES ±	Approved J.Mc. 09-25-97	
		TUSONIX TUCSON, ARIZONA	A	818-000-X7W0-103M