

Features

Regulated Converters

- 2:1 and 4:1 Wide Input Voltage Ranges
- 1kVDC, 2kVD or 3kVDC Isolation
- UL94V-0 Package Material
- Certified for Medical Applications
- Continuous Short Circuit Protection
- Low Noise
- No External Capacitor needed
- Efficiency to 83 %

Description

High-power-density, an industrial temperature range of -40°C to +85°C and extra features like Remote-On-Off control are just some of the characteristics of this converter, ideal for highly sophisticated industrial-designs. The RSO series is available with isolation of 2kV or 3kV by choosing option "/H2" or "/H3" in which case it is also ideal for medical applications which additionally require EN-60601-1 certification. The "Z" version features 4:1 input voltage range, while the standard version offers 2:1 input voltage range and includes a low voltage input range down to 4.5V.

Selection Guide

Part Number	Input Voltage Range (VDC)	Rated Output Voltage (VDC)	Output Current (mA)	Efficiency typ. (%)	Max Capacitive Load ⁽¹⁾
SIP8					
	RSO-xx3.3S (H2/H3)	4.5-9, 9-18 18-36, 36-72	3.3	300	68-72 70
RSO-xx05S (H2/H3)	4.5-9, 9-18 18-36, 36-72	5	200	73-75 75-78	1200µF
	RSO-xx09S (H2/H3)	4.5-9, 9-18 18-36, 36-72	9	111	74-78 78-81
RSO-xx12S (H2/H3)	4.5-9, 9-18 18-36, 36-72	12	83	75-80 80-83	680µF
	RSO-xx15S (H2/H3)	4.5-9, 9-18 18-36, 36-72	15	67	75-80 80-83
RSO-xx3.3D (H2/H3)	4.5-9, 9-18 18-36, 36-72	±3.3	±150	68-72 70	±1500µF
	RSO-xx05D (H2/H3)	4.5-9, 9-18 18-36, 36-72	±5	±100	73-75 75-76
RSO-xx09D (H2/H3)	4.5-9, 9-18 18-36, 36-72	±9	±56	74-78 78	±470µF
	RSO-xx12D (H2/H3)	4.5-9, 9-18 18-36, 36-72	±12	±42	75-79 79-80
RSO-xx15D (H2/H3)	4.5-9, 9-18 18-36, 36-72	±15	±34	75-79 79-80	±330µF
	RSO-xx3.3SZ (H2/H3)	9-36 18-72	3.3	300	70 70
RSO-xx05SZ (H2/H3)	9-36 18-72	5	200	78 75	1200µF
	RSO-xx09SZ (H2/H3)	9-36 18-72	9	111	81 78
RSO-xx12SZ (H2/H3)	9-36 18-72	12	83	83 80	680µF
	RSO-xx15SZ (H2/H3)	9-36 18-72	15	67	83 80
RSO-xx3.3DZ (H2/H3)	9-36 18-72	±3.3	±150	74 70	±1500µF
	RSO-xx05DZ (H2/H3)	9-36 18-72	±5	±100	77 75
RSO-xx09DZ (H2/H3)	9-36 18-72	±9	±56	78 78	±470µF
	RSO-xx12DZ (H2/H3)	9-36 18-72	±12	±42	80 80
RSO-xx15DZ (H2/H3)	9-36 18-72	±15	±34	80 80	±330µF

No suffix is standard isolation (1kVDC) e.g, RSO-0505S

*add suffix /H2 or /H3 for 2kVDC or 3kVDC isolation, e.g, RSO-0505S/H2, RSO-0505DZ/H3

ECONOLINE

DC/DC-Converter

with 3 year Warranty



1 Watt SIP8 Isolated Single & Dual Output



EN-60950-1 Certified
EN-60601-1 Certified
(Suffix H3)



2:1 Input
(RSO-S/D)
xx = 4.5-9Vin = 05
xx = 9-18Vin = 12
xx = 18-36Vin = 24
xx = 36-72Vin = 48



4:1 Input
(RSO-SZ/DZ)
xx = 9-36Vin = 24
xx = 18-72Vin = 48

Refer to Application Notes

Specifications (Core Operating Area) measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up time unless otherwise specified

Input Voltage Range			2:1 and 4:1
Output Voltage Accuracy			$\pm 2\%$ typ.
Line Voltage Regulation	2:1		$\pm 0.2\%$ max.
	4:1		$\pm 0.5\%$ max.
Load Voltage Regulation	2:1		$\pm 0.4\%$ max.
(10% to 100% full load)	4:1		$\pm 0.5\%$ typ.
Minimum Load			0%
Output Ripple and Noise (20MHz limited)			50mVp-p max.
Operating Frequency	2:1	200kHz min. / 500kHz max.	
	4:1	100kHz min. / 300kHz max.	
Efficiency at Full Load			See Selection Guide
Quiescent Current	RS-05xxS_D		40mA typ.
Nominal input Voltage	RS-12xxS_D		32mA typ.
(Standard, /H2 and /H3)	RS-24xxS_D, SZ_DZ		25mA typ.
	RS-48xxS_D, SZ_DZ		15mA typ.
CTRL Pin drive current /see Notes)			3mA typ, 6mA max.
Quiescent Input Current when Converter is OFF			10mA max.
Isolation Voltage	Standard	(tested for 1 second)	1000VDC
		(rated for 1 minute)	500VAC / 60Hz
	/H2 Version	(tested for 1 second)	2000VDC
		(rated for 1 minute)	1000VAC / 60Hz
	/H3 Version	(tested for 1 second)	3000VDC
		(rated for 1 minute)	1500VAC / 60Hz
Isolation Capacitance	Standard	2:1 Single	10pF min. / 40pF typ. / 60pF max.
Isolation Capacitance	/H2 and /H3	2:1 Single	5pF min. / 30pF typ. / 60pF max.
Isolation Capacitance	Standard	2:1 Dual	120pF min. / 170pF typ. / 250pF max.
Isolation Capacitance	/H2 and /H3	2:1 Dual	5pF min. / 30pF typ. / 60pF max.
Isolation Capacitance	Standard	4:1 Single/Dual	200pF max.
Isolation Capacitance	/H2 and /H3	4:1 Single/Dual	30pF max.
Isolation Resistance			$>1\text{G}\Omega$ min.
Short Circuit Protection			Continuous
Operating Temperature Range (free air convection)			-40°C to $+85^\circ\text{C}$ (see Graph)
Storage Temperature Range			-55°C to $+125^\circ\text{C}$
Relative Humidity			95% RH
Package Weight			4.7g
Packing Quantity			22 pcs per Tube
MTBF ($+25^\circ\text{C}$)	} Detailed Information see Application Notes chapter "MTBF"	using MIL-HDBK 217F	1685×10^3 hours
($+85^\circ\text{C}$)		using MIL-HDBK 217F	254×10^3 hours


Derating-Graph (Ambient Temperature)

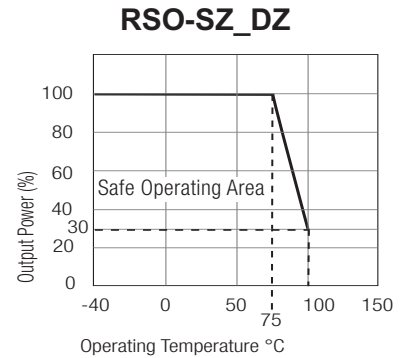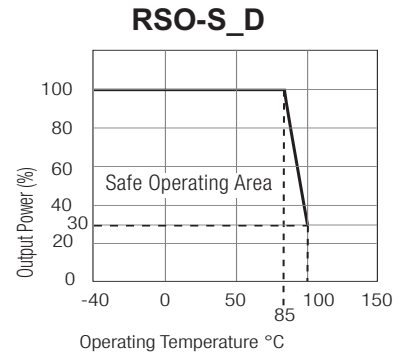


RSO

Typical Characteristics

RSO-24xxS


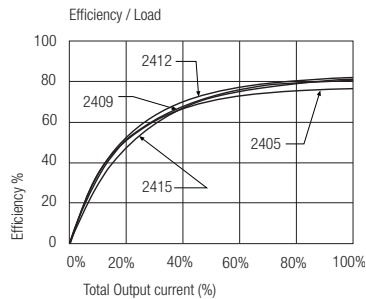


RSO-all types

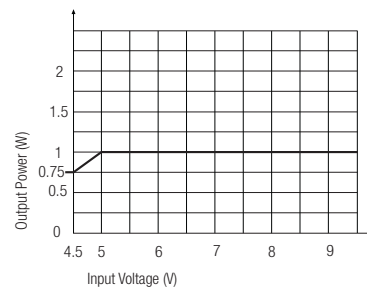

Package Style and Pinning (mm)

8 PIN SIP Package

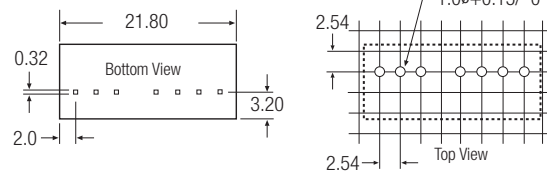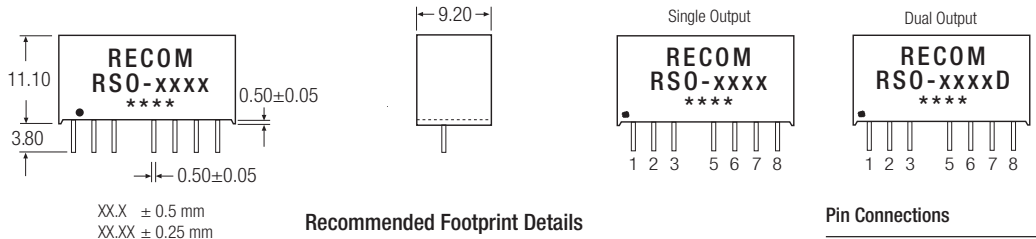

Recommended Footprint Details

Pin Connections

Pin #	Single	Dual
1	-Vin	-Vin
2	+Vin	+Vin
3	CTRL	CTRL
5	NC	NC
6	+Vout	+Vout
7	-Vout	Com
8	NC*	-Vout

NC = No Connection
NC* = NC, but no external Connection allowed.

Notes

Note 1 Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter

Certifications

EN General Safety	Report: PS-R7219C1	EN60950-1:2001 + A11:2004	EN Medical Safety	Report: PS071001601
EN60601-1:1990 + A11:1996				

Pin 8 (NC*) This pin is used internally and must have no external connection.

Pin 5 (NC) Not connected internally.

Pin 3 (CTRL)

This pin provides an Off function which puts the converter into a low power mode. When the pin is 'high' the converter is OFF and when the pin is high 'Z' the converter is ON. There is no allowed low state for this pin.

RSO


Application Examples

TTL Remote CTRL Circuit

Control Pin Input Current: 10mA

Voltage Set Point Accuracy with external input/output capacitors refer to recommended test circuit: typ. ± 1% max. ±2%

Control Pin (CTRL) Input Current, control voltage applied via 1K resistor, output voltage must reduce to 0V: typ. 3mA max. 6mA

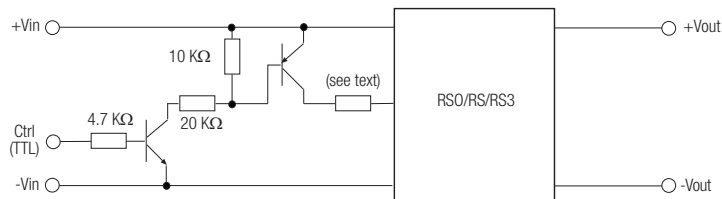

Voltage to be applied via a limiting resistor with a recommended value of 1K for RSO-05xx; 3.3K for RSO-12xx; RSO-24xx and 10K for RSO-48xx.

Isolated Remote CTRL Circuit

