


FO-55111-A

HONEYWELL
PART NUMBER
4SX19-T
PRODUCT CODE
VDF0876

REV	DOCUMENT	CHANGED BY	CHECK
6	0038447	SS 28MAR08	BLR

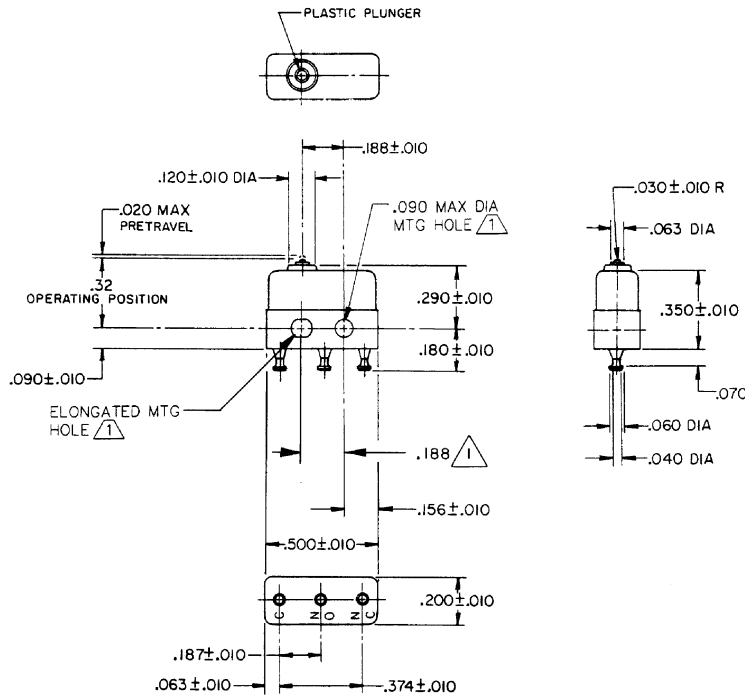

- NOTES**
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 SWITCH WILL WITHSTAND TEMPERATURE OF 400°F

RELEASE NO. PR-6196
REPLACES

CHARACTERISTICS
OPERATING FORCE - - - - 5 OZ MAX
RELEASE FORCE - - - - 1 OZ MIN
DIFFERENTIAL TRAVEL - - - .002 MAX
OVERTRAVEL - - - - - .004 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
28 VOLTS DC RATING	
SEA LEVEL	50,000 FT
INDUCTIVE	4 AMP 2.5 AMP
RESISTIVE	7 AMP 7 AMP
MAXIMUM INRUSH 24 AMP	
KEMA CE	7A 250V ~ T125 5E4
UL CSA	7A 250 VAC

DESIGN UNITS: INCH	
TOLERANCES UNLESS NOTED:	
NO PLACE	.X ±
ONE PLACE	.XX ±
TWO PLACE	.XXX ±
THREE PLACE	.XXXX ±
FOUR PLACE	.XXXXX ±
ANGLES	±
THIRD ANGLE PROJECTION	

DRAWN	SPK	06FEB08
CHECK	RJ	06FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	4SX19-T	6
SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1

4

3

2

1