



* Pb Free Part



MSL1

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G6KC-1G9600-Y4YY	Version 2.0dd	

Table 1.Electrical specifications(Filter 1)

Pass Band (1930-1990MHz)						
Item	Condition (MHz)	Specification			Unit	Remarks
		Min.	Typ.	Max.		
Insertion Loss	1930-1990	-	1.6	2.3	dB ^(*1)	
Ripple	1930-1990	-	0.4	1.3	dB	
Input VSWR	1930-1990	-	1.6	2.0	-	
Output VSWR	1930-1990	-	1.5	2.0	-	
Absolute attenuation	DC-1850	30	37	-	dB	
	1850-1910	11	13	-	dB	
	2010-2070	9	13	-	dB	
	2070-2150	18	22	-	dB	
	2150-3000	25	34	-	dB	
	3000-6000	30	38	-	dB	
Amplitude balance (S ₂₁ /S ₃₁)	1930-1990	-2.0	-1.1/+0.6	+2.0	dB	
Phase balance (∠S ₂₁ -∠S ₃₁)+180)	1930-1990	-10	-0/+5	+10	deg	
Input impedance (Unbalanced)		50			Ohm	
Output impedance (Balanced)		150//18nH			Ohm	
Operating temperature		-30 to +85			°C	

(*1) Specification of insertion loss includes loss that comes from the test board.



* Pb Free Part



MSL1

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G6KC-1G9600-Y4YY	Version 2.0dd	

Table 2.Electrical specifications(Filter 2)

Pass Band (1805-1880MHz)						
Item	Condition (MHz)	Specification			Unit	Remarks
		Min.	Typ.	Max.		
Insertion Loss	1805-1880	-	1.6	2.3	dB(*1)	
Ripple	1805-1880	-	0.4	1.3	dB	
Input VSWR	1805-1880	-	1.8	2.1	-	
Output VSWR	1805-1880	-	1.8	2.1	-	
Absolute attenuation	DC-1300	40	48	-	dB	
	1300-1705	30	42	-	dB	
	1705-1785	12	15	-	dB	
	1920-1980	17	20	-	dB	
	1980-3000	19	22	-	dB	
	3000-5000	35	43	-	dB	
	5000-6000	25	36	-	dB	
Amplitude balance ((S21/S31))	1805-1880	-1.0	-0.3/+0.3	+1.0	dB	
Phase balance ((Φ S21- Φ S31)+180)	1805-1880	-10	-5/+1	+10	deg	
Input impedance (Unbalanced)		50			Ohm	
Output impedance (Balanced)		150//15nH			Ohm	
Operating temperature		-30 to +85			°C	

(*1) Specification of insertion loss includes loss that comes from the test board.




MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G6KC-1G9600-Y4YY	Version 2.0dd	

Dimensions

Device size: 1.8typ. x 1.4typ. x 0.5max.

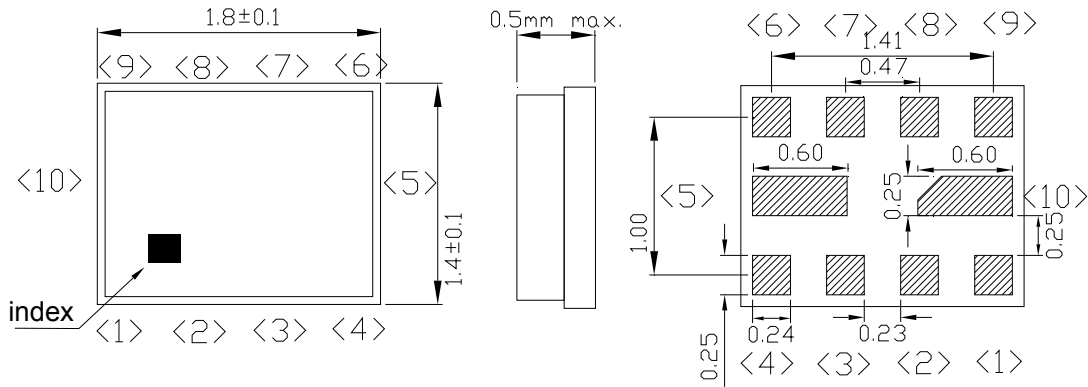



Unit : mm

Pin Configuration

Pin No.	Pin name	Description
1	IN	Filter1 input pin
2	GND	Ground
3	GND	Ground
4	IN	Filter2 input pin
5	GND	Ground
6	OUT	Filter2 balanced output pin
7	OUT	Filter2 balanced output pin
8	OUT	Filter1 balanced output pin
9	OUT	Filter1 balanced output pin
10	GND	Ground

Filter No.	Passband(MHz)	System
1	1930 ~ 1990	GSM1900-Rx
2	1805 ~ 1880	GSM1800-Rx

Evaluation Circuit

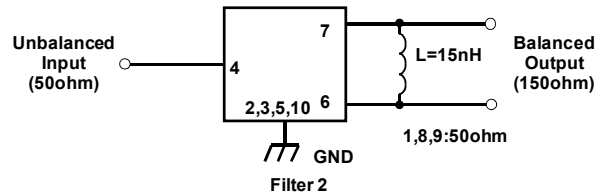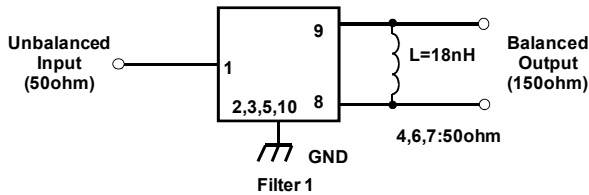

TAIYO YUDEN



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G6KC-1G9600-Y4YY	Version	2.0dd

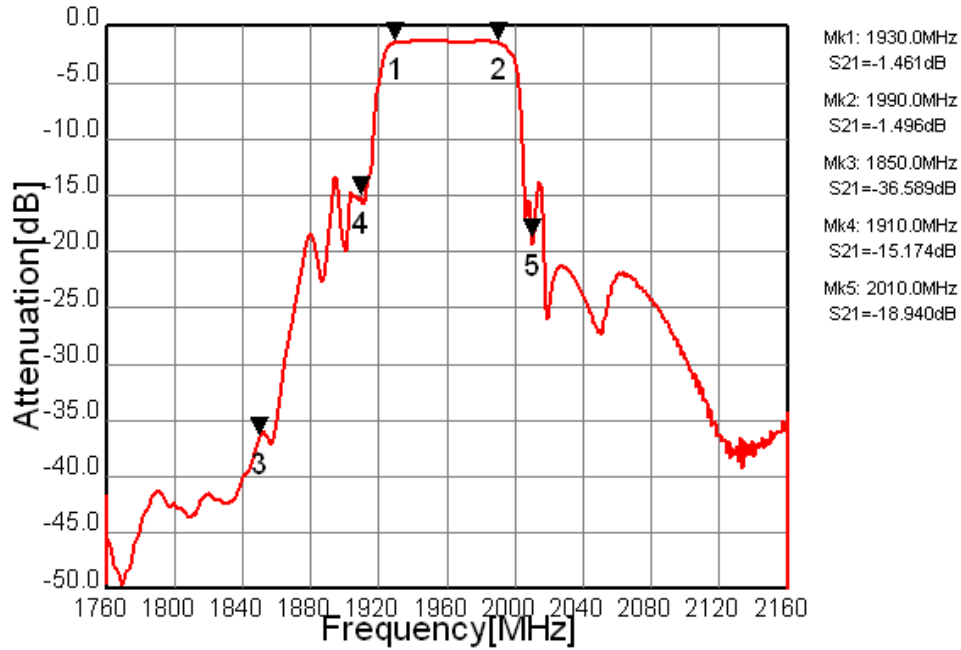


Fig.1 Pass-band Characteristic (Filter1)

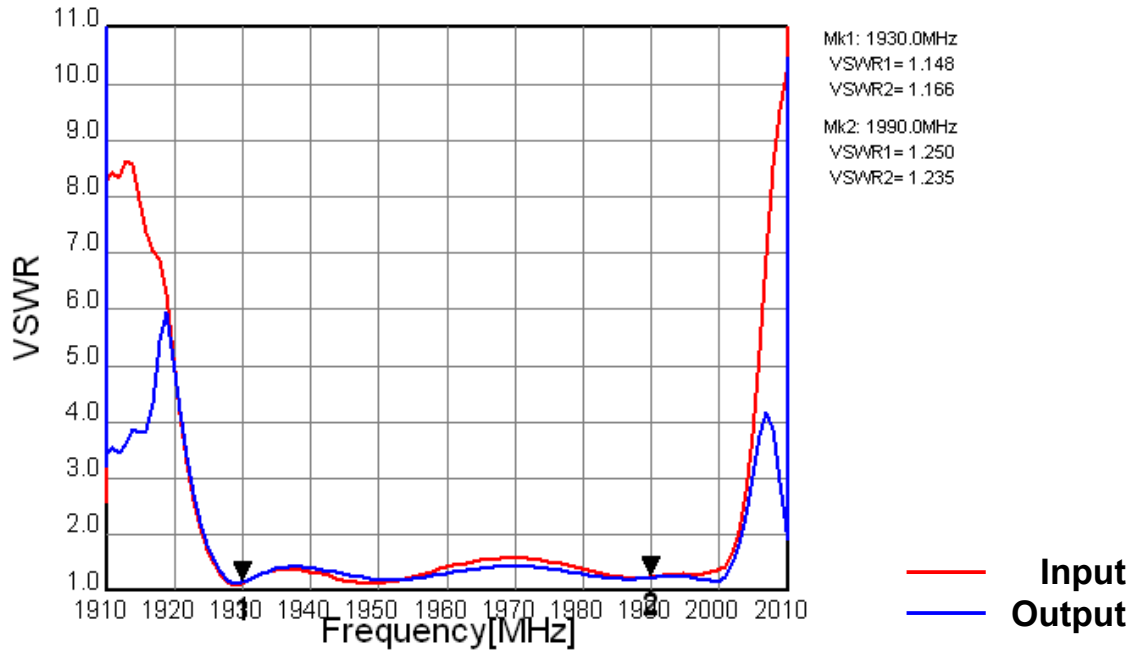


Fig.2 VSWR (Filter1)

TAIYO YUDEN



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G6KC-1G9600-Y4YY	Version 2.0dd	

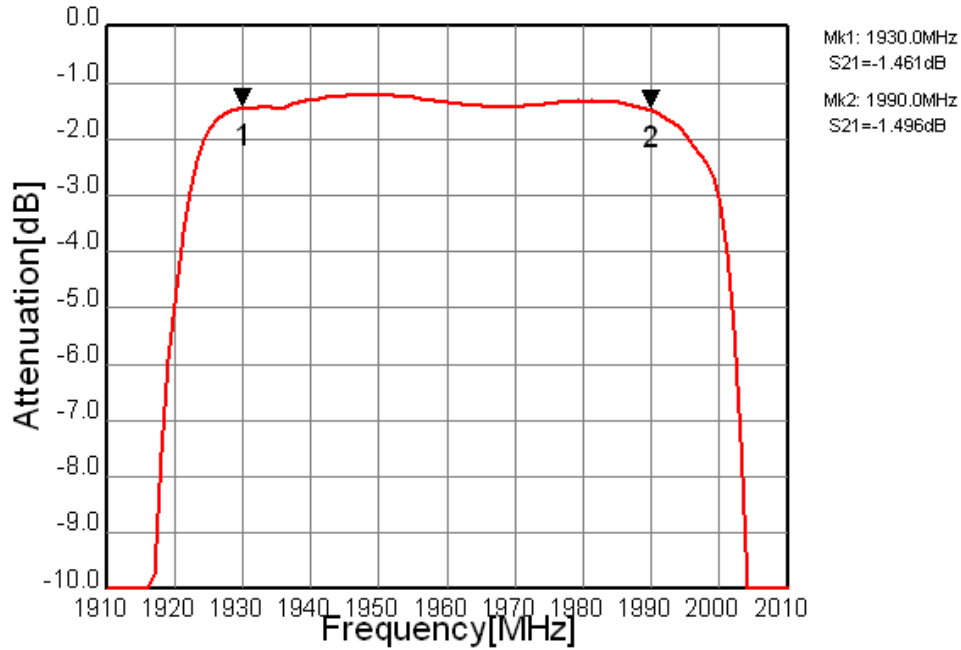


Fig.3 In-band Characteristic (Filter1)

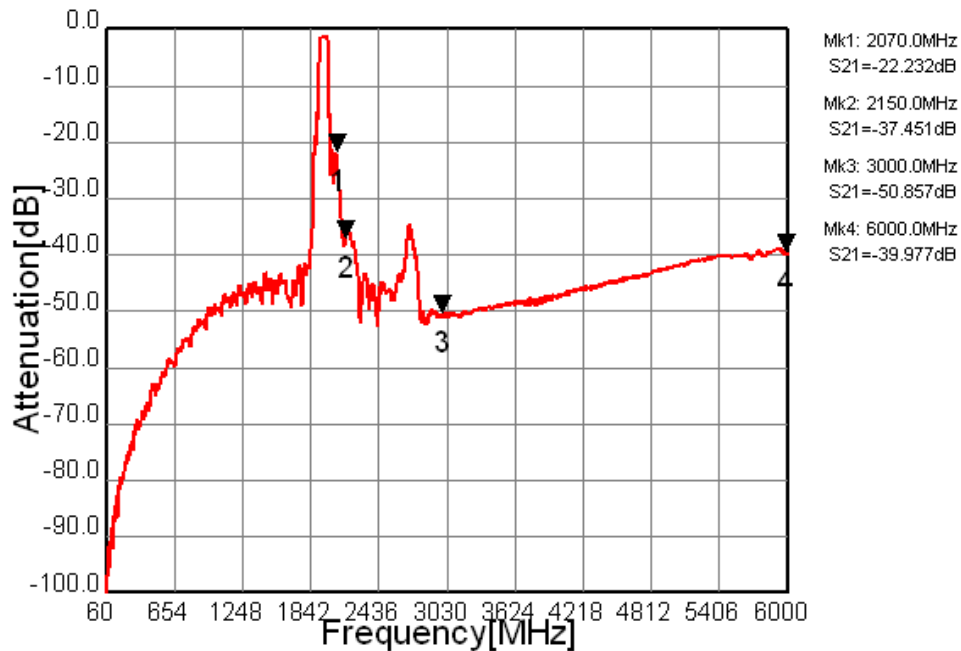


Fig.4 Wide-band Characteristic (Filter1)

TAIYO YUDEN



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G6KC-1G9600-Y4YY	Version 2.0dd	

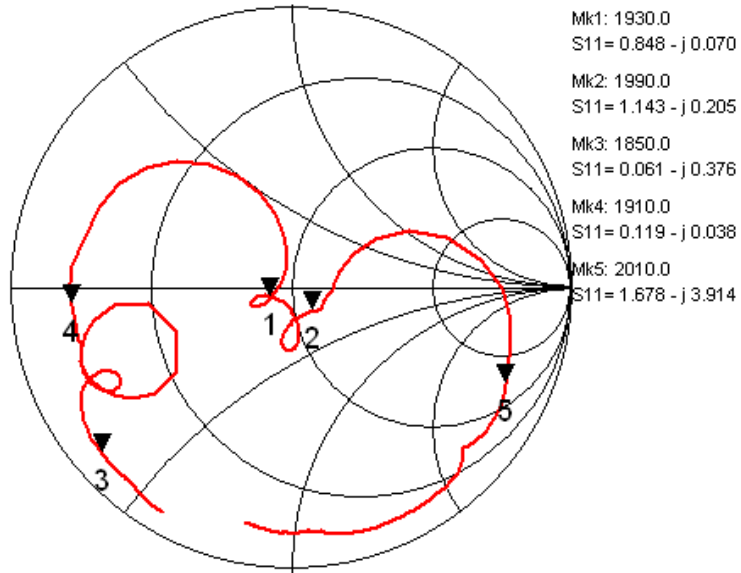


Fig.5 Impedance (S11) (Filter1)

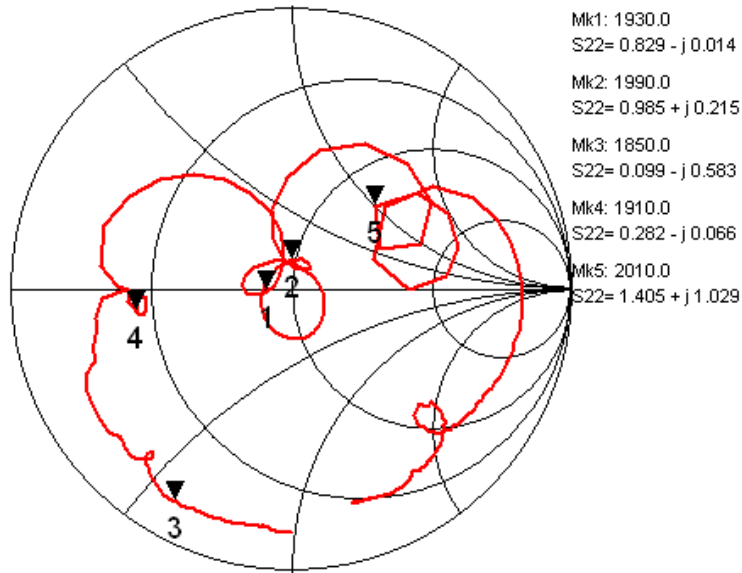


Fig.6 Impedance (S22) (Filter1)

TAIYO YUDEN



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G6KC-1G9600-Y4YY	Version	2.0dd

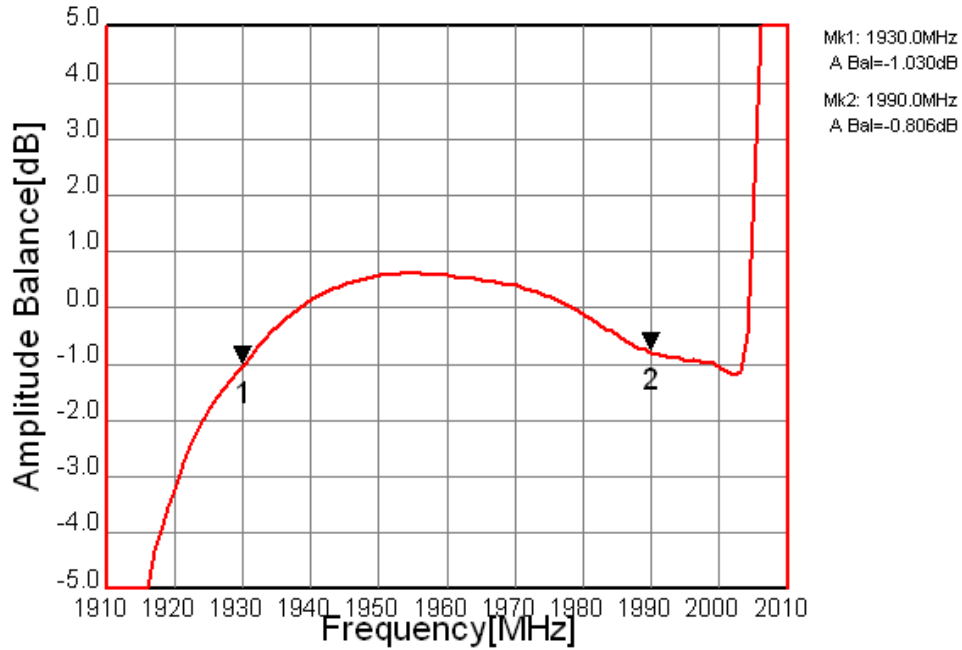


Fig.7 Amplitude Balance (Filter1)

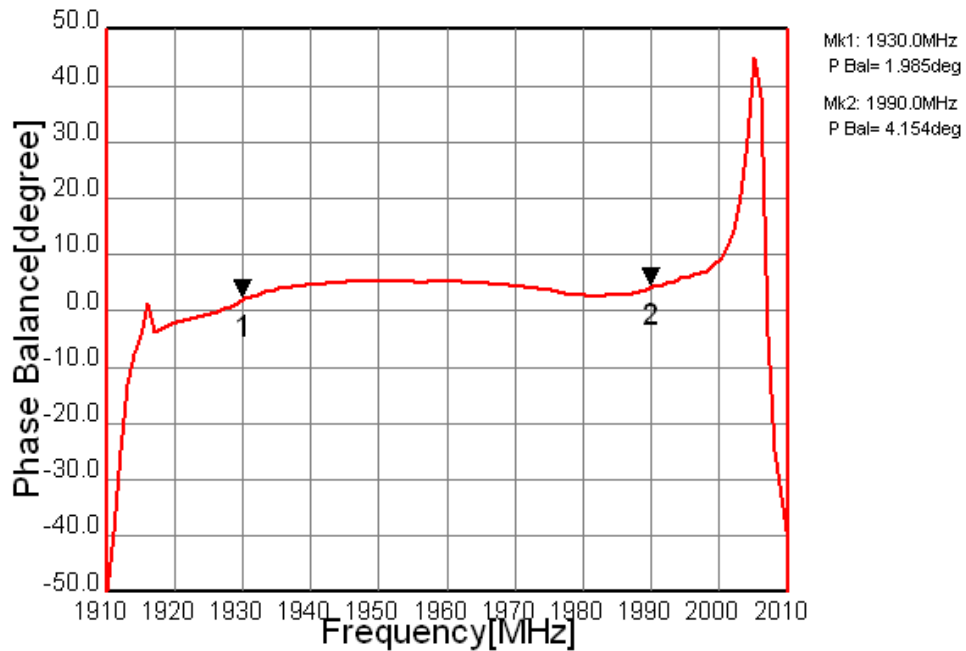


Fig.8 Phase Balance (Filter1)

TAIYO YUDEN



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G6KC-1G9600-Y4YY	Version 2.0dd	

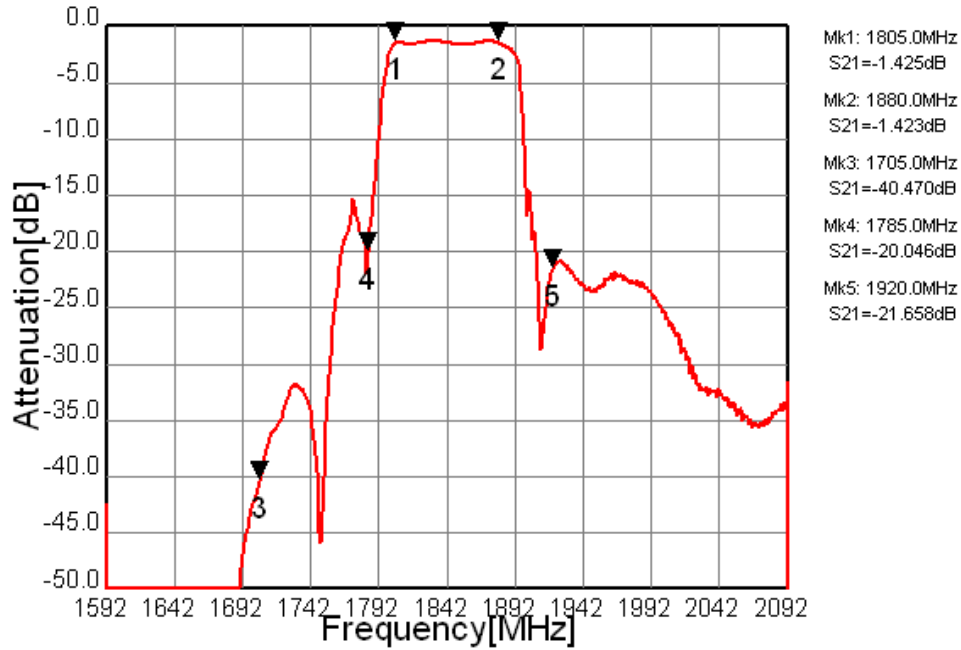


Fig.9 Pass-band Characteristic (Filter2)

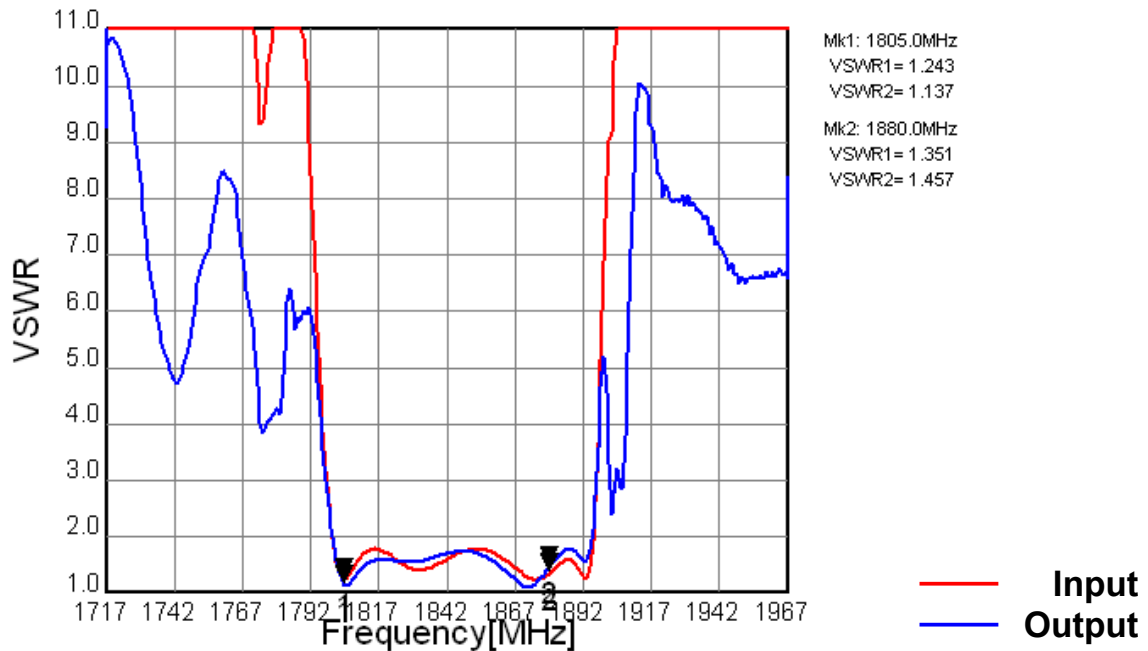


Fig.10 VSWR (Filter2)

TAIYO YUDEN



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G6KC-1G9600-Y4YY	Version 2.0dd	

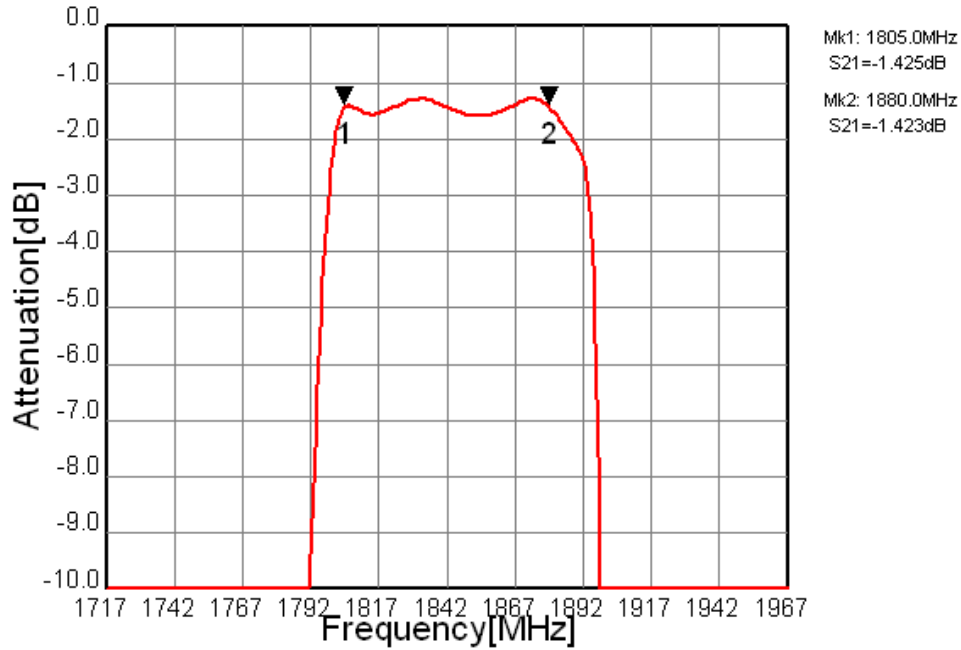


Fig.11 In-band Characteristic (Filter2)

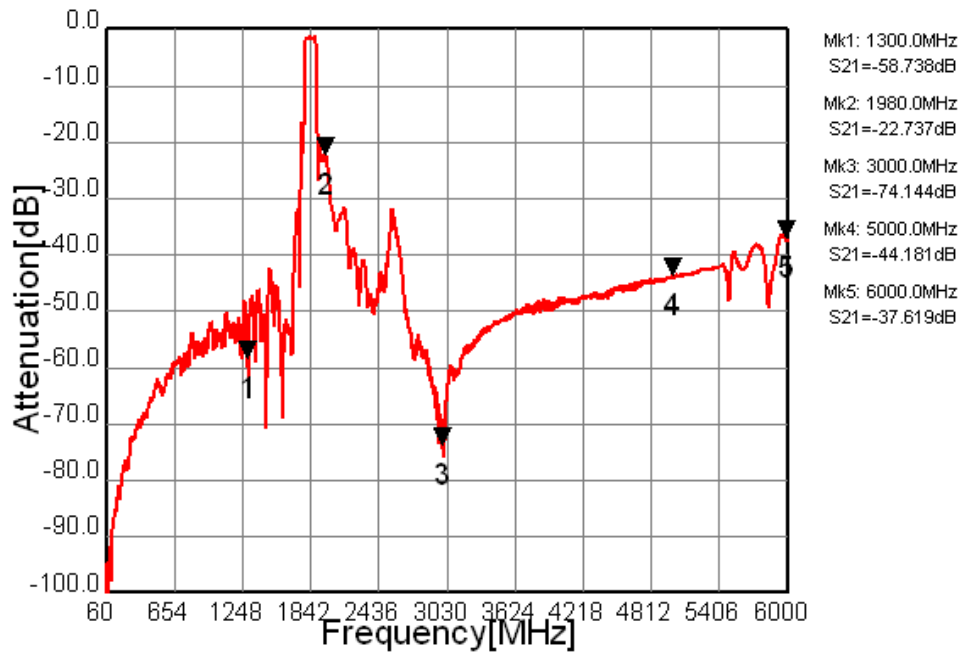


Fig.12 Wide-band Characteristic (Filter2)

TAIYO YUDEN



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G6KC-1G9600-Y4YY	Version 2.0dd	

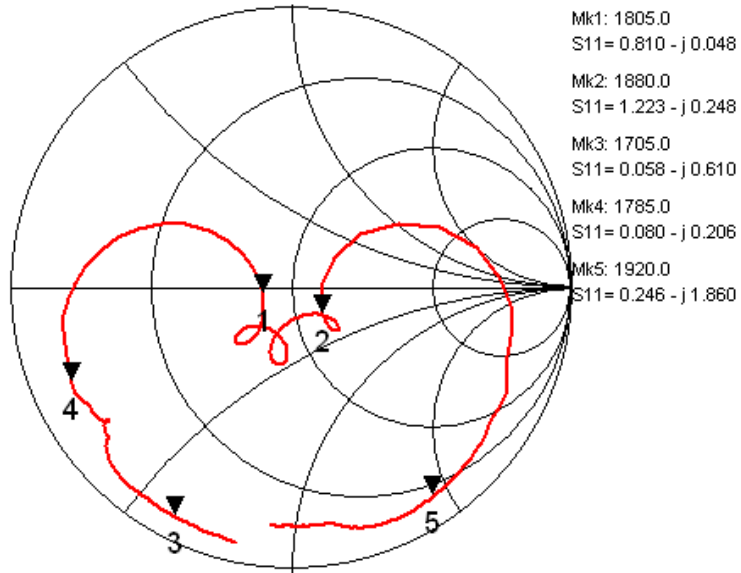


Fig.13 Impedance (S11) (Filter2)

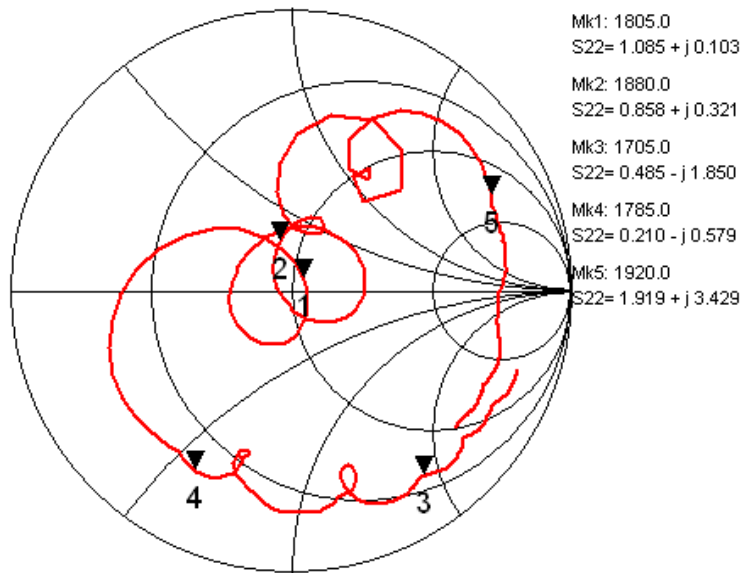


Fig.14 Impedance (S22) (Filter2)

TAIYO YUDEN



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G6KC-1G9600-Y4YY	Version 2.0dd	

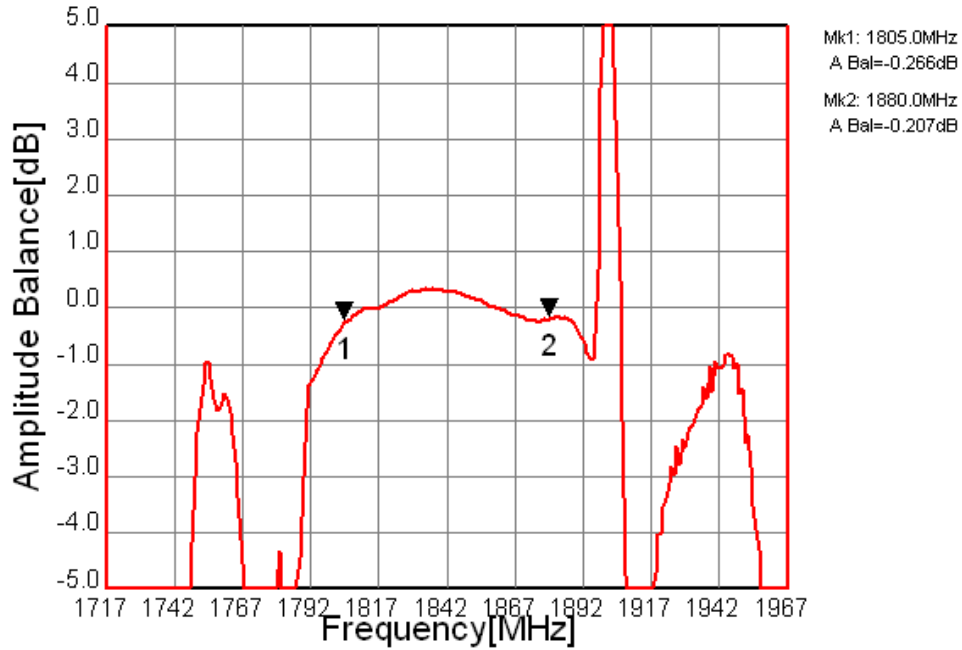


Fig.15 Amplitude Balance (Filter2)

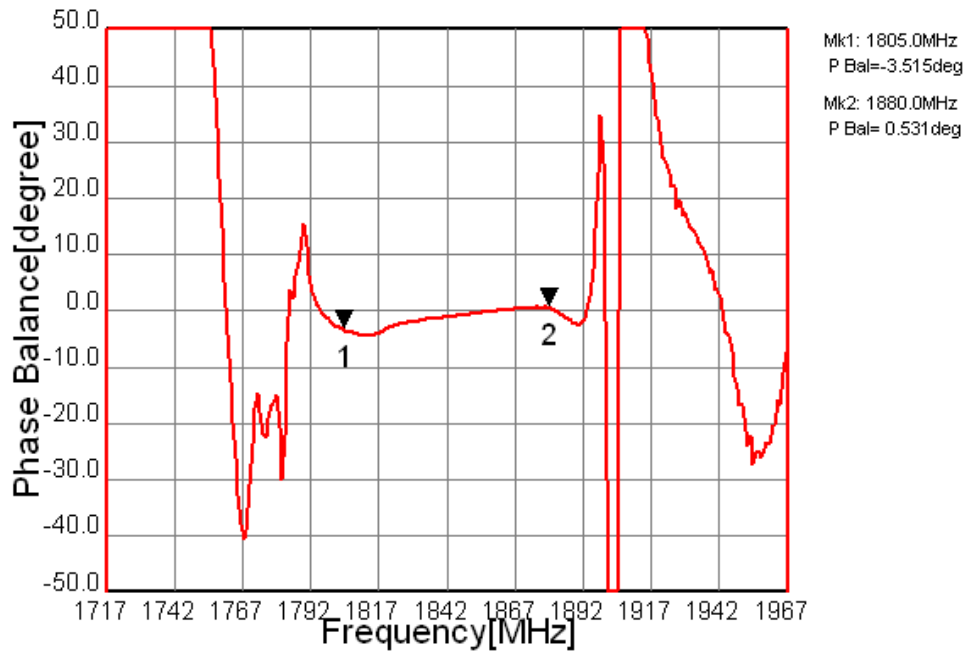


Fig.16 Phase Balance (Filter2)

TAIYO YUDEN