



* Pb Free Part



MSL1

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-LAN, Bluetooth	Date	March 31, 2010
Part Number	FAR-F6KA-2G4418-D4CU	Version 6.0f	

Table 1. Electrical specifications						
Item	Condition (MHz)	Version 6.0f			Unit	Remarks
		Min	Typ	Max		
Insertion Loss	2400 – 2483.5	-	2.6	3.3	dB	
Ripple	2400 – 2483.5	-	1.0	2.0	dB	
VSWR (Input)	2400 – 2483.5	-	1.8	2.2	dB	
VSWR (Output)	2400 – 2483.5	-	1.9	2.2	dB	
Absolute attenuation	DC – 1580	35	44	-	dB	
	1710 – 1805	35	47	-	dB	
	1805 – 1990	34	40	-	dB	
	2110 – 2170	34	39	-	dB	
	4800 – 5000	13	20	-	dB	
Max. Input Power	-	-	-	+10	dBm	Passband,CW
Input impedance	-	50//8.2nH			Ohms	
Output impedance	-	50//12.0nH			Ohms	
Temperature range	Operating	-30 to +85			°C	
	Storage	-40 to +100			°C	
Package size	-	1.4typ x 1.0typ x 0.5max			mm	

TAIYO YUDEN



* Pb Free Part




MSL1

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-LAN, Bluetooth	Date	March 31, 2010
Part Number	FAR-F6KA-2G4418-D4CU	Version 6.0f	

Dimensions


Device size: 1.4typ. x 1.0typ. x 0.5max

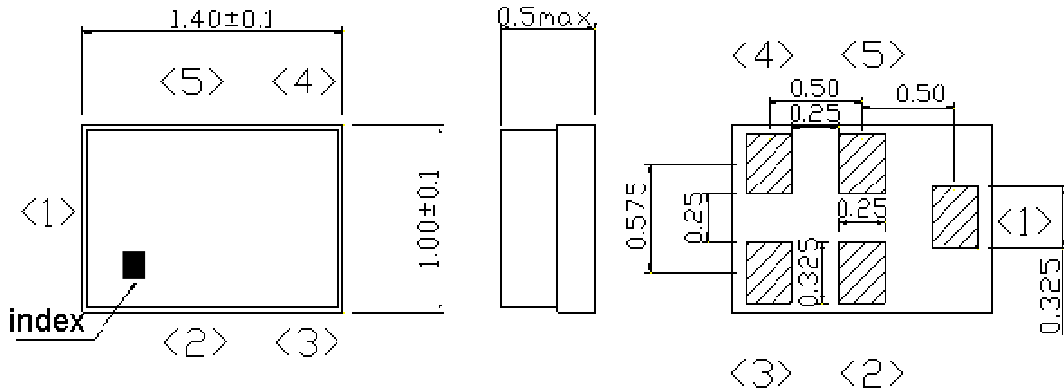

Pin Configuration

Pin No.	Symbol	Function
1	IN	Input
2	GND	Ground
3	GND	Ground
4	OUT	Output
5	GND	Ground

Evaluation Circuit

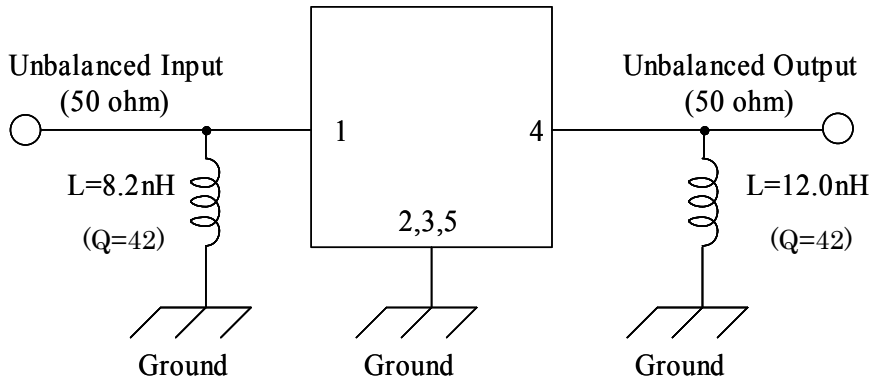

1 to 5 ; Pin No.

TAIYO YUDEN



* Pb Free Part



MSL1

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-LAN, Bluetooth	Date	March 31, 2010
Part Number	FAR-F6KA-2G4418-D4CU	Version 6.0f	

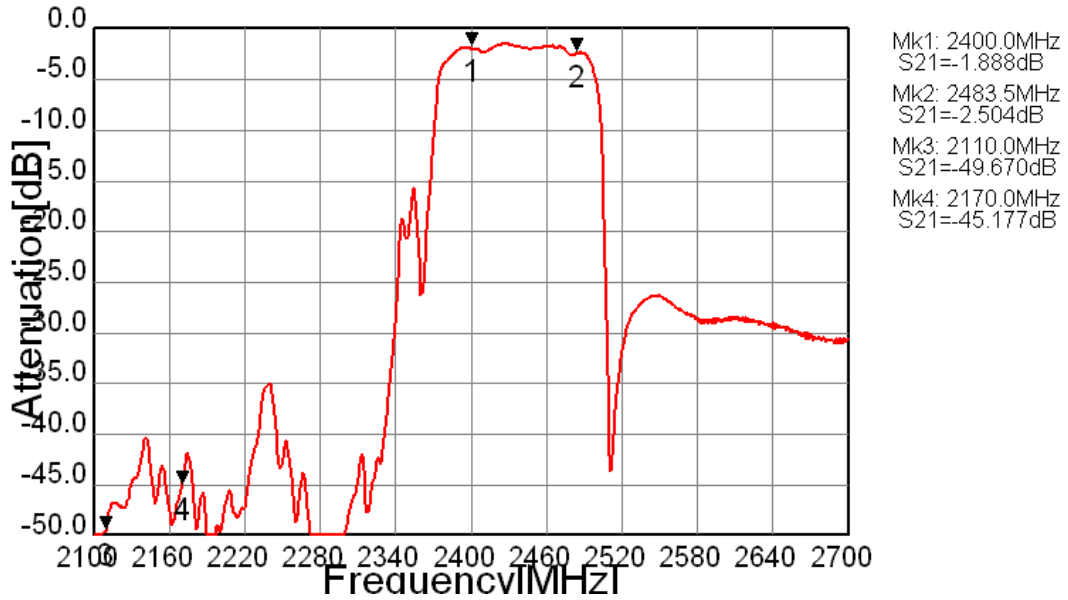


Figure 1. Pass-band Characteristics

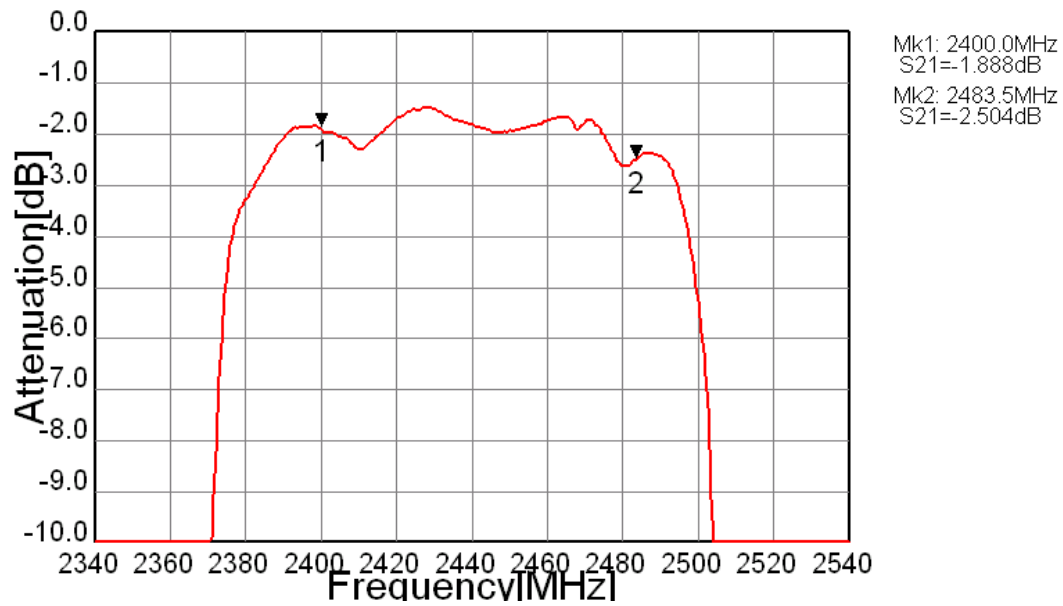


Figure 2. In-band Characteristics

TAIYO YUDEN



* Pb Free Part



MSL1

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-LAN, Bluetooth	Date	March 31, 2010
Part Number	FAR-F6KA-2G4418-D4CU	Version 6.0f	

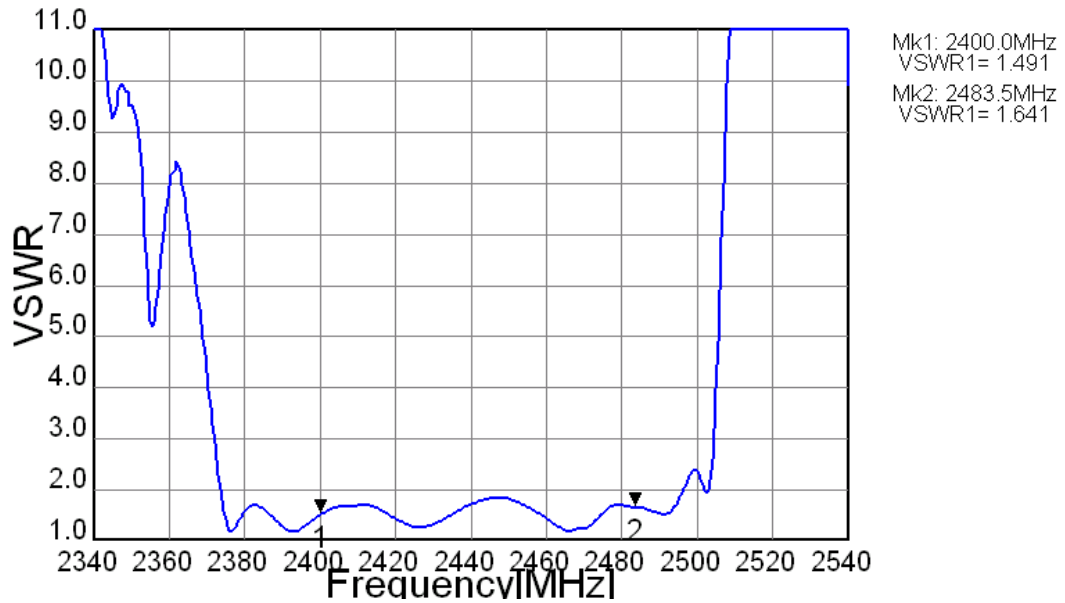


Figure 3. VSWR (Input)

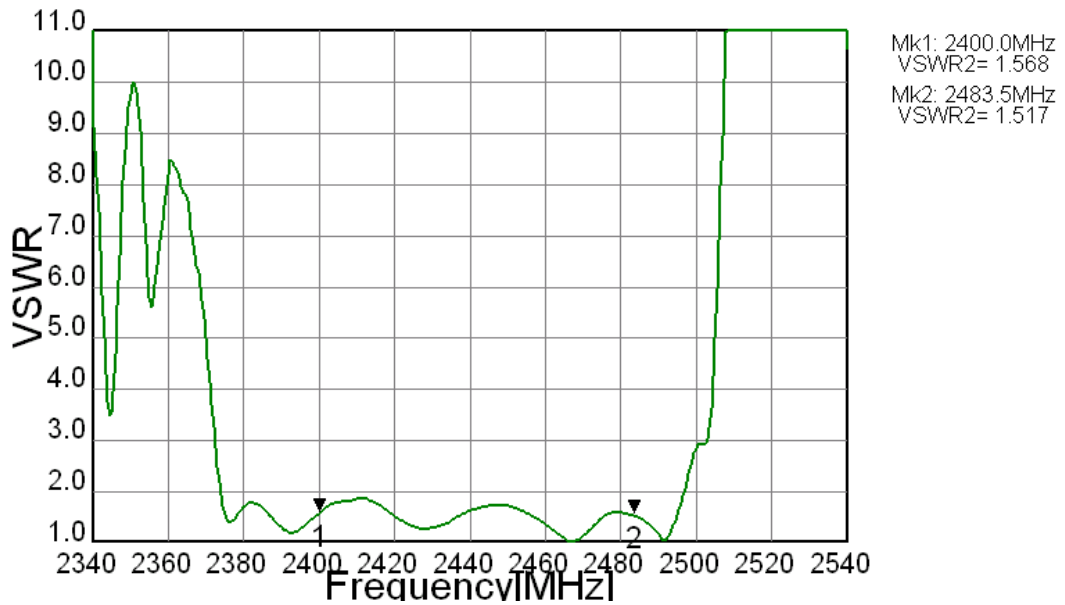


Figure 4. VSWR (Output)


TAIYO YUDEN



MSL1


* Pb Free Part

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-LAN, Bluetooth	Date	March 31, 2010
Part Number	FAR-F6KA-2G4418-D4CU	Version 6.0f	

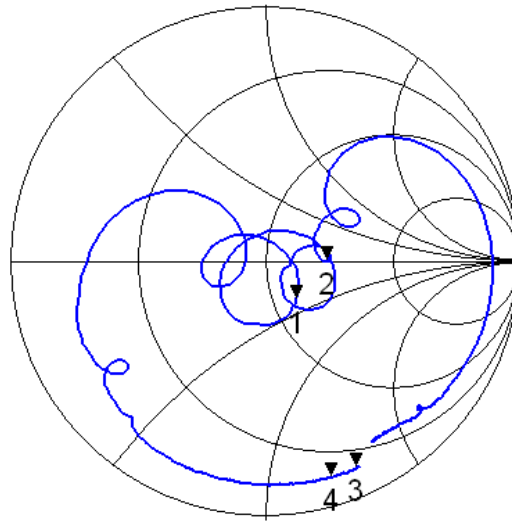

Mk1: 2400.0
 S11= 1.202 -j 0.392
 Mk2: 2483.5
 S11= 1.641 -j 0.004
 Mk3: 2110.0
 S11= 0.195 -j 1.515
 Mk4: 2170.0
 S11= 0.168 -j 1.337

Fig.5 Input Impedance

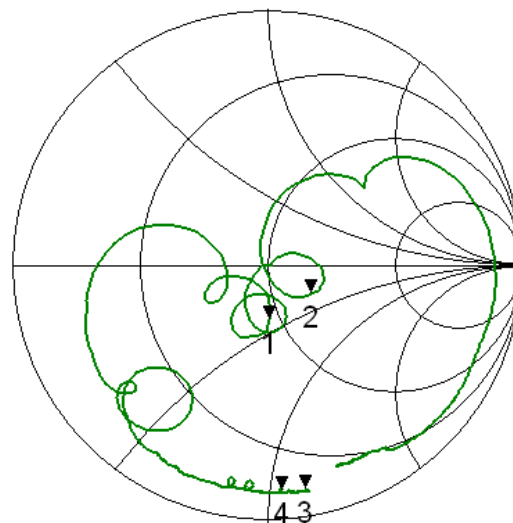

Mk1: 2400.0
 S22= 0.922 -j 0.428
 Mk2: 2483.5
 S22= 1.365 -j 0.328
 Mk3: 2110.0
 S22= 0.131 -j 1.177
 Mk4: 2170.0
 S22= 0.121 -j 1.059

Fig.6 Output Impedance

TAIYO YUDEN



* Pb Free Part



MSL1

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	W-LAN, Bluetooth	Date	March 31, 2010
Part Number	FAR-F6KA-2G4418-D4CU	Version 6.0f	

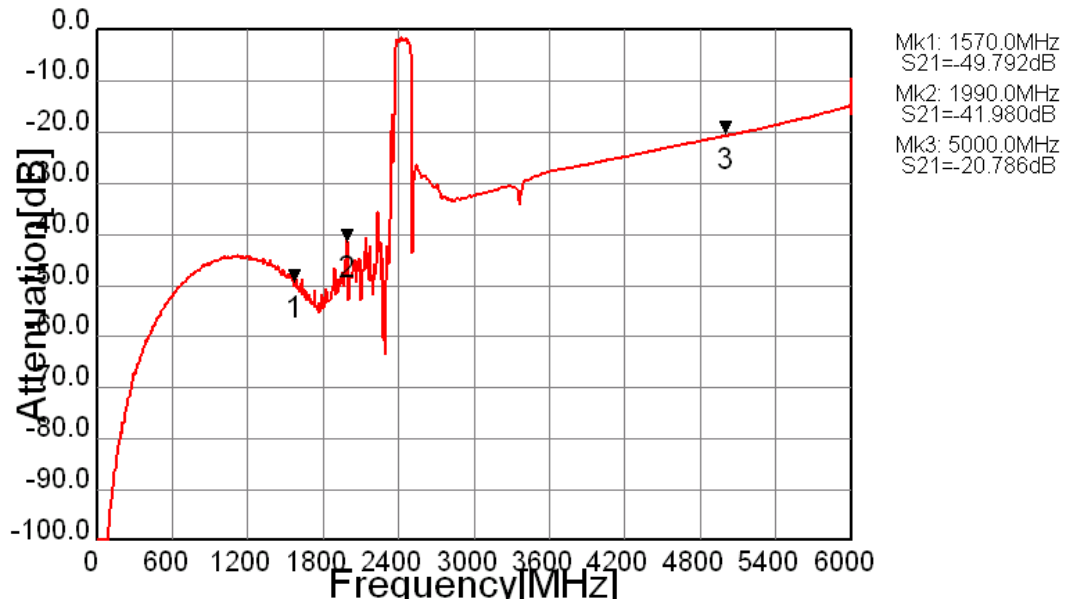


Figure 7. Wide-band Characteristics