


MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

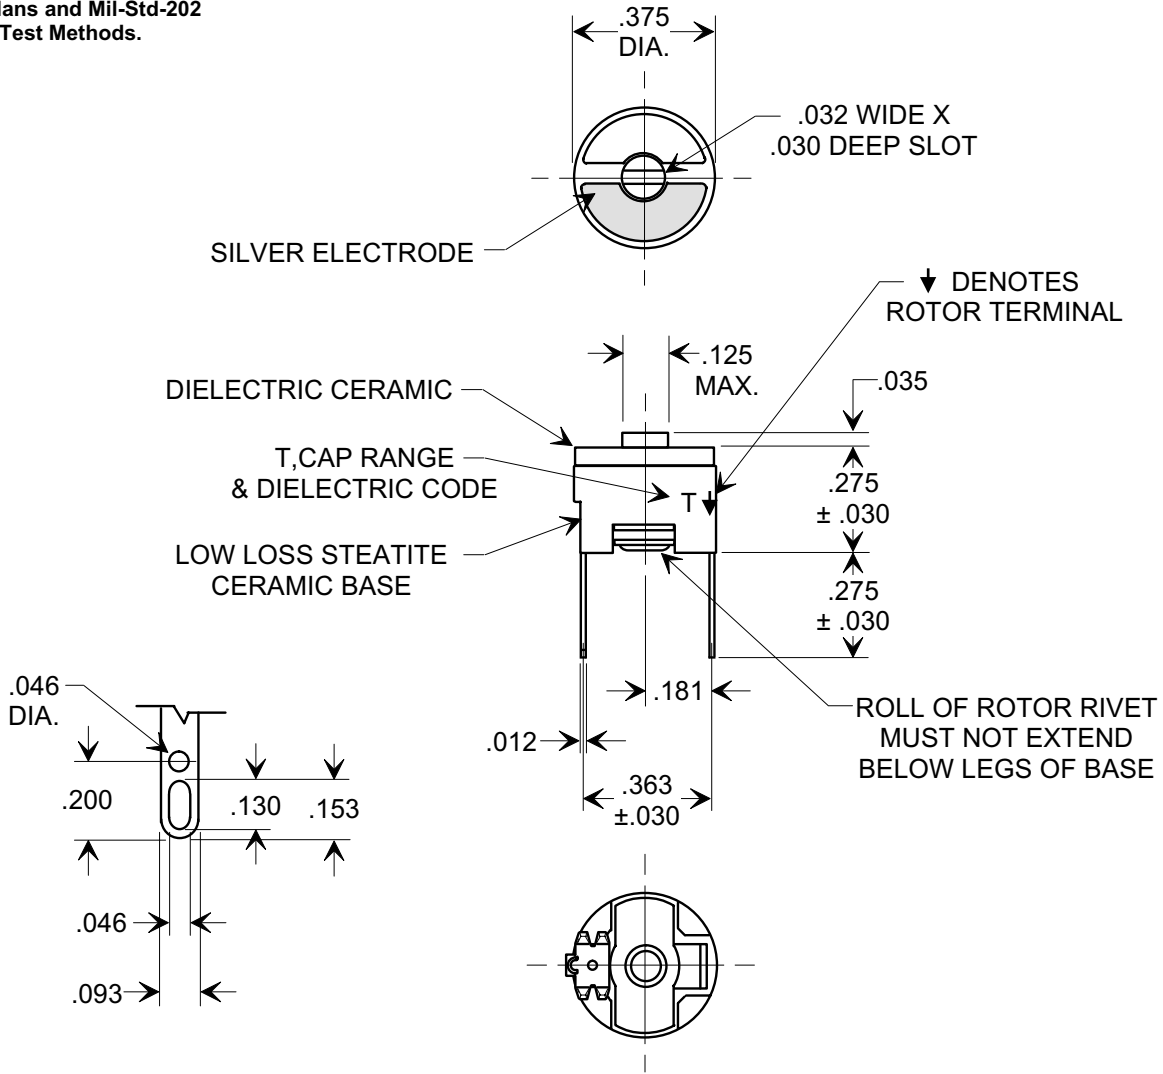

SPECIFICATIONS

Style No.	538-002
Value	9.0-35 pF
Value Tol.	MIN. CAP + 10%, MAX. CAP -10%, +100%
Temp. Coef.	D
Rating	100 VDC
Operating Temperature Range:	-55°C TO + 125°C
To Tusonix Spec Unless Stated Otherwise	

X-2015 Rev-0 REVISION RECORD Original Release C.O. 19990217-4-01	0	TOLERANCES unless otherwise specified 2 PLC. DECIMAL ± $\frac{\quad}{\quad}$ 3 PLC. DECIMAL ± .015	Title			
			TOP ADJUST CERAMIC TRIMMER			
		ANGLES ± $\frac{\quad}{\quad}$	Drawn	S.M. 02-18-99	Scale	2 X
		TUSONIX TUCSON, ARIZONA	Approved	J.Mc. 02-18-99	A 538-002 D 9.0-35	