




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

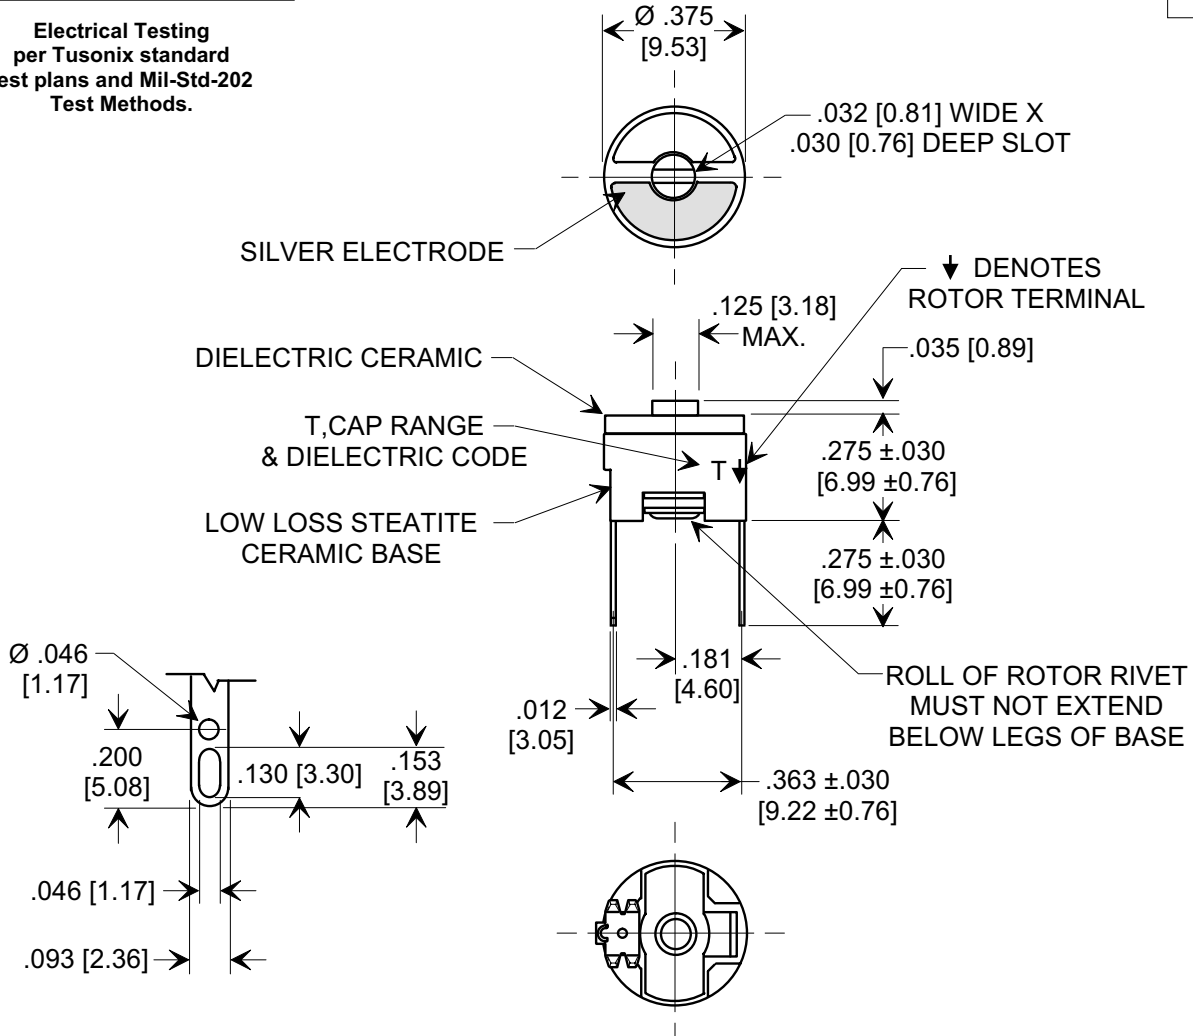

↓ DENOTES ROTOR TERMINAL

NOTES:

1. TUSONIX STANDARD
 PART NUMBER: 538-002-A-2.0-8.
 TUSONIX RoHS COMPLIANT
 PART NUMBER: 538-002-A-2.0-8 LF.
 CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. ALL METAL PARTS SILVER PLATED.
3. PART MARKING: STANDARD PART, BLACK INK; RoHS PART, GREEN INK.

FOR DIMENSIONS $\leq .125"/3.18\text{mm}$,
 TOLERANCE IS $\pm .015"/0.38\text{mm}$.
 FOR DIMENSIONS $\geq .126"/3.20\text{mm}$,
 TOLERANCE IS $\pm .030"/0.76\text{mm}$.

SPECIFICATIONS

| | |
|---|--------------------------------------|
| TUSONIX STYLE | 538-002 |
| VALUE | 2.0-8 pF |
| VALUE TOL. | MIN. CAP + 10%, MAX. CAP -10%, +100% |
| Temp. Coef. | A |
| RATING | 100 VDC |
| OPERATING TEMPERATURE RANGE: | -55°C TO + 125°C |
| INSULATION RESISTANCE: | 10 G Ω MIN. @ 25° C |
| TO TUSONIX SPEC. UNLESS STATED OTHERWISE. | |

| | | | | |
|---|-----------------------------------|--|--|----------------------------------|
| X-2015 Rev-0 REVISION RECORD Original Release C.O. 20080118-2-01 | 0 | TOLERANCES unless otherwise specified 2 PLC. DECIMAL ± $\frac{\quad}{\quad}$ 3 PLC. DECIMAL ± .015 | Title TOP ADJUST CERAMIC TRIMMER | |
| | | | ANGLES ± $\frac{\quad}{\quad}$ | Drawn S.M. 01-18-08 Scale 2 X |
| | TUSONIX TUCSON, ARIZONA | | Approved T.C. 01-18-08 | |
| | | | A | 538-002 A 2.0-8 |