


Item # 4105, D-Shaped Gaskets

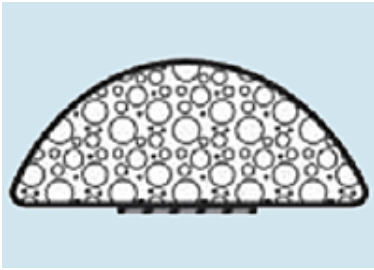

D-Shaped Gaskets

Stock Locator

Laird Technologies specializes in quick turnaround of custom shapes and sizes of EMI shielding gaskets. If you don't find exactly what you need, our engineers will help you design the right solution to your shielding problem.

A sampling for standard profiles are shown; custom configurations and sizes can be designed to meet your specific requirements.

Stock Locator

SPECIFICATIONS

Height	0.375 inches 9.5 mm																				
Width	0.500 inches 12.7 mm																				
Fabric Types	<p>Knit Mesh Ripstop Taffeta</p> <table border="1"> <thead> <tr> <th>Fabric Type</th> <th>Material</th> <th>Construction</th> <th>Application</th> <th>Benefits</th> </tr> </thead> <tbody> <tr> <td>Knit Mesh</td> <td>Nylon 6.6</td> <td>1/2" x 1/2" Mesh</td> <td>RF to Public Gaskets</td> <td>Conductive, Flexible, Tear Resistant, Easy to Assemble</td> </tr> <tr> <td>Ripstop</td> <td>Nylon 6.6</td> <td>1/2" x 1/2" Mesh</td> <td>Public Gaskets</td> <td>Conductive, Flexible, Tear Resistant</td> </tr> <tr> <td>Taffeta</td> <td>Nylon 6.6</td> <td>1/2" x 1/2" Mesh</td> <td>RF Gaskets</td> <td>Conductive, Flexible, Tear Resistant</td> </tr> </tbody> </table>	Fabric Type	Material	Construction	Application	Benefits	Knit Mesh	Nylon 6.6	1/2" x 1/2" Mesh	RF to Public Gaskets	Conductive, Flexible, Tear Resistant, Easy to Assemble	Ripstop	Nylon 6.6	1/2" x 1/2" Mesh	Public Gaskets	Conductive, Flexible, Tear Resistant	Taffeta	Nylon 6.6	1/2" x 1/2" Mesh	RF Gaskets	Conductive, Flexible, Tear Resistant
Fabric Type	Material	Construction	Application	Benefits																	
Knit Mesh	Nylon 6.6	1/2" x 1/2" Mesh	RF to Public Gaskets	Conductive, Flexible, Tear Resistant, Easy to Assemble																	
Ripstop	Nylon 6.6	1/2" x 1/2" Mesh	Public Gaskets	Conductive, Flexible, Tear Resistant																	
Taffeta	Nylon 6.6	1/2" x 1/2" Mesh	RF Gaskets	Conductive, Flexible, Tear Resistant																	
Pressure Sensitive Adhesive	<table border="1"> <thead> <tr> <th>Adhesive</th> <th>Material</th> <th>Application</th> </tr> </thead> <tbody> <tr> <td>3M™</td> <td>9480</td> <td>High Dielectric, High Temperature, Excellent Adhesion</td> </tr> <tr> <td>3M™</td> <td>9480</td> <td>High Dielectric, High Temperature, Excellent Adhesion</td> </tr> </tbody> </table>	Adhesive	Material	Application	3M™	9480	High Dielectric, High Temperature, Excellent Adhesion	3M™	9480	High Dielectric, High Temperature, Excellent Adhesion											
Adhesive	Material	Application																			
3M™	9480	High Dielectric, High Temperature, Excellent Adhesion																			
3M™	9480	High Dielectric, High Temperature, Excellent Adhesion																			
Foam Types	<p>Thermoplastic Elastomer (TPE) Urethane</p> <table border="1"> <thead> <tr> <th>Foam Type</th> <th>Construction</th> <th>Color</th> <th>Application</th> <th>Benefits</th> </tr> </thead> <tbody> <tr> <td>Urethane</td> <td>1/2" x 1/2"</td> <td>Black or Grey</td> <td>RF to Public Gaskets</td> <td>Non-Conductive, Low Compression, Durable</td> </tr> <tr> <td>Thermoplastic Elastomer (TPE)</td> <td>1/2" x 1/2"</td> <td>Black</td> <td>Public Gaskets</td> <td>Conductive, Flexible, Tear Resistant</td> </tr> </tbody> </table>	Foam Type	Construction	Color	Application	Benefits	Urethane	1/2" x 1/2"	Black or Grey	RF to Public Gaskets	Non-Conductive, Low Compression, Durable	Thermoplastic Elastomer (TPE)	1/2" x 1/2"	Black	Public Gaskets	Conductive, Flexible, Tear Resistant					
Foam Type	Construction	Color	Application	Benefits																	
Urethane	1/2" x 1/2"	Black or Grey	RF to Public Gaskets	Non-Conductive, Low Compression, Durable																	
Thermoplastic Elastomer (TPE)	1/2" x 1/2"	Black	Public Gaskets	Conductive, Flexible, Tear Resistant																	
Height and Width Tolerance	± .020 inches ± 0.5 mm																				