


Feedthrough EMI Filter Datasheet
(6-32 UNC Thread : 4.4mm Round Head)

Circuit Configuration



Dimensions mm (inches)

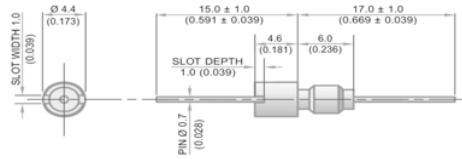

6-32 UNC Class 2A Thread

Electrical Details	
Electrical Configuration	C Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000ΩF
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	Not Applicable
Mechanical Details	
Head Diameter	4.4mm (0.173")
Nut A/F	N/a. For use in tapped hole
Washer Diameter	N/a
Mounting Torque	0.15Nm (1.32lbf in) max.
Mounting Hole	6-32 UNC Class 2B
Max. Panel Thickness	N/a
Weight (Typical)	0.8g (0.03oz)
Finish	Silver plate on copper undercoat

Product Code	Capacitance ±20% UOS	Dielectric	Rated Voltage (dc)	DWV (dc)	Typical Insertion Loss (db)					
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
* SFKBC5000100ZC	10pF -20% / +80%	COG	500	750						4
SFKBC5000150ZC	15pF -20% / +80%	COG	500	750						7
SFKBC5000220ZC	22pF -20% / +80%	COG	500	750						10
SFKBC5000330ZC	33pF -20% / +80%	COG	500	750						12
* SFKBC5000470ZC	47pF -20% / +80%	COG	500	750					1	15
* SFKBC5000680MC	68pF	COG	500	750					2	18
* SFKBC5000101MC	100pF	COG	500	750					4	22
SFKBC5000151MC	150pF	COG	500	750					7	25
* SFKBC5000221MC	220pF	COG	500	750					10	29
* SFKBC5000331MC	330pF	COG	500	750					13	33
* SFKBC5000471MX	470pF	†X7R	500	750				1	16	35
SFKBC5000681MX	680pF	†X7R	500	750				2	19	36
* SFKBC5000102MX	1.0nF	X7R	500	750				4	23	41
SFKBC5000152MX	1.5nF	X7R	500	750				7	26	45
* SFKBC5000222MX	2.2nF	X7R	500	750				10	30	50
SFKBC5000332MX	3.3nF	X7R	500	750				13	33	52
* SFKBC5000472MX	4.7nF	X7R	500	750			1	16	36	55
SFKBC5000682MX	6.8nF	X7R	500	750			2	19	39	57
* SFKBC5000103MX	10nF	X7R	500	750			4	22	41	60
* SFKBC5000153MX	15nF	X7R	500	750			7	25	44	62
* SFKBC5000223MX	22nF	X7R	500	750			10	29	46	65
SFKBC5000333MX	33nF	X7R	500	750			13	33	48	68
* SFKBC2000473MX	47nF	X7R	200	500		1	16	35	50	70
SFKBC2000683MX	68.0nF	X7R	200	500		2	19	39	54	>70
SFKBC1000104MX	100nF	X7R	100	250		4	22	41	57	>70
SFKBC0500154MX	150nF	X7R	50	125		7	25	45	60	>70

* Recommended values

† Also available in COG

Ordering Information

Type	Case Style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Capacitance Tolerance	Dielectric	Hardware
SF	K	B	C	500	0102	M	X	O
Syfer Filter	4.4mm O.D.	6-32 UNC	C = C Filter	050 = 50V 100 = 100V 200 = 200V 500 = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is the number of zeros following. Examples: 0101 = 100pF 0332 = 3300pF	M = ±20% Z = -20+80%	C = COG/NPO X = X7R	O = Without

Note: Installation tool available on request

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.

Options include for example: change of pin length / custom body dimensions or threads / alternative voltage rating / non-standard intermediate capacitance values / test requirements.

Please refer specific requests to the factory.

