

3MTM XYZ-Axis Electrically Conductive Acrylic eCAP Pads 7830N

Data Sheet

August 2008


Product Description 3MTM XYZ-Axis Electrically Conductive Acrylic eCAP Pads 7830N represent a breakthrough in PSA tape and conductive gasket technology. 3M eCAP products are self-stick EMI gaskets or adhesive transfer tapes which provide good electrical conductive path for EMI shielding and grounding in electronic devices. Developed with 3M proprietary technology, 3M eCAP achieves a unique filler distribution in three-dimensional structures throughout the adhesive matrix. This filler distribution in a high performance 3M adhesive makes the tape have good xyz-axis electrical conductivity and good adhesion performance. 3M eCAP products are an excellent choice of EMC designers for initial to final stages of EMC design for electronic components and assemblies.

- Product Features**
- Competitive price with low conductive filler content
 - No burr
 - Various thickness
 - Standard thickness of 7830N: 0.2, 0.3, 0.4, 0.5 mm
 - Easy application in die-cut or in roll form
 - No need for additional process for PSA coating
 - Single-sided
 - Good XYZ-axis electrical conductivity
 - Good shock absorption and damping performance
 - Good adhesive and cohesive strength
 - Rework – easy removal without adhesive residue
 - Globally patented technology

Applications 3M eCAP Pads are a combination of established 3M adhesive technology with state-of-the-art conductive technology. The PSA matrix is filled with conductive fillers which allow interconnection between substrates through the adhesive thickness (the “Z-axis”), and also helps provide electrical conductivity and EMI shielding in the plane of the adhesive (“X-Y Axis”). 3M eCAPs are ideal for EMI/RFI shield and EMI/RFI gasket to metal surfaces and also electrical bonding and grounding. 3M eCAP Pads can be applied as die cut parts or in roll form and offers excellent cutting properties in various converting process.




3M™ XYZ-Axis Electrically Conductive Acrylic eCAP Pads 7830N

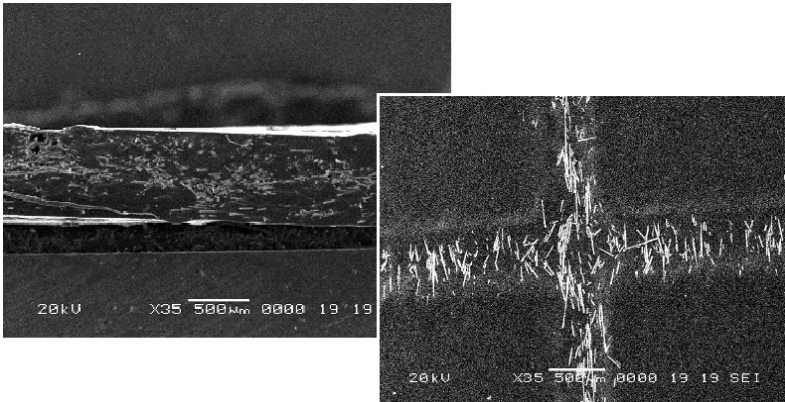

Electrically conductive fillers distributed in z and x,y-axis (Left) and exposed on the adhesive surface (Right) of 3M™ XYZ-Axis Electrically Conductive Acrylic Pads (eCAP)

Physical Properties: 3M™ XYZ-Axis Electrically Conductive Acrylic eCAP Pads 7830N, a conductive gasket line with single-sided adhesion, consists of a high performance 3M acrylic adhesive loaded with conductive fillers and a conductive fabric laminate. 3M eCAP 7830N is the best choice for gasket in 0.1 ~ 0.45 mm gap in electronic components and devices.

Product Description of 3M eCAP 7830N

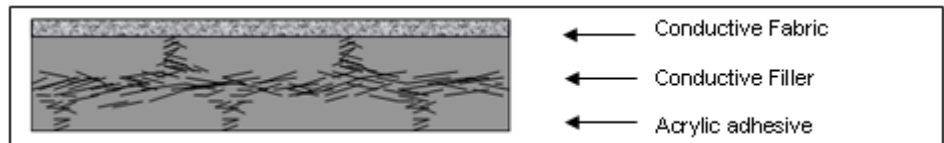

Conductive Fabric

Color	Dark Grey
Woven Material	PET Woven Fabric
Pleated Material	Copper – Nickel
Thickness	0.05 mm

Conductive Acrylic Adhesive

Color	Black
Conductive Filler	Nickel-Coated Graphite Fiber
Adhesive	Acrylic Pressure-Sensitive Adhesive

Typical Properties: Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

Product Number	7830N	Test Method
Thickness	0.2, 0.3, 0.4, 0.5 mm	3M TM
180° Peel Adhesion	700 ~ 100 gf/ inch	3M TM
Surface Resistance on Fabric Surface	0.1 Ω/ in ²	3M TM
Z-axis Resistance	0.5 Ω	3M TM
Compression Deflection ¹	15 kg/ in ²	3M TM
Compression Set ²	14%	3M TM

3M™ XYZ-Axis Electrically Conductive Acrylic eCAP Pads 7830N

Typical Properties:

¹ Compression Deflection: Measured at 25% compression (12 mm/min)

² Compression Set: Compressed 25% for 22 hrs at 70°F, expressed as a percentage of the original thickness, as follows:


$$C_d = [(t_o - t_f) / t_o] \times 100$$

C_d = compression set expressed as a percent of the original thickness

t_o = original thickness of test specimen

t_f = final thickness of test specimen

Force Displacement Resistance Curve of 7830N 0.2 ~ 0.5T:

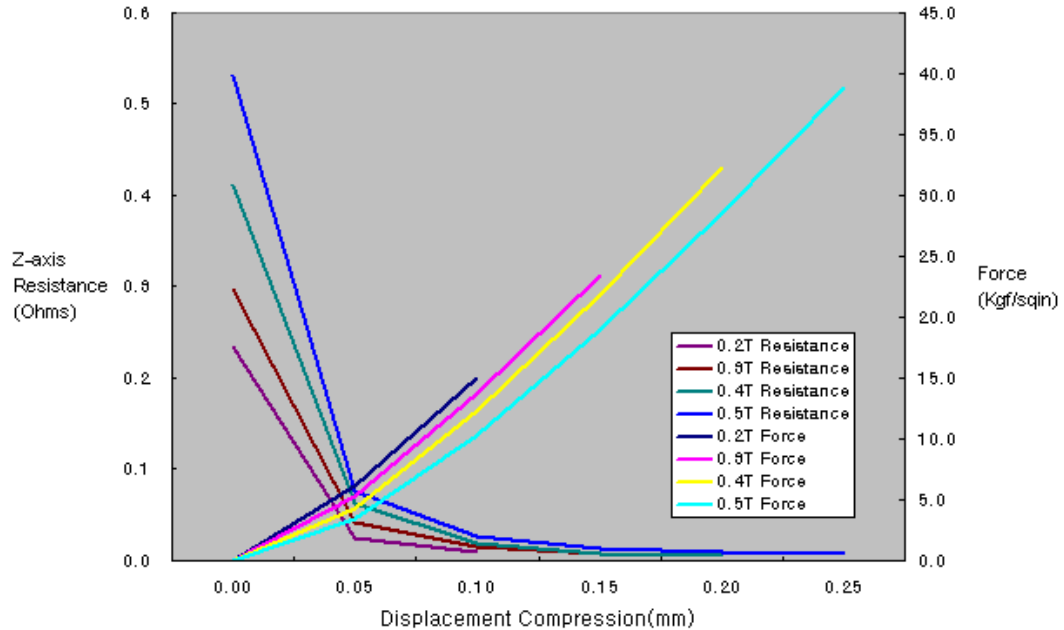

Important Notice:

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability:

This product will be free from defects in material and manufacture from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**

3M is a trademark of 3M Company.



Electrical Markets Division
 6801 River Place Blvd.
 Austin, TX 78726-9000
 800 676 8381
 FAX 800 828 0329
www.3M.com/electrical/oem

Please recycle.
 © 3M 2008 All rights reserved.
 78-8131-7639-9_B