


LEAD FINISH: GOLD	
CASING FINISH: GOLD	
CAPACITANCE	500pF GMV
TEMP. RANGE	-55°C TO 125°C
CURRENT	5 AMP MAX.
WORKING VOLTAGE	125°C 115 VAC MAX. 125°C 200 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	--
10	--
100	15
300	22
1 GHz	35
10 GHz	40

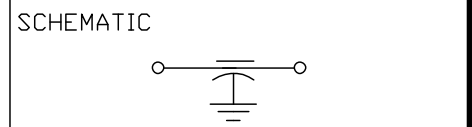


MARKING:
 PART: BROWN COLOR DOT
 BAG:
 SCIF-9920-501
 DATE CODE
 LOT NO.
 QTY/BAG (200 MAX.)

NOTES:

1. SUGGESTED MOUNTING HOLE= $\phi.132 \pm .002$
2. MAX SOLDERING TEMP: 245°C FOR 20 SECONDS MAX
3. THIS IS A LEAD FREE PRODUCT



				00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC. Dwn. DONALDSON Ckd. 8/6/10 Apvd. Scale NONE	ERIE, FAIRVIEW PENNSYLVANIA
				CN 55320-ENG	CHANGE NOTICE	Fractions $\pm 1/64$		Description
						Dec. $.xx \pm .03$		FEEDTHRU FILTER
						Dec. $.xxx \pm .005$		
						Angles $\pm 0^\circ 30'$		
						CODE IDENT. NO. QLSP2		SCIF-9920-501