


# PDF Technical File


Visitors to this web site are authorized to download this information for reprints or electronic transfer to their technical reference files.



## sleeve snap

**WITH VARIABLE DIAMETER END PORTS.** Box-shaped ferrite assembly in fully enclosed nylon case. End ports are surrounded with flexible spring flutes to grip a range of cable diameters from .125" to .500" (3,2 to 12,7 mm). Special mounting options include foam adhesive pad on bottom.

Very effective from 1 MHz to 60 MHz; peak attenuation at 30 MHz. See pages 36 and 37 for impedance curve characteristics.


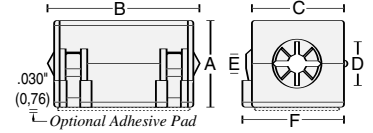


Available in standard colors gray (i.e., SS33B2037) and black (i.e., SS33B2037K)

Patent No. 5,003,278 and Patent No. 5,764,125

PART No.	w/ Adhesive	A	B (ref.)	C	D	E	F	IMPEDANCE IN OHMS	
SS33B2037	AS33B2037	.790	20,1	1.450	36,8	.770	19,6	.350 8,8 .200 5,1 .885 22,5	23 @ 30 MHz
SS33B2032	AS33B2032	1.155	29,3	1.450	36,8	1.125	28,6	.500 12,7 .200 5,1 1.230 31,2	27 @ 30 MHz

For specific performance by part number, find the alpha-numeric designation on the charts below according to the last seven digits of each catalog part number; i.e., for part number "CS28B1937" see "28B1937" on the chart.

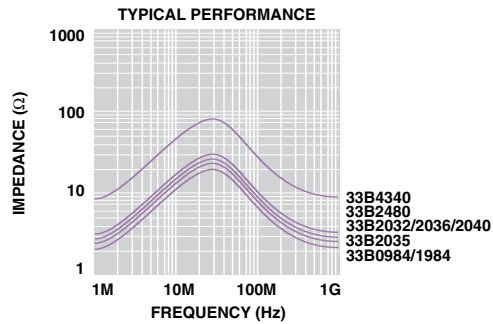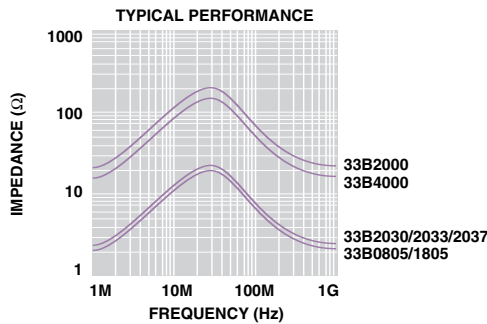

For further technical information, please contact us at:

**FerriShield<sup>®</sup>**, INC.  
Interference Control Components

Mulberry Professional Plaza • 426 Mulberry Street \* Suite 300 • Scranton, PA 18503  
Tel: 570.961.5617 • Fax: 570.969.6274 • e-mail: info@ferrishield.com

[www.ferrishield.com](http://www.ferrishield.com)

ISO 9001:2000 registered