


- NOTES:
- 1) CAPACITANCE (1000hrs.): 10000pF
  - 2) CAP TOLERANCE: +100/-20%
  - 3) DISSIPATION FACTOR: 4% MAX.
  - 4) INSULATION RESISTANCE: 25°C 1GOhm
  - 5) 100 VDC RATED @ +125°C
  - 6) DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
  - 7) CURRENT RATING: 10 AMPS
  - 8) REFLOW TEMPERATURE LIMIT: +235°C FOR 5 SEC.
  - 9) PACKAGING: BAG (1000 PCS. MAX./ BAG)



MARKING:  
 PART: NONE  
 PACKAGE: PART NO.  
 SCI DATE CODE  
 QTY.

REV.	QTY.	DATE	DESCRIPTION
00			
01			
02			
03			
04			
05			
06			
07			
08			
09			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			

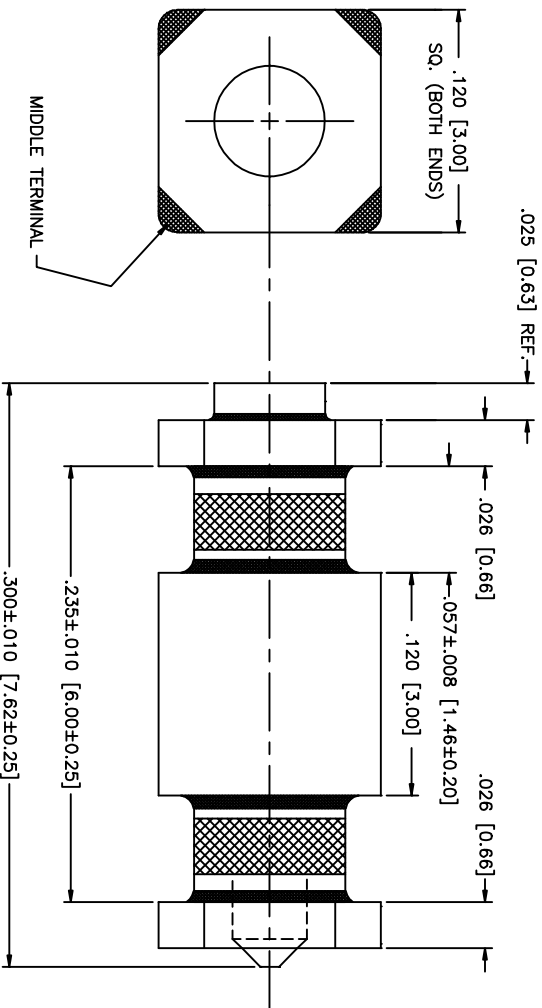

Quality Products From The Specialists In Electro-Magnetic Compatibility