


SERIES 5500R 5500



High Current Power Chokes

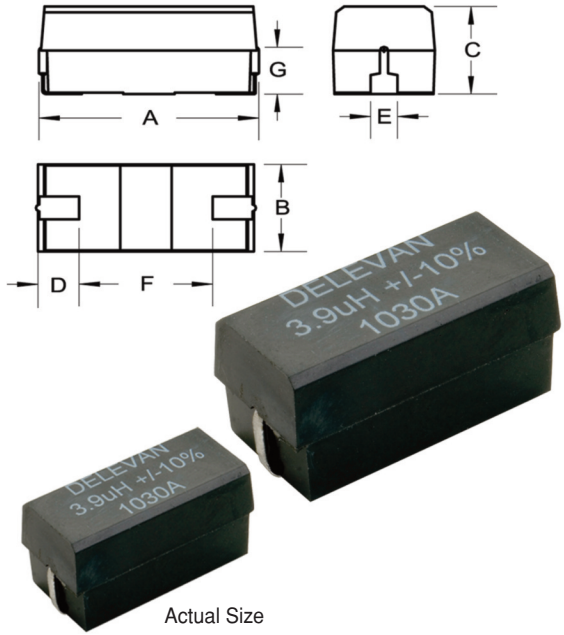

Actual Size

Physical Parameters

	Inches	Millimeters
A	1.020 to 1.080	25.91 to 27.44
B	0.480 to 0.510	12.20 to 12.96
C	0.510 Maximum	12.96 Maximum
D	0.240 Minimum	6.10 Minimum
E	0.120 to 0.160	3.05 to 4.07
F	0.500 (Ref. Only)	12.70 (Ref. Only)
G	0.250 (Ref. Only)	6.35 (Ref. Only)

Dimensions "A" and "C" and "G" are over the terminals.

Operating Temperature Range -55°C to +130°C

Current Rating at 85°C Ambient 45°C Temperature Rise

Maximum Power Dissipation at +85°C: 1.166 Watts Maximum

Inductance Measured @ 1 kHz with 0 ADC on Wayne Kerr 3245A, or equivalent.

Incremental Current The amount of DC that decreases the Inductance by 5% maximum relative to the 0 ADC.

Dielectric Withstanding Voltage Meets MIL-STD-202, Method 301, 1000 Vrms Minimum

Marking DELEVAN, INDUCTANCE VALUE/TOLERANCE and DATE CODE/LOT SYMBOL (YYWWL). Note: An "R" before the date code/lot symbol indicates a RoHS Compliant choke.

DELEVAN
3.9uH +/-10%
RYYWWL

Thermal Shock Meets MIL-STD-202, Method 107, Test Condition A-1 (-55°C to +130°C).

Mechanical Shock Meets MIL-STD-202, Method 213, Test Condition I.

Vibration Meets MIL-STD-202, Method 204, Test Condition D

Solderability Meets MIL-STD-202, Method 208

Terminal Material and Final Finish

Series 5500R: (Tin - Silver - Copper) Sn96.5Ag3.0Cu0.5 over Copper (Cu)
Series 5500: (Tin - Lead) Sn63Pb37 over Copper (Cu)

Weight 13 Grams Maximum

Packaging Tape and Reel (44mm): 13" reel, 200 pieces max: 7" reel not available

Made In The U.S.A.

DASH NUMBER*	±10% (uH @ 1.00 kHz)	INDUCTANCE	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAXIMUM (A DC)	INCREMENTAL CURRENT (A DC)
--------------	----------------------	------------	------------------------------	-------------------------------	----------------------------

SERIES 5500R AND 5500					
-392K	3.9	0.007	11.91	9.13	
-472K	4.7	0.008	11.14	8.30	
-562K	5.6	0.011	9.50	7.61	
-682K	6.8	0.012	9.10	7.02	
-822K	8.2	0.013	8.74	6.52	
-103K	10	0.016	7.88	5.71	
-123K	12	0.018	7.43	5.07	
-153K	15	0.020	7.05	4.57	
-183K	18	0.022	6.72	4.15	
-223K	22	0.024	6.43	3.65	
-273K	27	0.025	6.30	3.38	
-333K	33	0.028	5.96	3.04	
-393K	39	0.031	5.66	2.85	
-473K	47	0.034	5.41	2.61	
-563K	56	0.043	4.81	2.34	
-683K	68	0.060	4.08	2.12	
-823K	82	0.066	3.88	1.94	
-104K	100	0.084	3.44	1.76	
-124K	120	0.113	2.96	1.60	
-154K	150	0.129	2.78	1.43	
-184K	180	0.150	2.57	1.30	
-224K	220	0.162	2.48	1.19	
-274K	270	0.226	2.10	1.07	
-334K	330	0.257	1.97	0.96	
-394K	390	0.288	1.86	0.88	
-474K	470	0.393	1.59	0.81	
-564K	560	0.504	1.40	0.74	
-684K	680	0.570	1.32	0.68	
-824K	820	0.643	1.24	0.63	
-105K	1,000	0.844	1.08	0.56	
-125K	1,200	0.977	1.01	0.51	
-155K	1,500	1.18	0.92	0.45	
-185K	1,800	1.50	0.81	0.41	
-225K	2,200	1.76	0.75	0.37	
-275K	2,700	2.13	0.68	0.32	
-335K	3,300	2.53	0.63	0.30	
-395K	3,900	2.84	0.59	0.28	
-475K	4,700	3.79	0.51	0.25	
-565K	5,600	4.24	0.48	0.23	
-685K	6,800	5.75	0.42	0.21	
-825K	8,200	6.44	0.39	0.19	
-106K	10,000	7.30	0.37	0.17	
-126K	12,000	9.34	0.33	0.16	
-156K	15,000	10.7	0.30	0.14	
-186K	18,000	14.8	0.26	0.13	
-226K	22,000	18.0	0.23	0.12	
-276K	27,000	22.7	0.21	0.10	
-336K	33,000	25.7	0.20	0.09	
-396K	39,000	29.7	0.18	0.09	
-476K	47,000	33.7	0.17	0.08	
-566K	56,000	38.0	0.16	0.07	
-686K	68,000	52.8	0.14	0.07	
-826K	82,000	67.3	0.12	0.06	
-107K	100,000	76.0	0.11	0.05	

OPTIONAL TOLERANCES: J = +/- 5% L = +/- 15%

The Suffix (Optional Tolerance "J" or "L") should replace the "K", in the dash number.

*Complete part # must include series # PLUS the dash #

