

ET3542-051

Description:

Common-mode coils are useful in a wide range of applications for the prevention of electromagnetic interference (EMI) and radio frequency interference (RFI) from power supply lines and for prevention of malfunctioning of various electronic equipments. Features include low leakage flux, high self-resonant frequency, high impedance at applicable frequency and low stray capacitance in section winding. Designed to meet UL, CSA and IEC standards.

Electrical Specifications (@20°C):

Min. Inductance* (mH)	Inductance Difference (µH) Max	Max. DC (Ω) Resistance	Amps RMS
33.00	1000	0.50	1.50

*inductance per winding.

Specifications:

Rated Voltage = 250VAC
Temperature Rise = 45°C Max
Insulation Resistance = 100M Ω Min
Operating Temperature Range = -20 to 105°C
Dielectric Withstanding Voltage = 2,000 VAC


Dimensions:

W	L	H	A	B
1.496	1.024	1.772	.827	.591

Units in inches.





Weight: 2.60 oz.

Schematic:



RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2002/95/EC, known as the RoHS initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetcs' website for the most current version.

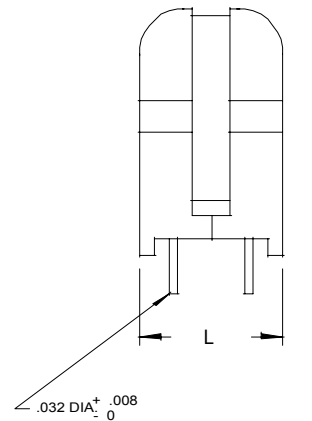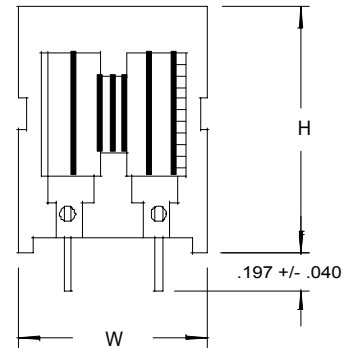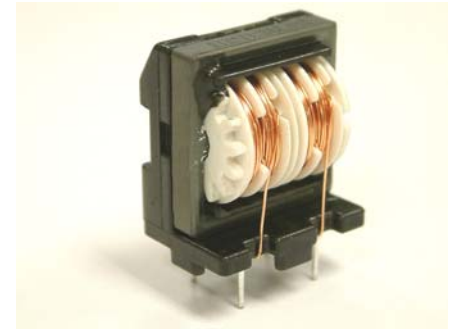

PIN MOUNTING