

4




3

2




1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
F	LNK	DESCRIPTION	DATE	BY	APPD
C1		REVISED PER ECO-11-005033	29MAR11	RK	HMR

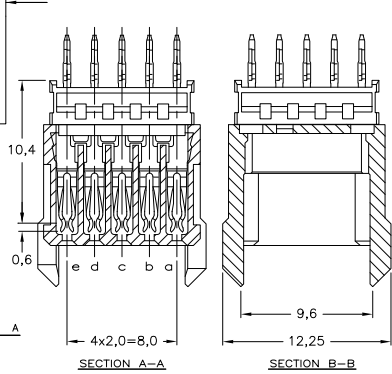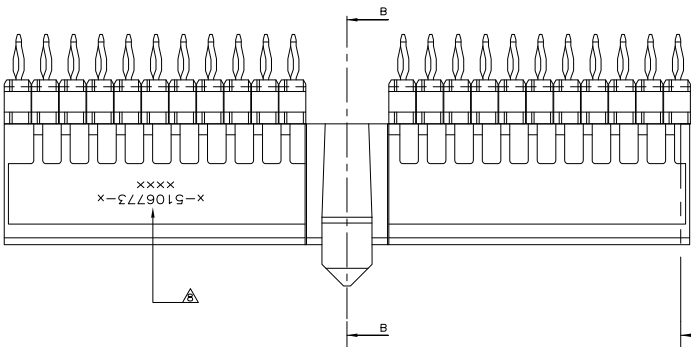

ALTERNATE FORM

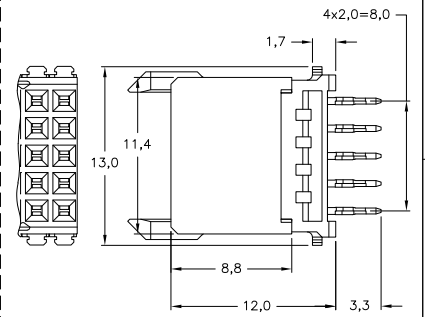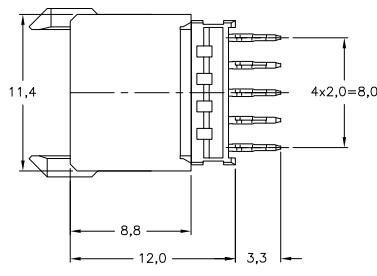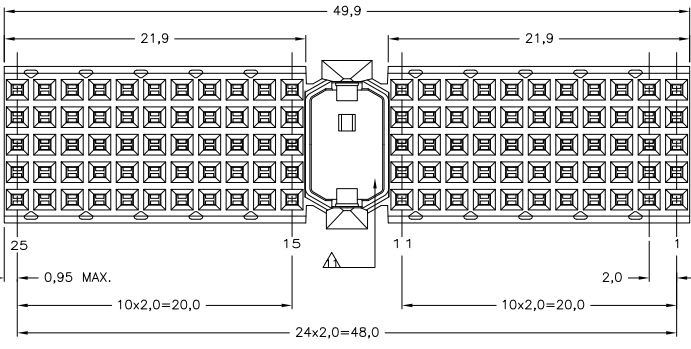

- NOTES:**
- ▲ MATERIAL CONTACT: PHOSPHORBRONZE  
MATERIAL HOUSING: GLASSFILLED POLYESTER UL-RATING 94V0 (GRAY).
  - ▲ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1.27µm NICKEL MIN. AND ACTION PIN: 0.5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
  - ▲ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
  - ▲ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
  - ▲ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
  - ▲ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
  - ▲ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
  - ▲ CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE.
  - ▲ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID (110 HOLES).
  - ▲ HOLES IN ROW f AND z FOR POSSIBLE FUTURE USE OF GROUND RETURN SHIELD. (SHIELDS NOT YET TOOLED)
  - ▲ AREA RESERVED FOR KEYING PART (BASIC P.N.:100526).

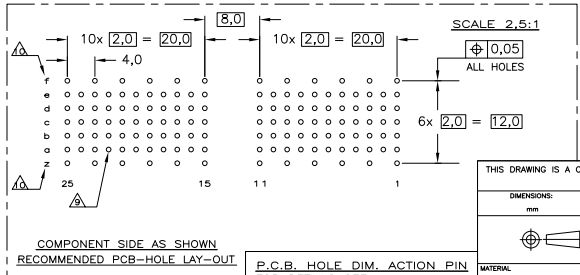

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED:	
1-PLD	±0.2
2-PLD	±0.2
3-PLD	±0.2
4-PLD	±0.2
ANGLES:	
MATERIAL:	FINISH

FINISH	MATERIAL	PARTNUMBER
▲▲▲		1-5106773-9
▲▲▲		5106773-9
▲▲▲		5106773-4
▲▲▲		5106773-1

TE Connectivity

Z-PACK 2mm HM TYPE A  
110 POS. VERTICAL FEMALE  
CONNECTOR ASSEMBLY

DATE: 12AUG2004  
CHK: K.N.KIBAN  
APPD: S.MOOU  
PRODUCT SPEC: 108-19082  
APPLICATION SPEC: 114-19029  
HEIGHT: -

SIZE: A2  
CAGE CODE: 00779  
DRAWING ID: C=5106773

CUSTOMER DRAWING

SCALE: 5:1  
SHEET: 1 of 1  
REV: C1