
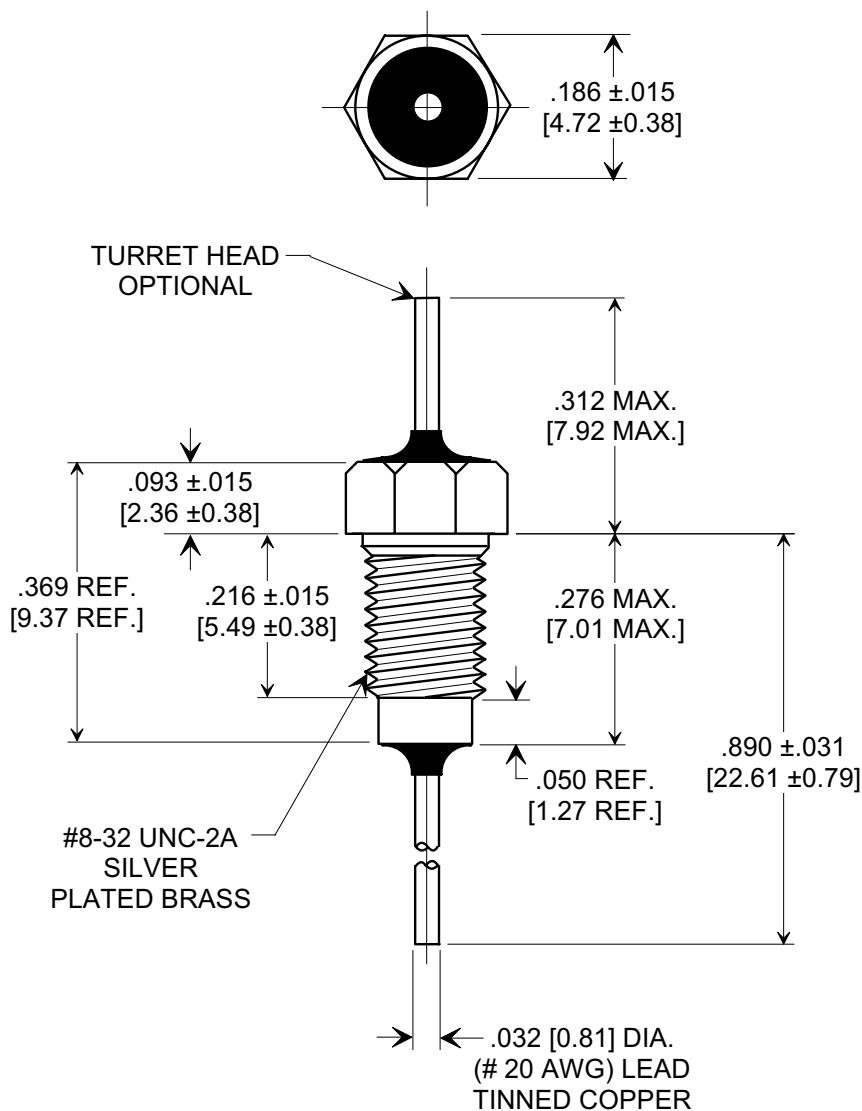



**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

Electrical Testing  
 per Tusonix standard  
 test plans and Mil-Std-202  
 Test Methods.



#8-32 UNC-2A  
 SILVER  
 PLATED BRASS

MIN. CAP.	125°C WORKING VOLTAGE	CURRENT I <sub>dc</sub>	MINIMUM NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220					
			1 MHz	10 MHz	100 MHz	200 MHz	1 GHz	10 GHz
22,000 pF	100 VDC	10 A	10	30	42	45	60	60

REVISION RECORD			-TOLERANCES-- Unless Otherwise Specified	Title <b>EMI FILTER</b> <b>MIL 15733/61-0013</b>	
	Original Release	C.O.			
WAS SK7096-004-S	E.C.06-14-93	0			
930528-2	DWG. REVISED E.C. 05-12-94	1			
940217-3	RDN TO COMP FMT & DIM. 312 REVISED, DIM .890 ADDED & REVISED TITLE. S.M. 0-04-99	2			
19990430-3-01	REVISED TITLE & ADDED ORIENTATION. S.M. 12-18-01	3			
20011210-2-05	REVISED THREAD NOTE. S.M. 11-21-05	4			
20051116-3-03					
TUSONIX			Drawn S.M. 05-04-99	Scale 4 X	
TUCSON, ARIZONA			Approved J.Mc. 05-04-99		
A			4251-502		