


» pITX-SP 2.5" SBC «

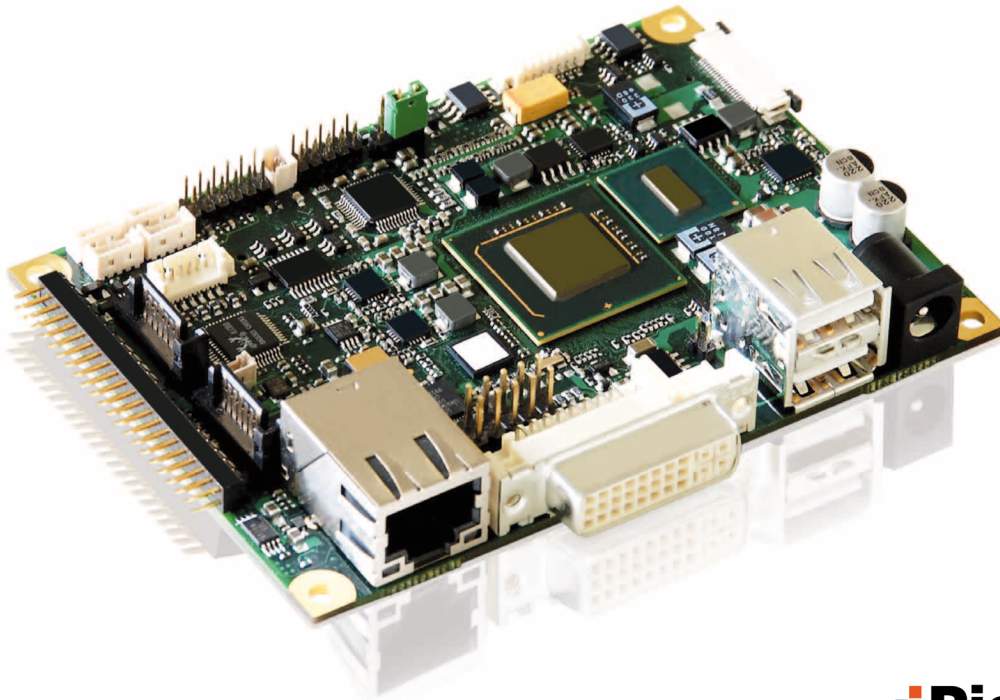

 **Pico™**



2.5" SBC with Intel® Atom™ CPU up to 1.6GHz on Pico-ITX™

- » Pico-ITX™ Small Form Factor 100 x 72 mm
- » Intel® Atom™ Z510 / Z530 processor
- » Intel® System Controller Hub US15W
- » Dual SATA, PATA44 and microSD support
- » Low power consumption with latest energy saving 45nm technology

Technical Information

Processor	Intel® Atom™ Z510 / Z530 1.1 / 1.6 GHz
Chipset	Intel® System Controller Hub US15W
Memory	1 x DDR2 SO-DIMM up to 2GB
Ethernet	Intel® 82574L Gigabit Ethernet
Graphics	DirectX 9.0e, OpenGL 2.0, Shader based 2D and 3D dual independent graphics
Graphics Controller	Integrated decoders in Intel® System Controller Hub US15W for MPG2 and H.264 / MPEG-4 AVC
Mass Storage	Single or Dual SATA II (chipset option) *, 1 x PATA 44 Master / Slave *
USB	6 x USB 2.0 (2 x at front panel, 4 x on board) *
Audio	HD Audio analog / SPDIF *
I/O Features	4 Bit GPIO/TTL *, SDIO *
Dimensions (H x W x D)	100 x 72mm (Pico-ITX)
Special Features	TPM 1.2 *, 1 x microSD socket *
Temperature	Operating 0°C - 60°C (32°F ~140°F) / Storage: tbd (Ask about extended temperature ranges)
Power Supply / Consumption	5V DC, 5W typical

* Optional, depending on product variants

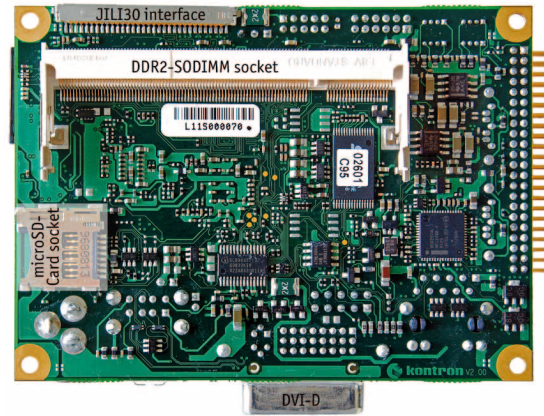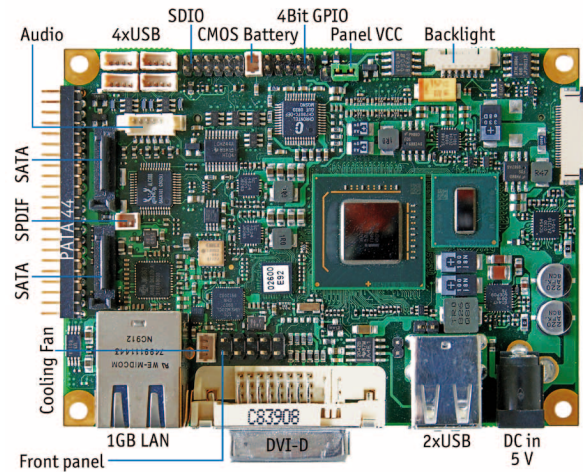

Ordering Information

Article	Part.-No.	Description
<i>pITX-SP 1.1 GHz standard</i>	03001-0000-11-2	pITX-SP 2.5" SBC, with Intel® Atom™ Z510 processor 1.1 GHz, SC HUB US15W, Dual SATA, 6 x USB, JILI30 LVDS Support, Backlight Support, HD Audio, 1 x DDR2 SO-DIMM socket, micro-SD-Support, 5V DC
<i>pITX-SP 1.1 GHz basic</i>	03001-0000-11-1	pITX-SP 2.5" SBC, with Intel® Atom™ Z510 processor 1.1 GHz, Sytem Controller HUB US15W, PATA 44, 2 x USB, HD Audio, 1 x DDR2 SO-DIMM socket, 5V DC
<i>pITX-SP 1.1 GHz plus Starterkit</i>	03101-0000-00-S1	Starterkit pITX-SP plus 1.1 GHz , 2.5" SBC, with Intel® Atom™ Z510 processor 1.1 GHz, SC HUB US15W, Dual SATA, PATA 44, 4 x USB, JILI30 LVDS Support, Backlight Support, HD Audio, GPIO, SDIO, TPM 1.2, 3D Orientation Sensor, 1 x DDR2 SO-DIMM socket, micro-SD-Support, 5V DC, incl. pITX-SP plus 1.1 GHz, 1GB DDR2 RAM, 5V power supply (20 W), cables & accessories, packed in plastic case
<i>pITX-SP 1.6 GHz plus</i>	03001-0000-16-0	pITX-SP 2.5" SBC, with Intel® Atom™ Z530 processor 1.6 GHz, Sytem Controller HUB US15W, Dual SATA, PATA 44, 6 x USB, JILI30 LVDS Support, Backlight Support, HD Audio, GPIO, SDIO, TPM 1.2, 1 x DDR2 SODIMM socket, micro-SD-Support, 5V DC
<i>pITX-SP 1.6 GHz standard</i>	03001-0000-16-2	pITX-SP 2.5" SBC, with Intel® Atom™ Z530 processor 1.6 GHz, SC HUB US15W, Dual SATA, 6 x USB, JILI30 LVDS Support, Backlight Support, HD Audio, 1 x DDR2 SO-DIMM socket, micro-SD-Support, 5V DC
<i>pITX-SP 1.6 GHz plus Starterkit</i>	03101-0000-00-S2	Starterkit pITX-SP plus 1.6 GHz (description of features above), incl. 2.5" SBC pITX-SP plus 1.6 GHz, 1GB DDR2 RAM, 5V power supply (20 W), cables & accessories, packed in plastic case

CORPORATE OFFICES

Europe, Middle East & Africa

Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany
Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 279
info@kontron.com

North America

14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: +1 888 294 4558
Fax: +1 858 677 0898
info@us.kontron.com

Asia Pacific

17 Building, Block #1, ABP,
188 Southern West 4th Ring Road
Beijing 100070, P.R.China
Tel.: + 86 10 63751188
Fax: + 86 10 83682438
info@kontron.cn



#pITX-SP 04162010PDI
All data is for information purposes only and not guaranteed for legal purposes. Subject to change without notice. Information in this datasheet has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. All brand or product names are trademarks or registered trademarks of their respective owners.