


PRODUCT NO.  
10026021-120CA/120CALF

- NOTES:
- EJECT FORCE : 3.5 Kg MAX.
  - EJECT TRAVEL: 8.0mm
  - MATERIAL
  - 3.1 HEADER ASS'Y :  
PLASTIC : HOUSING ...LCP UL94V-0 NATURAL  
PIN : COPPER ALLOY
  - 3.2 EJECT MECHANISM ASS'Y :  
PLASTIC : GUIDE: POLYPHTHARAMID UL94V-0 BLACK  
PUSH ROD: POLYPHTHARAMID UL94V-0 BLACK  
PLATE : STAINLESS  
EMI CONTACT: PHOSPHOR BRONZE
  4. FINISH (PIN)  
UNDER PLATING : 0.5µm MIN. Ni  
CONTACT AREA : 0.1µm MIN. GOLD OVER 0.5µm MIN. Pd-Ni  
SOLDER TAIL (TIN LEAD OPTION): 2.5µm MIN. Sn-Pb  
SOLDER TAIL (LEAD FREE OPTION): 2.5µm MIN. PURE TIN

4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68

6. CHECK THE DIMENSION AFTER PUSHING BUTTON (X) FULLY TO END.
- IF LEAD FREE P/N, THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
  - LEAD FREE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DISCRIBED IN GS-22-008
  - IF LEAD FREE P/N, PACKAGING MEETS GS-14-920 SPECIFICATION

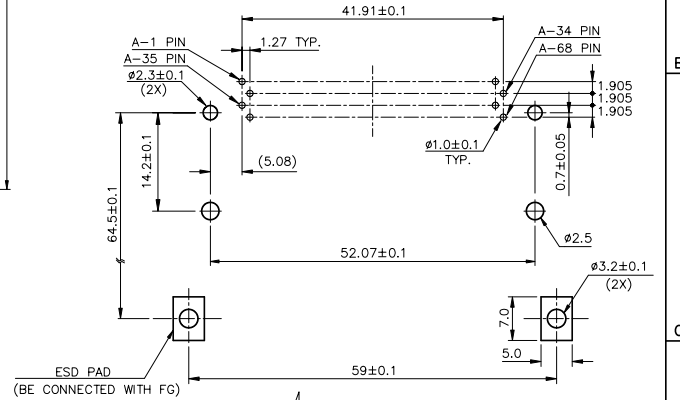

4 CARD INSERTION DIRECTION

mat'l code		tolerance unless otherwise specified		CUSTOMER COPY		FCI		www.fciconnect.com	
rev.	ecn no.	dr	date	linear	± 0.3	projection	title PCMCIA R/A EJECTOR		
A	T03-0134	W L	04/22/03	angles	± 2°	unit	code		
B	N04-0105	W B	11/28/04	dr	WENDY CHEN 03/18/03	mm/inch	product family		pack
				enrg	SPANCER LAI 03/18/03	scale	size		dwg no.
				chr	SCOTT LU 03/18/03	1.5:1	A3		10026021
				appd	JENN TSAO 03/18/03	code		TWN	
sheet	revision	B				size		1 OF 1	
index	sheet	1				sheet		1 OF 1	

PDM: Rev:B STATUS Released Printed: Oct 12, 2010

Tous droits attachement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.

All rights strictly reserved. Reproduction or issue to third parties in any form without written authority from the proprietor.



Copyright BERG ELECTRONICS BV

