


Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Property of ©BERG ELECTRONICS. Copyright BERG ELECTRONICS INC.

PRODUCT NO.	(A) HEADER ASSM.	(B) EJECT MECHANISM
98533-502CA	73625-20320	92192-10CA

PIN NUMBER	DIM X PIN LENGTH
36,67	3.5±0.1
1,17,34 35,51,68	5.0±0.1
ALL OTHERS	4.25±0.1

PIN ASSIGNMENTS

J-1	J-2	J-1	J-2
	1 NC		
1	2	35	36
2	3	36	37
3	4	37	38
4	5	38	39
5	6	39	40
6	7	40	41
7	8	41	42
8	9	42	43
9	10	43	44
10	11	44	45
11	12	45	46
12	13	46	47
13	14	47	48
14	15	48	49
15	16	49	50
16	17	50	51
17	18	51	52
18	19	52	53
19	20	53	54
20	21	54	55
21	22	55	56
22	23	56	57
23	24	57	58
24	25	58	59
25	26	59	60
26	27	60	61
27	28	61	62
28	29	62	63
29	30	63	64
30	31	64	65
31	32	65	66
32	33	66	67
33	34	67	68
34	35	68	69

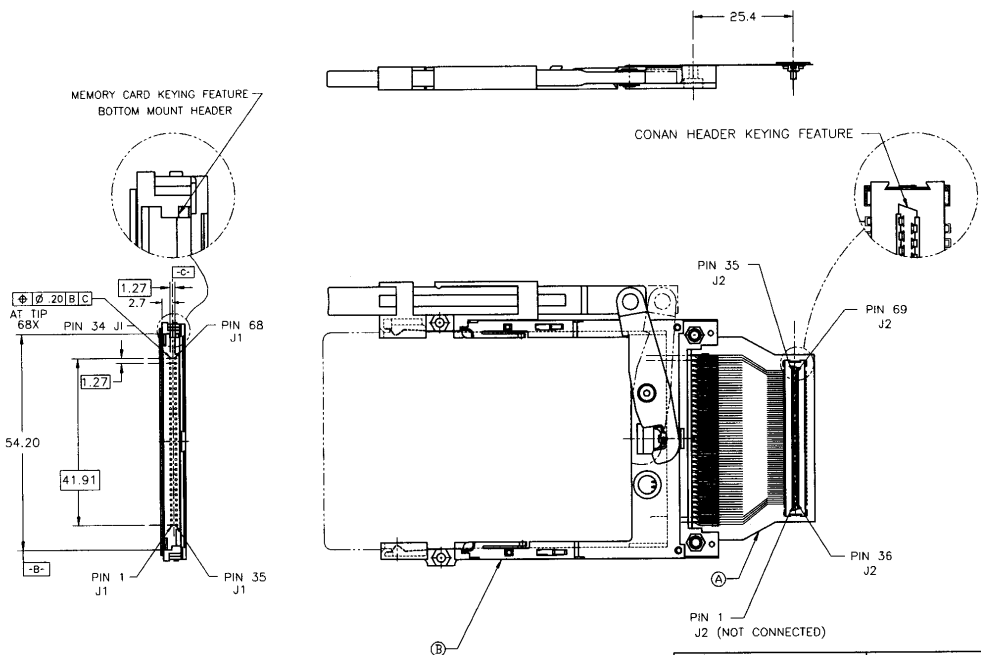

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		<b>BERG ELECTRONICS</b>	
ltr	ecr no	dr	date	linear	.X ±.3	projection	title	product family	code
A	V91592	CGC	8/3/99	angles	.XX ±.13		PCMCIA TO CONAN FLEX ASSEMBLY	MCS	-
					.XXX ±.051			scale	size
				dr	0° ±2'	1:1	A4	98533	1 of 2
				engr	G.CLEMENS 8/3/99				
				chr	D.BRANN 8/3/99				
				appd	D.BRANN 8/3/99				
sheet index	revision sheet	A 1	A 2						



form no. 7530-001-103

page code 22526

PDM: Rev:A STATUS:Released Printed: Oct 12, 2010

Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de © BERG ELECTRONICS. Droits de reproduction BERG ELECTRONICS INC.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of © BERG ELECTRONICS. Copyright BERG ELECTRONICS INC.

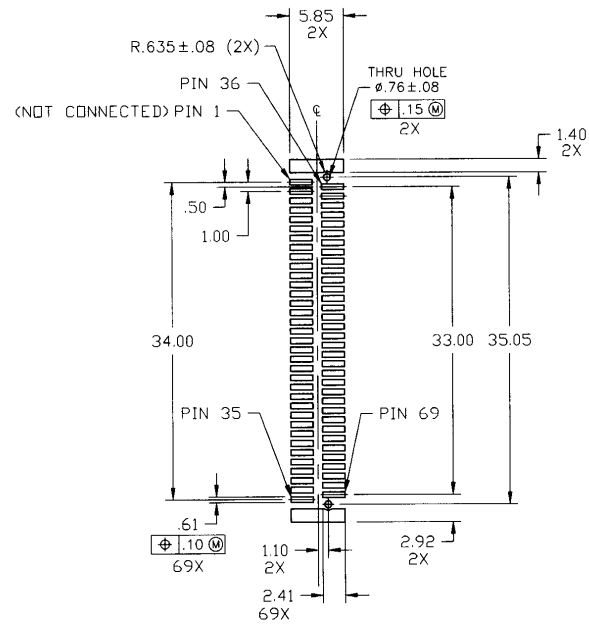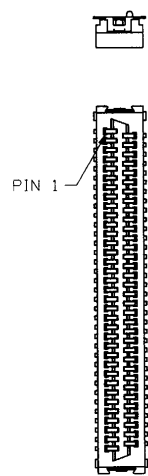

NOTES:

- RECOMMENDED MATING CONNECTOR:  
CONAN RECEPTACLE P/N 91930-21169
- PCMCIA HEADER:  
MATERIAL: PLASTIC - LCP  
PIN - PHOSPHOR BRONZE  
SEE DRAWING 91900 FOR ADDITIONAL INFORMATION  
PLATING: UNDERPLATING: 0.5 um Ni  
CONTACT AREA: 0.1 um Au  
OVER 0.5 um Pd-Ni
- CONAN HEADER:  
MATERIAL: PLASTIC - LCP  
PIN - PHOSPHOR BRONZE  
SEE DRAWING 91900 FOR ADDITIONAL INFORMATION  
PLATING: UNDERPLATING: 1.27 um Ni  
CONTACT AREA: .38 um GXT
- EJECT MECHANISM ASSY:  
MATERIAL: PLASTIC GUIDE: POLYPHTHARAMID UL94V-0 BLACK  
PLASTIC PUSH ROD BUTTON: POLYPHTHARAMID UL94V-0 BLACK  
COVER PLATE, EJECT PLATE, LINK ARM, PUSH ROD: STAINLESS STEEL  
EMI CONTACT: PHOSPHOR BRONZE
- RECOMMENDED SCREW TORQUE:  
1.0 TO 1.5 MAX IN-LBS (1.2-1.7cm.-kgs).

RECOMMENDED  
CONAN RECEPTACLE  
P/N 91930-21169

RECOMMENDED  
PAD REQUIREMENT  
FOR CONAN RECEPTACLE (J2)

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		<b>BERG ELECTRONICS</b>	
ltr	ecn no	dr	date	linear	projection	title	
A				.X ± .3		PCMCIA TO CONAN FLEX ASSEMBLY	
				.XX ± .13		product family	MCS
				.XXX ± .051		size	
				0° ± 2°		A4	98533
				angles	scale	code	
				dr	1:1	22526	
				enrg	G.CLEMENS 8/3/99	form no. 7530-001-103	
				chr	D.BRANN 8/3/99	PDM: Rev:A STATUS:Released Printed: Oct 12, 2010	
				appd	D.BRANN 8/3/99		
sheet index	revision sheet						