


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.


REVISIONS		DOC. NO.	SPC-F005	Effective:	12/21/98	DCP No.	880	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKED	DATE	APPRVD	DATE
492	A	Released	SAS	08/18/99	JC	07/20/99	DJC	07/28/99
1012	B	Drawing Corrected	JWM	8/22/00	JC	8/22/00	JC	8/22/00

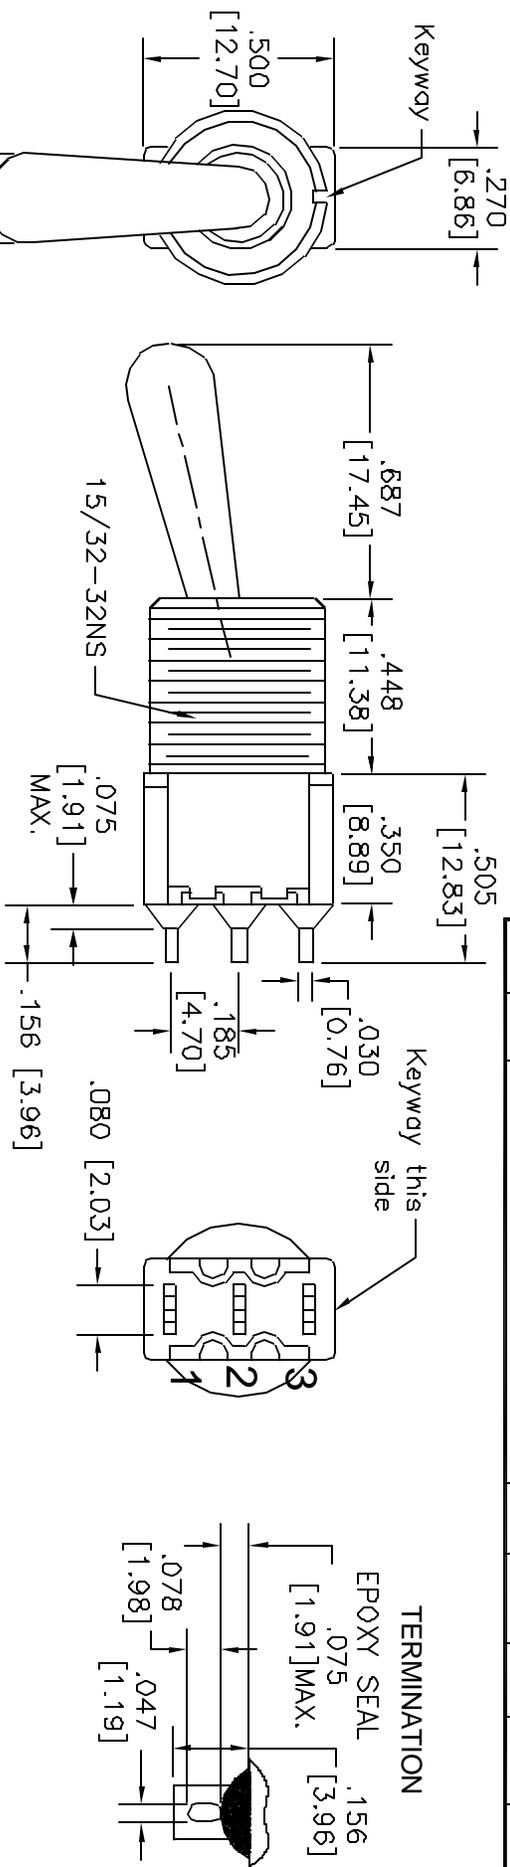


SPECIFICATIONS:

Contact Rating: 5A with resistive load @ 120 VAC or 28 VDC
 2A with resistive load @ 250 VAC
 Electrical Life: 50,000 make-and-break cycles at full load
 Contact Resistance: 10 milliohm max. initial @2-4 VDC 100 milliamp for both coin silver and gold plated contacts.
 Insulation Resistance: 1,000 Megohms min.
 Dielectric Strength: 1,000 V RMS @ sea level
 Operating Temperature: -30°C to 85°C

MATERIALS:
 Case: Melamine or diallyl phthalate (DAP)
 Toggle Handle: Brass, Chrome Plated
 Bushing: Brass, Nickel Plated
 Housing: Stainless Steel
 End Contact: Coin Silver, Silver Plated
 End Terminal: Brass, Silver Plated
 Center Contact & Terminal: Brass, Silver Plated
 Epoxy Sealed Terminals
 Includes: Hex Nut, Lock Washer & Locking Ring

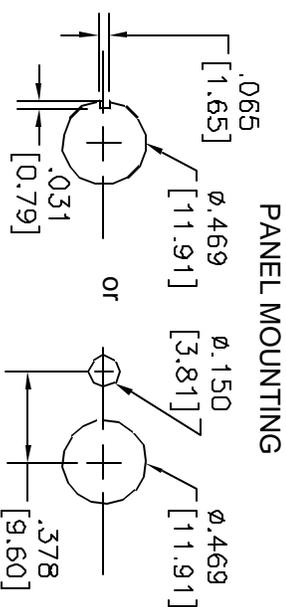

PANEL MOUNTING

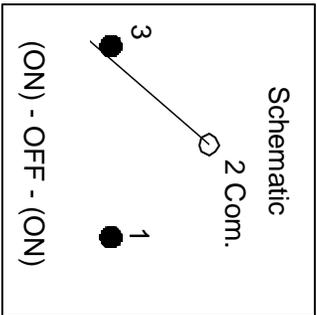

Schematic

2 Com.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
SCOTT SERRITELLA	06/16/99
CHECKED BY:	DATE:
JOHN COLE	07/20/99
APPROVED BY:	DATE:
DANIEL CAREY	07/28/99

SPC TECHNOLOGY

DRAWING TITLE: Toggle Switch - SPDT

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC4961	50N288.dwg	B
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1