


CM3322P400R-10

PHYSICAL DIMENSIONS:

A	8.50 [.335]	± 0.25 [.010]
B	5.60 [.220]	± 0.25 [.010]
C	2.10 [.083]	± 0.25 [.010]
D	2.24 [.088]	± 0.23 [.009]
E	0.58 [.023]	± 0.18 [.007]

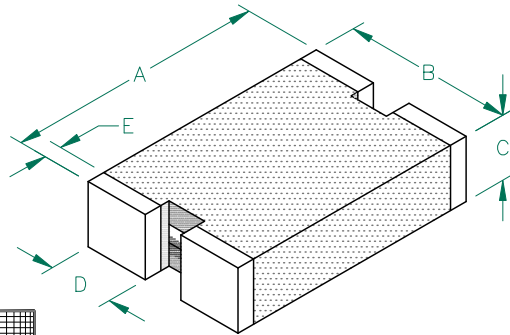

ELECTRICAL CHARACTERISTICS:


Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	40	
Minimum	30	
Maximum	50	4,000 mA

NOTES: UNLESS OTHERWISE SPECIFIED


1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 2500 PCS/REEL.
2. TERMINATION FINISH IS 100% TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
4. U.S. PATENT 6,288,626 SHOULD APPEAR ON THE LABEL OF EACH REEL OF PACKAGED PARTS.

OBsolete


Z vs. FREQUENCY (C,N,O)

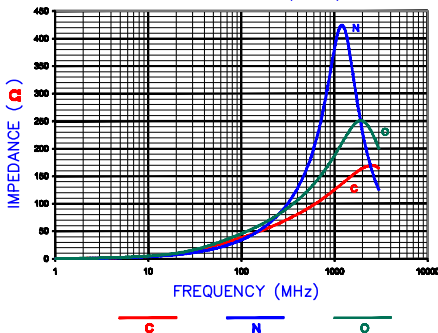

Z, R, XL vs. FREQUENCY

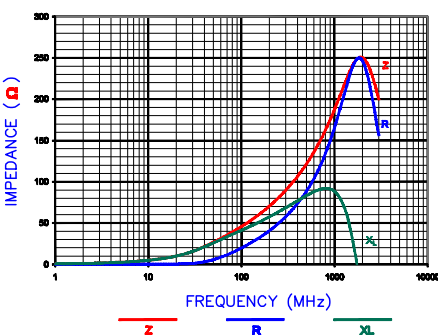


LAND PATTERNS FOR REFLOW SOLDERING

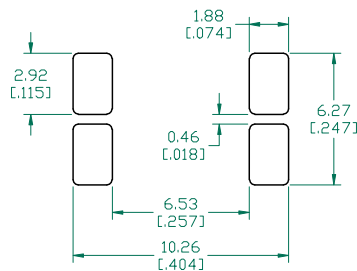

(For wave soldering, add 0.762 [0.030] to this dimension.)

RECOMMENDED SOLDERING CONDITIONS

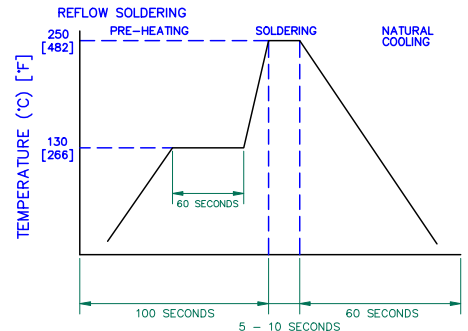

DIMENSIONS ARE IN mm [INCHES].

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.

Steward

PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
CM3322P400R-10	A	CO-FIRE	TMB
DATE:	SCALE:	SHEET:	
03/29/04	NTS	2 of 2	
DRAWN BY:	DATE:	INT:	
TMB	03/29/04		
DESCRIPTION:	DATE:	INT:	
CM3322P400R-10-A			