

KVR100X64SC3/128 100MHz SDRAM 144-Pin SODIMM Memory Module

DESCRIPTION:

This document describes ValueRAM's CL3 16M x 64-bit (128MB) SDRAM (Synchronous DRAM) PC100 Small Outline DIMM memory module. The components on this module include eight 8M x 16-bit (2M x 16-bit x 4 Bank / PC100 components) 4K Refresh SDRAM in TSOP packages. This 144-pin SODIMM uses gold contact fingers and requires +3.3V. The electrical and mechanical specifications are as follows:

FEATURES:

- | | | |
|---|------------------------|---|
| ✓ | CLK Cycle Time (tCC) | min. = 10ns (CAS Latency = 3/ max. = 1000ns |
| ✓ | Row Cycle Time (tRC) | 70ns |
| ✓ | CLK to Output (tSAC) | max. = 6ns (CAS Latency = 3) |
| ✓ | Single Power Supply of | +3.3V (+/- .3V) |
| ✓ | Power | 2.244 W (operating) |
| ✓ | UL Rating | 94 V - 0 |

Note: The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.250" (31.75mm).

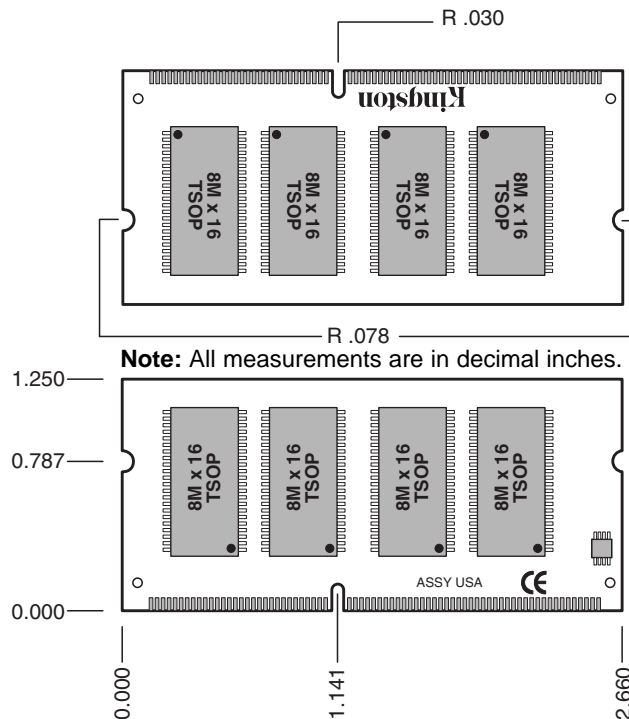


Figure 1: KVR100X64SC3/128 128MB 144-Pin SDRAM Module