


EVERLIGHT

0.400-INCH SEVEN SEGMENT DISPLAYS

HIGH EFFICIENCY GREEN **MAN4400A SERIES** ORANGE **MAN4600A SERIES** RED **MAN4700A SERIES**

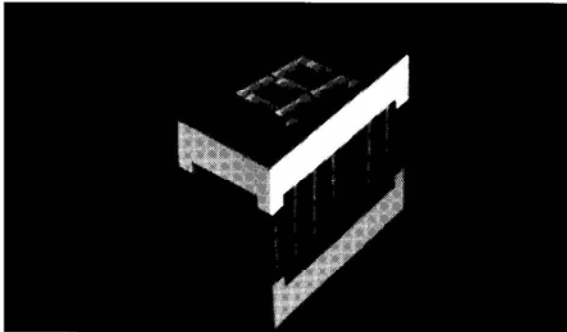

DESCRIPTION

The MAN4400, MAN4600, MAN4700 and MAN4800 Series provides superior brightness in a choice of color LED displays. Standard units are available in Red, Green, and Orange. They can be mounted in arrays with 0.400-inch (10.16 mm) center-to-center spacing. The Green displays are constructed with Grey face and neutral segment color. Red displays have Black faces and Red segment color. Others have face and segment color corresponding to the emitted light.

FEATURES

- Common anode or common cathode models
- Red, Green and Orange
- Fast switching—excellent for multiplexing
- Low power consumption
- Bold solid segments that are highly legible
- Solid state reliability—long operation life
- Impact resistant plastic construction
- Directly compatible with integrated circuits
- High brightness with high contrast
- Categorized for Luminous Intensity (See Note 6)
- Standard 14 pin dual-in-line package configuration
- Wide angle viewing . . . 150°
- Package size and lead configuration is the same as MAN50A/3600A/70A/80A Series

APPLICATIONS

For industrial and consumer applications such as:

- Digital readout displays
- Instrument panels
- Point of sale equipment
- Calculators
- Digital clocks
- High ambient light conditions

MODEL NUMBERS

PART NUMBER	COLOR	DESCRIPTION	PACKAGE DRAWING	PIN OUT SPECIFICATION
MAN4410A	Green	Common Anode; Right Hand Decimal	A	A
MAN4440A	Green	Common Cathode; Right Hand Decimal	A	C
MAN4610A	Orange	Common Anode; Right Hand Decimal	A	A
MAN4630A	Orange	Common Anode; Overflow ± 1 ; Right Hand Decimal	B	B
MAN4640A	Orange	Common Cathode; Right Hand Decimal	A	C
MAN4705A	Red	Universal (CA or CC) Overflow ± 1 ; Right Hand Decimal	B	D
MAN4710A	Red	Common Anode; Right Hand Decimal	A	A
MAN4740A	Red	Common Cathode; Right Hand Decimal	A	C



0.400-INCH SEVEN SEGMENT DISPLAYS

RECOMMENDED OPTICAL FILTER			
For optimum ON and OFF contrast, one of the following filters or equivalents should be used over the display:			
DEVICE TYPE	FILTER	DEVICE TYPE	FILTER
MAN4410A } MAN4440A }	Panelgraphic Green 48	MAN4705A } MAN4710A } MAN4740A }	Panelgraphic Red 60 Homalite 100-1605
MAN4610A } MAN4630A } MAN4640A }	Panelgraphic Scarlet 65 Homalite 100-1670		
NOTE: When using the Grey face MAN4480 or MAN4880 in situations of high ambient light, a neutral density filter can be used to achieve a greater contrast. The following or equivalent can be used: Panelgraphic Grey 10.			

ELECTRO-OPTICAL CHARACTERISTICS (25°C Free Air Temperature Unless Otherwise Specified)					
	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
MAN4410A/4440A					
Luminous Intensity, digit average (See Note 1 and 3)	750	3200		μ cd	$I_f = 10$ mA
Peak emission wavelength		562		nm	
Forward voltage					
Segment		2.2	3.0	V	$I_f = 20$ mA
Decimal point		2.2	3.0	V	$I_f = 20$ mA
Dynamic resistance					
Segment		12		Ω	$I_f = 20$ mA
Decimal point		12		Ω	$I_f = 20$ mA
Capacitance					
Segment		40		pF	V=0
Decimal point		40		pF	V=0
Reverse current					
Segment			100	μ A	$V_r = 5.0$ V
Decimal point			100	μ A	$V_r = 5.0$ V
MAN4610A/4630A/4640A					
Luminous Intensity, digit average (See Note 1 and 3)	510	1800		μ cd	$I_f = 10$ mA
Peak emission wavelength		630		nm	
Forward voltage					
Segment		2.2	2.5	V	$I_f = 20$ mA
Decimal point		2.2	2.5	V	$I_f = 20$ mA
Dynamic resistance					
Segment		26		Ω	$I_f = 20$ mA
Decimal point		26		Ω	$I_f = 20$ mA
Capacitance					
Segment		35		pF	V=0
Decimal point		35		pF	V=0
Reverse current					
Segment			100	μ A	$V_r = 5.0$ V
Decimal point			100	μ A	$V_r = 5.0$ V



0.400-INCH SEVEN SEGMENT DISPLAYS

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

