

# Technical Data Sheet

## Photo-link Light Transmitter Unit

**PLT132**


### Features

- High speed signal transmission ( 16Mbps NRZ Signal )
- TTL interface compatible
- +3~+5V single power source
- Pb Free
- The product itself will remain within RoHS compliant version.

### Descriptions

The opto-electrical component is assembled with a 660nm AlGaInP LED and a driver IC. It transforms the electrical signal to optical signal and be transmitted by 1mm diameter plastic optical fiber.

The component is operated at +3~+5V and has good performance at low dissipation current, steady light output and efficient light coupling.

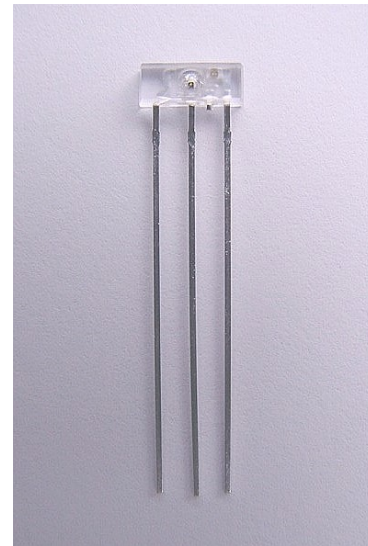


### Applications

- Digital audio equipment
- CD player
- DVD player

### Device Selection Guide

Chip		Operating Voltage (Vcc)	Dissipation Current (mA)		Fiber Coupling Light Output (dBm)		
Material	$\lambda$ p(nm)		Typ.	Max.	Min.	Typ.	Max.
AlGaInP	660	+3.0~5.0	5.5	10	-21	--	-15

**Package Dimension:**

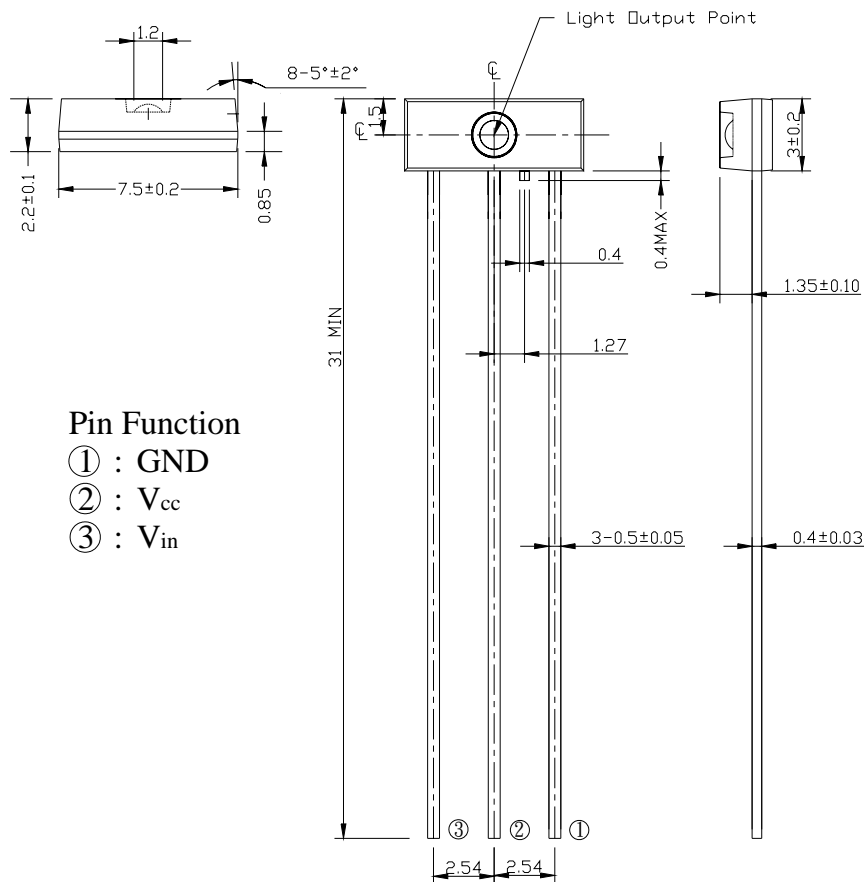

**Pin Function**

- ① : GND
- ② : V<sub>cc</sub>
- ③ : V<sub>in</sub>

- Notes:** 1.All dimensions are in mm.  
 2.General Tolerance: Pin length tolerance is ±0.25 mm  
 others are ±0.10 mm

\*Circuit Layout Notice: When power is off, it must be cut off together in V<sub>in</sub> and V<sub>cc</sub> pin.  
 If it only has V<sub>cc</sub> power-off, LED will sure to be no output power.

V <sub>cc</sub>	V <sub>in</sub>	LED Condition
2.7~5.5V	High	ON
2.7~5.5V	Low	OFF
2.7~5.5V	FLOATING	OFF
FLOATING	0~V <sub>cc</sub>	OFF

**Absolute Maximum Ratings( Ta = 25°C)**

Parameter	Symbol	Rating	Unit
Supply Voltage	Vcc	-0.5 to 7	V
DC Input Voltage	Vin	-0.5 to Vcc+0.5	V
Storage Temperature	Tstg	-40 to 85	°C
Operating Temperature	Topr	-20 to 70	°C
Soldering Temperature	Tsol	260*	°C

\* Soldering time ≤ 10 s.


**Electro-Optical Characteristics**

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Operating Voltage	Vcc	Low Voltage	2.75	3.00	3.25	V
		High Voltage	4.75	5.00	5.25	V
Peak Emission Wavelength	$\lambda_p$		640	660	680	nm
Transmission Rate		NRZ Code	DC	-	16	Mbps
Fiber Coupling Output Power	Pf	*1	-21	-18	-15	dBm
Dissipation Current	Icc	*1	3	-	10	mA
High Level Input Voltage	V <sub>IH</sub>		2	-	-	V
Low Level Input Voltage	V <sub>IL</sub>		-	-	0.8	V
Rise Time of LED Signal	t <sub>r</sub>	*2 NRZ Code V <sub>FLED</sub> = 2.0V	-	-	20	ns
Fall Time of LED Signal	t <sub>f</sub>		-	-	20	ns
Low to High Delay Time	t <sub>pLH</sub>	*2	-	-	100	ns
High to Low Delay Time	t <sub>pHL</sub>	*2	-	-	100	ns
Pulse Width Distortion	$\Delta tw$	*2	-25	-	25	ns
Jitter	$\Delta tj$	*2	-	-	20	ns


\*All Plastic Optical Fiber ( 980/1000um )

**Measuring Method**

\*1 Measuring method of optical output coupling fiber and dissipation current

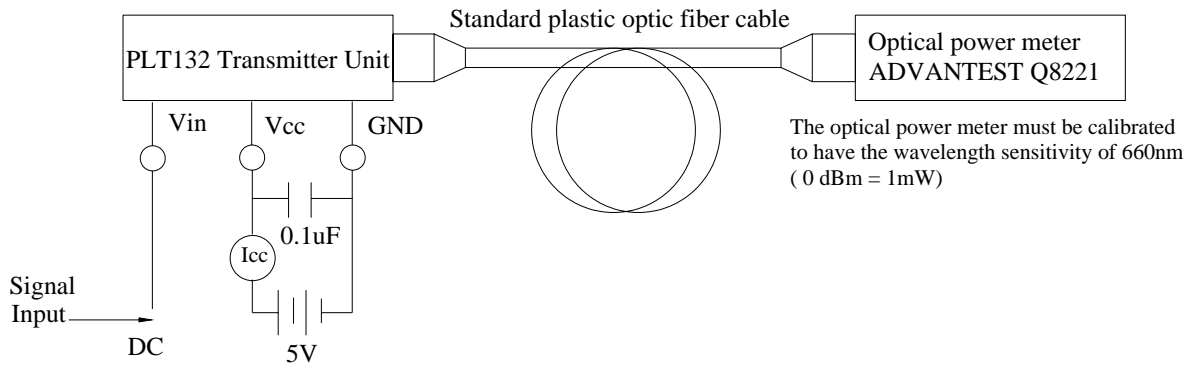

\*2 Pulse response measuring method

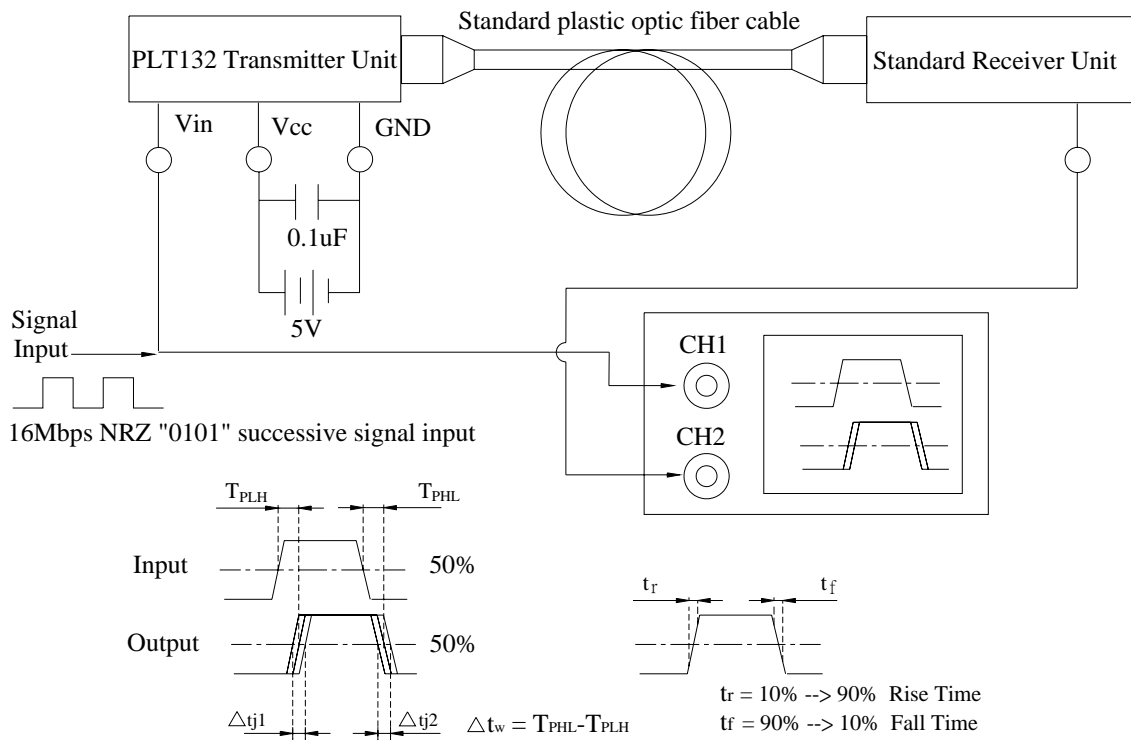

**RELIABILITY TEST ITEMS**

No.	Item	Test Condition	Test Hour/Cycle	Sample Size (piece)	Number (n) Failure (c)
1	Soldering Heat	260°C±5°C	10 seconds	22	n=22, c=0
2	High Temp. Storage	Ta=100°C	1000	22	n=22, c=0
3	Low Temp. Storage	Ta=-40°C	1000	22	n=22, c=0
4	High Temp.& Humi. Test	Ta=85°C, RH=85%	1000	22	n=22, c=0
5	Temperature Cycle	-40°C ~~~~ 85°C (30min) (5min) (30min)	100	76	n=76, c=0
6	Thermal Shock	-10°C ~~~~ 85°C (5min) (10sec) (5min)	100	76	n=76, c=0
7	DC Operating Life	Vcc=5V, Ta=25°C Vin: DC (5V)	1000	22	n=22, c=0

I<sub>cc</sub> : DISSIPATION CURRENT DIFFERENCE < 20%

P<sub>f</sub> (Fiber Coupling Output Power) : BRIGHTNESS ATTENUATE DIFFERENCE < 20%

**EVERLIGHT ELECTRONICS CO., LTD.**  
Office: No 25, Lane 76, Sec 3, Chung Yang Rd,  
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936  
Fax: 886-2267-6244, 2267-6189, 2267-6306  
<http://www.everlight.com>