




**PACKAGE DIMENSIONS**

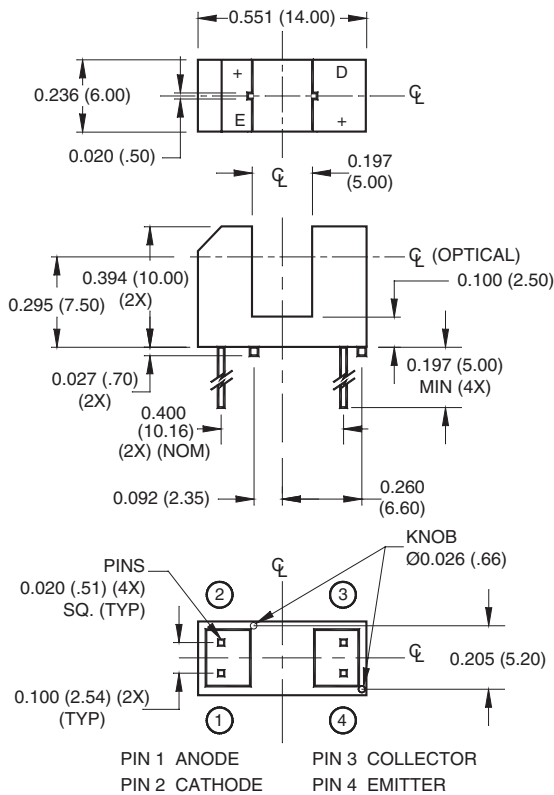

**FEATURES**

- No contact switching
- 5mm wide slot
- 0.5 mm aperture width
- Opaque black plastic housing
- Locating knobs on housing base for accurate mounting
- Transistor Output

**SCHEMATIC**



**NOTES:**

1. Dimensions for all drawings are in inches (millimeters).
2. Tolerance of  $\pm .010$  (.25) on all non-nominal dimensions unless otherwise specified.

**NOTES**

1. Derate power dissipation linearly 1.67 mW/°C above 25°C.
2. RMA flux is recommended.
3. Methanol or isopropyl alcohols are recommended as cleaning agents.
4. Soldering iron tip 1/16" (1.6mm) from housing.


**ABSOLUTE MAXIMUM RATINGS** ( $T_A = 25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Rating	Units
Operating Temperature	TOPR	-55 to +100	°C
Storage Temperature	TSTG	-55 to +100	°C
Soldering Temperature (Iron)(2,3,4)	TSOL-I	240 for 5 sec	°C
Soldering Temperature (Flow)(2,3)	TSOL-F	260 for 10 sec	°C
<b>EMITTER</b>			
Continuous Forward Current	IF	60	mA
Reverse Voltage	VR	6	V
Power Dissipation(1)	PD	150	mW
<b>SENSOR</b>			
Collector-Emitter Voltage	VCEO	30	V
Emitter-Collector Voltage	VECO	4.5	V
Collector Current	IC	20	mA
Power Dissipation(1)	PD	150	mW


**ELECTRICAL / OPTICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$ )

PARAMETER	TEST CONDITIONS	SYMBOL	MIN	TYP	MAX	UNITS
<b>EMITTER</b>						
Forward Voltage	$I_F = 20\text{ mA}$	$V_F$	—	1.2	1.5	V
Reverse Current	$V_R = 4\text{ V}$	$I_R$	—	—	10	$\mu\text{A}$
Peak Emission Wavelength	$I_F = 20\text{ mA}$	$\lambda_{PE}$	—	940	—	nm
<b>SENSOR</b>						
Dark Current	$V_{CE} = 10\text{ V}, I_F = 0\text{ mA}$	$I_D$	—	—	200	nA
<b>COUPLED</b>						
Collector Current	$I_F = 20\text{ mA}, V_{CE} = 10\text{ V}$	$I_{C(ON)}$	0.5	—	14	mA
Collector Emitter Saturation Voltage	$I_F = 20\text{ mA}, I_C = 0.1\text{ mA}$	$V_{CE(SAT)}$	—	—	0.4	V
Rise Time	$V_{CC} = 5\text{ V}, R_L = 100\ \Omega$	$t_r$	—	4	—	$\mu\text{s}$
Fall Time	$I_C = 5\text{ mA}$	$t_f$	—	4	—	$\mu\text{s}$


**TYPICAL PERFORMANCE CURVES**

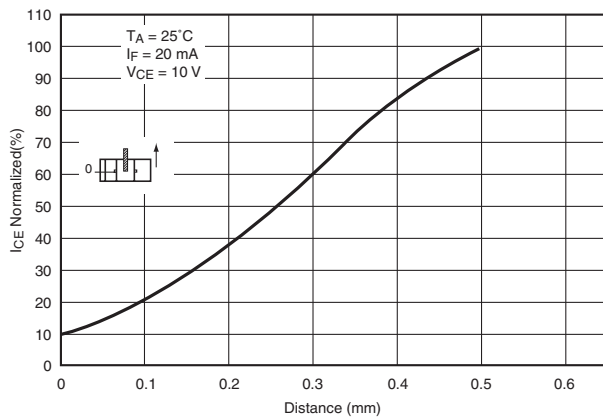


**Fig. 1 Collector Current vs. Shield distance**

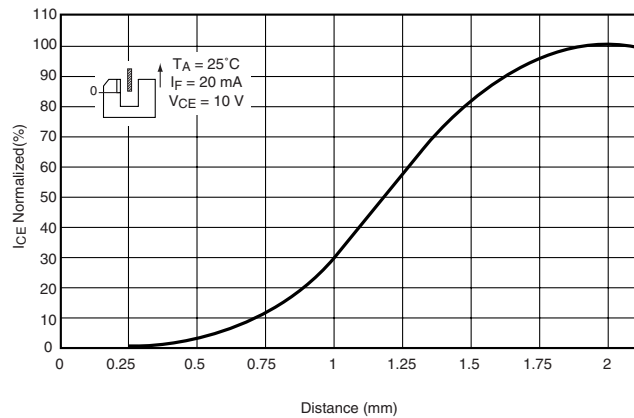


**Fig. 2 Collector Current vs. Shield distance**

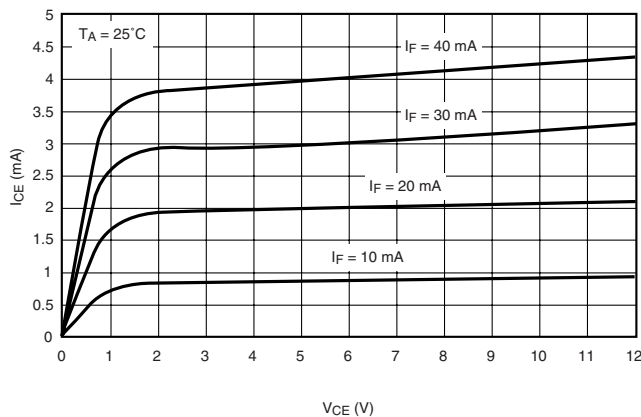


**Fig. 3 Collector-Emitter Voltage vs. Collector Current**

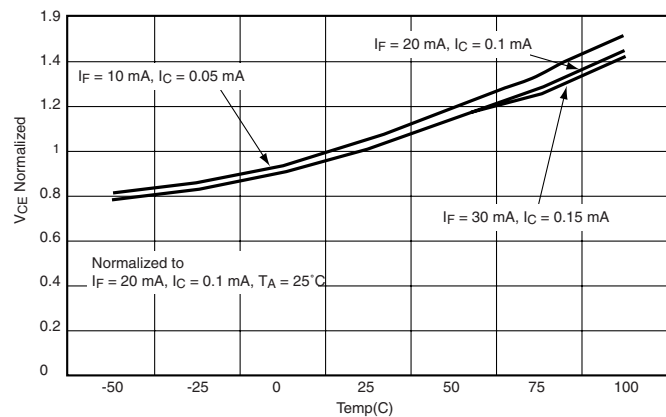


**Fig. 4 Collector-Emitter Voltage vs. Temperature**

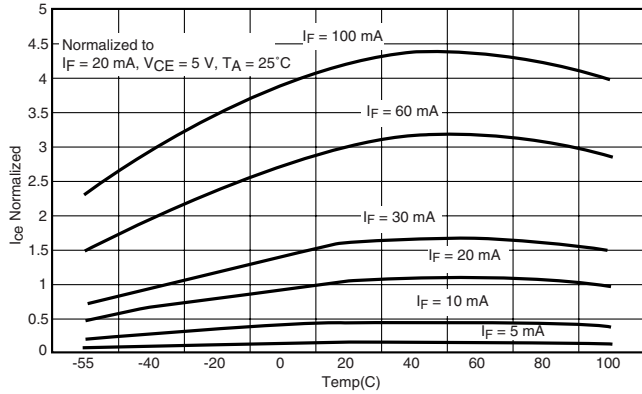


**Fig. 5 Collector Current vs. Temperature**

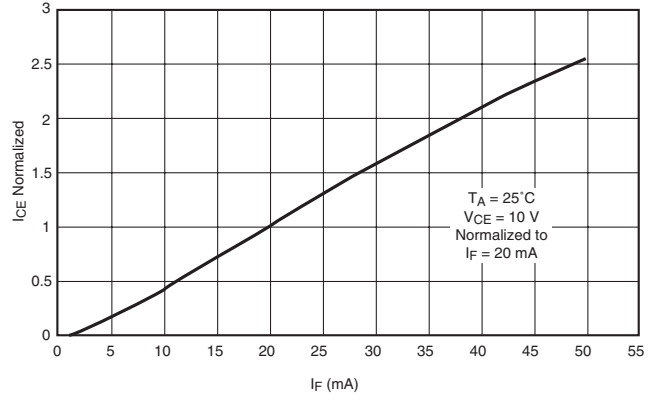


**Fig. 6 Collector Current vs. Forward Current**

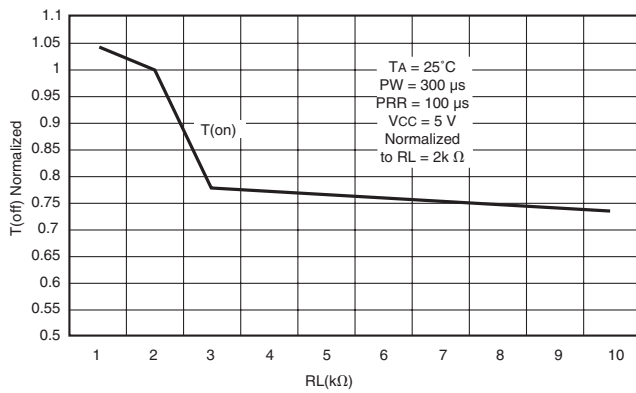

**Fig. 7 Rise Time vs. Load Resistance**

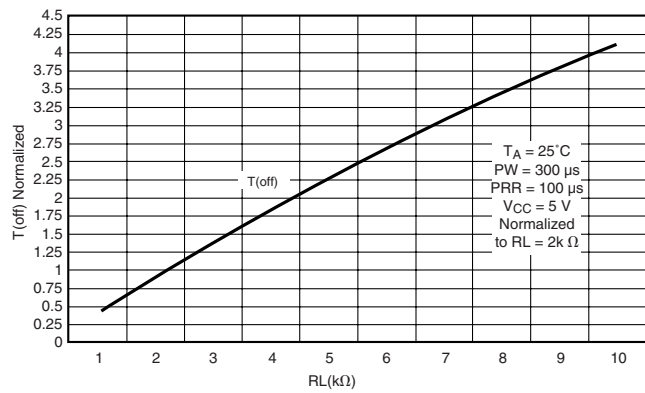

**Fig. 8 Fall Time vs. Load Resistance**

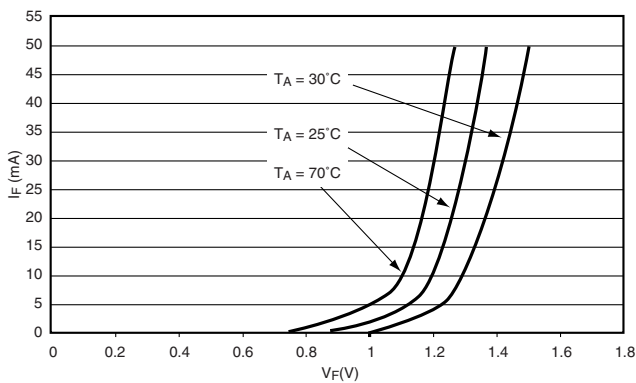

**Fig. 9 Forward Voltage vs. Forward Current**

**DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- 
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.