

File E61760(N)

59065 and 59070 Threaded Barrel Features and Benefits



Features

- 2 part magnetically operated proximity sensor
- Threaded barrel with retaining nuts
- Available as M8 (57070/59070) or 5/16 (57065/59065) size options
- 305mm (12") lead outs


Benefits

- Simple installation and adjustment using supplied retaining nuts
- No standby power requirement
- Operates through non-ferrous materials such as wood, plastic or aluminium
- Hermetically sealed, magnetically operated contacts continue to operate long after optical and other technologies fail due to contamination
- Simple installation and adjustment


Applications

- Position and limit sensing
- Security system switch
- Linear actuators
- Industrial process control

DIMENSIONS (in) mm

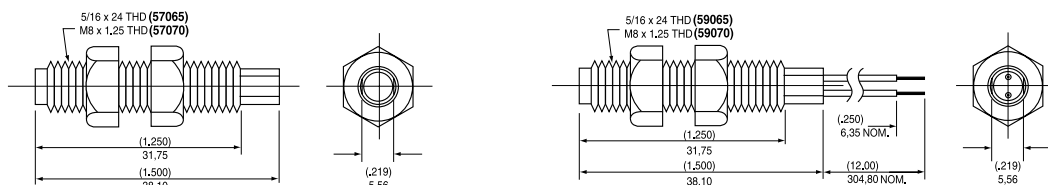

Recommended Activating Positions:



| Sensors and Matching Actuators (Note 2) | | Actuator | Sensor | | | |
|---|--------------|-----------|-----------|-----------|-----------|-----------|
| Must Actuate | Must Release | | | | | |
| (.150) 3,81 | (.800) 20,32 | 57065-000 | 59065-010 | 59065-020 | 59065-030 | 59065-040 |
| (.150) 3,81 | (.800) 20,32 | 57070-000 | 59070-010 | 59070-020 | 59070-030 | 59070-040 |

| Electrical Specifications and Operating Characteristics | | | Form A SPST-NO Standard | Form A SPST-NO High Voltage | Form C SPDT-CO Standard | Form B SPST-NC Standard |
|---|------------------|-----------------|-------------------------------|-----------------------------------|-------------------------------|-------------------------------|
| Contact Type | | | | | | |
| Contact Rating | | Watt - max. | 10 | 10 | 5 | 5 |
| Voltage | Switching | Vdc - max. | 200 | 300 | 175 | 175 |
| | Breakdown | Vdc - min. | 250 | 450 | 200 | 200 |
| Current | Switching | A - max. | 0.5 | 0.5 | 0.25 | 0.25 |
| | Carry | A - max. | 1.2 | 1.5 | 1.5 | 1.5 |
| Resistance | Contact, Initial | Ω - max. | 0.2 | 0.2 | 0.2 | 0.2 |
| | Insulation | Ω - min. | 10 ⁹ | 10 ⁹ | 10 ⁹ | 10 ⁹ |
| Capacitance | Contact | p F - typ. | 0.3 | 0.2 | 0.3 | 0.3 |
| Temperature | Operating | °C | -40 to + 105 | -20 to + 105 | -40 to + 105 | -40 to + 105 |
| | Storage | °C | -65 to + 105 | -65 to + 105 | -65 to + 105 | -65 to + 105 |
| Time | Operate | ms - typ. | 1.0 | 1.0 | 1.0 | 1.0 |
| | Release | ms - typ. | 1.0 | 1.0 | 1.0 | 1.0 |
| Shock | 11ms 1/2 sine | G - max. | 100 | 100 | 50 | 50 |
| Vibration | 50-2000 Hz | G - max. | 30 | 30 | 30 | 30 |

- Notes: 1. Flying Leads are 24 AWG 7/32 PVC, 105 deg. C., UL 1569. Leads are stripped (.250) 6,35, untinned.
 2. Order Actuators as a separate item.
 3. Underwriters Laboratories recognition. For details on electrical specifications, contact Hamlin.

INFORMATION PROVIDED ON THIS DATA SHEET IS PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.

USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales@hamlin.com
UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: uksales@breedtech.com
Germany Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 953666 • Email: hamlin-electronics.de@breedtech.com
France Tel: +33 1 46 87 02 02 • Fax: +33 1 46 86 67 86 • Email: hamectrol@hamectrol.fr

ISSUE No: 3 DATE: 28/09/01 SIGNED: Antony Howell