

Single Phase Rectifier Bridge


in ECO-PAC 2

$$I_{dAV} = 78 \text{ A}$$

$$V_{RRM} = 800-1600 \text{ V}$$

Preliminary data

| V_{RSM} V | V_{RRM} V | Type |
|----------------|----------------|--------------|
| 900 | 800 | VBO 78-08NO7 |
| 1300 | 1200 | VBO 78-12NO7 |
| 1700 | 1600 | VBO 78-16NO7 |



| Symbol | Conditions | Maximum Ratings |
|-------------|---|-----------------------|
| I_{dAV} ① | $T_C = 100^\circ\text{C}$, module | 78 A |
| I_{FSM} | $T_{VJ} = 45^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz) | 750 A |
| | $V_R = 0$; $t = 8.3 \text{ ms}$ (60 Hz) | 820 A |
| | $T_{VJ} = T_{VJM}$; $t = 10 \text{ ms}$ (50 Hz) | 600 A |
| | $V_R = 0$; $t = 8.3 \text{ ms}$ (60 Hz) | 700 A |
| I^2t | $T_{VJ} = 45^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz) | 2800 A ² s |
| | $V_R = 0$; $t = 8.3 \text{ ms}$ (60 Hz) | 2820 A ² s |
| | $T_{VJ} = T_{VJM}$; $t = 10 \text{ ms}$ (50 Hz) | 2200 A ² s |
| | $V_R = 0$; $t = 8.3 \text{ ms}$ (60 Hz) | 2250 A ² s |
| T_{VJ} | | -40...+150 °C |
| T_{VJM} | | 150 °C |
| T_{stg} | | -40...+125 °C |
| V_{ISOL} | 50/60 Hz, RMS $t = 1 \text{ min}$ | 2500 V~ |
| | $I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$ | 3000 V~ |
| M_d | Mounting torque (M4) | 1.5 - 2 Nm |
| Weight | Typ. | 22 g |

Features

- Package with DCB ceramic base plate
- Isolation voltage 3000 V~
- Planar passivated chips
- Blocking voltage up to 1600 V
- Low forward voltage drop
- Leads suitable for PC board soldering
- UL registered E 72873


Applications

- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability
- Small and light weight

Dimensions in mm (1 mm = 0.0394")

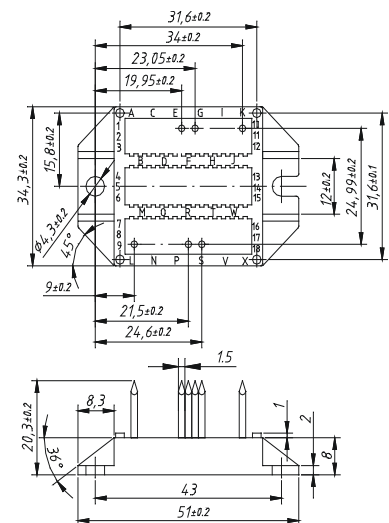

| Symbol | Conditions | Characteristic Values |
|------------|---|-----------------------|
| I_R | $V_R = V_{RRM}$ $T_{VJ} = 25^\circ\text{C}$ | $\leq 0.5 \text{ mA}$ |
| | $T_{VJ} = T_{VJM}$ | $\leq 5 \text{ mA}$ |
| V_F | $I_F = 150 \text{ A}$ $T_{VJ} = 25^\circ\text{C}$ | $\leq 1.6 \text{ V}$ |
| V_{T0} | For power-loss calculations only | 0.8 V |
| r_T | | 6 mΩ |
| R_{thJC} | per diode; DC current | 1.2 K/W |
| | per module | 0.3 K/W |
| R_{thCH} | per diode; DC current (typ.) | 1.5 K/W |
| | per module (typ.) | 0.375 K/W |
| d_s | Creeping distance on surface | 11.2 mm |
| d_A | Creepage distance in air | 9.7 mm |
| a | Max. allowable acceleration | 50 m/s ² |

Data according to IEC 60747 and refer to a single diode unless otherwise stated.

IXYS reserves the right to change limits, test conditions and dimensions.

20100706b