

Micro Commercial Components

Features

- High Reliability
- Low Current Leakage
- Metalurgically Bonded Construction
- Moisture Sensitivity Level 1
- Marking : Cathode band and type number
- Lead Free Finish/Rohs Compliant (Note1) ("P"Suffix designates Compliant. See ordering information)

ROHS

Phone: (818) 701-4933

CA 91311

Fax:

Micro Commercial Components

20736 Marilla Street Chatsworth


(818) 701-4939

Maximum Ratings

- Operating Temperature: -65℃ to +175℃
- Storage Temperature: -65[°]C to +175[°]C
- Maximum Thermal Resistance: 300K/W Junction To Ambient

Electrical Characteristics @ 25 $^\circ\mathrm{C}$ Unless Otherwise Specified

Reverse Voltage	V_{R}	75V	
Breakdown Voltage	V_{BR}	100V	I _R =100 μ A
Average Forward Current	lo	150mA	
Power Dissipation	P _{TOT}	500mW	
Junction Temperature	TJ	175 ℃	
Peak Forward Surge Current	I _{FSM}	2.0A	$t_p = 1.0 \ \mu s$
Maximum Instantaneous Forward Voltage	V _F	1.0V	I _{FM} = 10mA
Maximum DC Reverse Current At Rated DC Blocking Voltage	I _R	25nA 5.0μA 50μA	V_R =20V; T_J = 25°C V_R =75V; T_J = 25°C V_R =20V; T_J =150°C
Maximum Junction Capacitance	CJ	4.0pF	Measured at 1.0MHz, V _R =0V
Maximum Reverse Recovery Time	Trr	4.0ns	I_F =10mA; V_R = 6V R _L =100 Ω

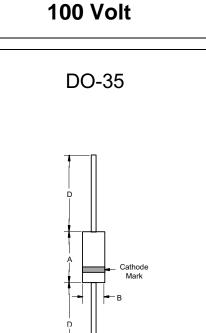


1N4148

500mW High Speed

Switching Diode



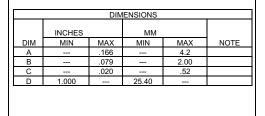

*Pulse test: Pulse width 300 µsec, Duty cycle 2%


Note: 1. Lead in Glass Exemption Applied, see EU Directive Annex 5.

www.mccsemi.com


Revision: A

1N4148




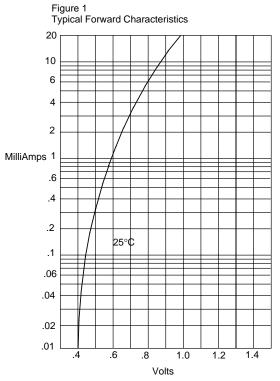

Instantaneous Forward Current - MilliAmperes *versus* Instantaneous Forward Voltage - Volts

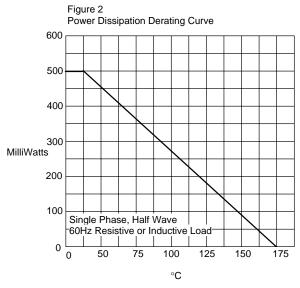

Admissable Power Dissipation - MilliWatts versus Junction Temperature - $^\circ\mathrm{C}$

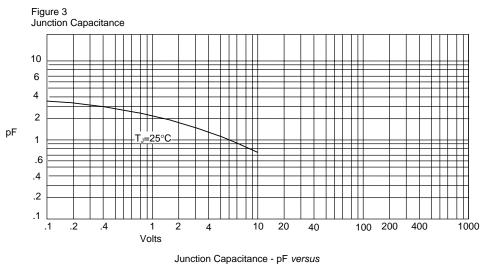


Reverse Voltage - Volts


www.mccsemi.com

Revision: A

1N4148



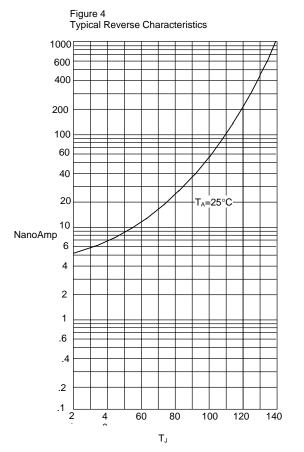

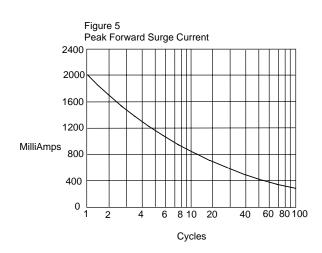

Peak Forward Surge Current - Amperes versus Number Of Cycles At 60Hz - Cycles

Instantaneous Reverse Leakage Current - NanoAmperes versus Junction Temperature - $^\circ\text{C}$

www.mccsemi.com

Revision: A



Ordering Information :

Device	Packing	
Part Number-TP	Tape&Reel: 10Kpcs/Reel	
Part Number-AP	Ammo Packing: 5Kpcs/Ammo Box	
Part Number-BP	Bulk: 100Kpcs/Carton	

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com