

Micro Commercial Components

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 Fax: (818) 701-4939


RB751G-40

Features

- Low Voltage, Low Inductance
- High Current Rectifier Schottky Diode
- For Power Supply
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Lead Free Finish/RoHS Compliant("P" Suffix designates RoHS Compliant. See ordering information)
- Marking: 5

Maximum Ratings Symbol Parameter Rating Unit V_{RM} Peak Reverse Voltage 40 V V_R DC Reverse Voltage 30 V Mean Rectifying Current 30 mΑ 6 Peak Forward Surge Current 200 mΑ IFSM ТJ Junction Temperature 125 °C -40 to +125 T_{STG} Storage Temperature °C

40 Volts Schottky Barrier Diode

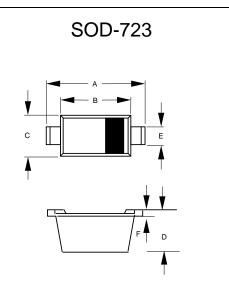

Electrical Characteristics @ 25°C Unless Otherwise Specified

| Symbol | Parameter | Min | Тур | Max | Units |
|------------------|------------|-----|-----|-----|-------|
| OFF CHARA | CTERISTICS | | | | |

| V _F | Forward Voltage (I _F =1mAdc) | | | 0.37 | Vdc |
|----------------|--|--|---|------|------|
| I _R | Reverse Current (V _R =30Vdc) | | | 0.5 | uAdc |
| C _T | C_{T} Capacitance between Terminals (V _R =1V, f=1MHz) | | 2 | | pF |

| DIMENSIONS | | | | | | |
|------------|--------|------|-------|------|------|--|
| | INCHES | | MM | | | |
| DIM | MIN | MAX | MIN | MAX | NOTE | |
| Α | .051 | .059 | 1.30 | 1.50 | | |
| В | .035 | .043 | 0.90 | 1.10 | | |
| С | .022 | .026 | 0.55 | 0.65 | | |
| D | .021 | .026 | 0.525 | 0.65 | | |
| E | .010 | .014 | 0.25 | 0.35 | | |
| F | .003 | .006 | 0.08 | 0.15 | | |
| | | | | | | |

www.mccsemi.com








Micro Commercial Components

Electrical characteristic curves (Ta = 25°C)

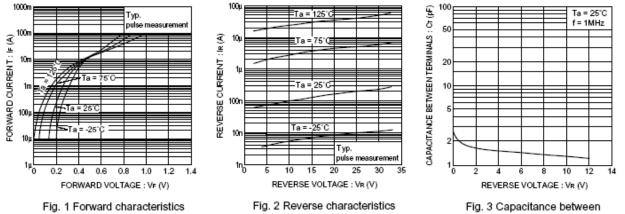

terminals characteristics

www.mccsemi.com



Ordering Information

| Device | Packing |
|------------------|---------------------|
| (Part Number)-TP | Tape&Reel8Kpcs/Reel |

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by Micro Commercial Components Corp. are not intended for use in Medical,

Aerospace or Military Applications.

www.mccsemi.com