
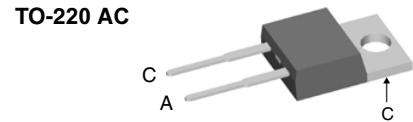


# Fast Recovery Epitaxial Diode (FRED)

**I<sub>FAV</sub>** = 14 A  
**V<sub>RRM</sub>** = 600 V  
**t<sub>rr</sub>** = 35 ns

V <sub>RSM</sub>	V <sub>RRM</sub>	Type
V	V	
640	600	DSEI 12-06A



A = Anode, C = Cathode

Symbol	Conditions	Maximum Ratings		
I <sub>FRMS</sub>	T <sub>VJ</sub> = T <sub>VJM</sub>	25	A	
I <sub>FAVM</sub> ①	T <sub>C</sub> = 100°C; rectangular, d = 0.5	14	A	
I <sub>FRM</sub>	t <sub>p</sub> < 10 µs; rep. rating, pulse width limited by T <sub>VJM</sub>	150	A	
I <sub>FSM</sub>	T <sub>VJ</sub> = 45°C; t = 10 ms (50 Hz), sine	100	A	
	t = 8.3 ms (60 Hz), sine	110		
	T <sub>VJ</sub> = 150°C; t = 10 ms (50 Hz), sine	85	A	
	t = 8.3 ms (60 Hz), sine	95		
I <sup>2</sup> t	T <sub>VJ</sub> = 45°C; t = 10 ms (50 Hz), sine	50	A <sup>2</sup> s	
	t = 8.3 ms (60 Hz), sine	50		
	T <sub>VJ</sub> = 150°C; t = 10 ms (50 Hz), sine	36	A <sup>2</sup> s	
	t = 8.3 ms (60 Hz), sine	37		
T <sub>VJ</sub>		-40...+150	°C	
T <sub>VJM</sub>		150	°C	
T <sub>stg</sub>		-40...+150	°C	
P <sub>tot</sub>	T <sub>C</sub> = 25°C	62	W	
M <sub>d</sub>	mounting torque	0.4...0.6	Nm	
Weight	typical	2	g	

Symbol	Conditions	Characteristic Values		
		typ.	max.	
I <sub>R</sub>	V <sub>R</sub> = V <sub>RRM</sub> V <sub>R</sub> = 0.8 · V <sub>RRM</sub> V <sub>R</sub> = 0.8 · V <sub>RRM</sub>	T <sub>VJ</sub> = 25°C T <sub>VJ</sub> = 25°C T <sub>VJ</sub> = 125°C	50 25 3	µA µA mA
V <sub>F</sub>	I <sub>F</sub> = 16 A	T <sub>VJ</sub> = 150°C T <sub>VJ</sub> = 25°C	1.5 1.7	V V
V <sub>TO</sub>	For power-loss calculations only		1.12 23.2	V mΩ
r <sub>T</sub>	T <sub>VJ</sub> = T <sub>VJM</sub>			
R <sub>thJC</sub> R <sub>thCH</sub> R <sub>thJA</sub>		0.5	2 60	K/W K/W K/W
t <sub>rr</sub>	I <sub>F</sub> = 1 A; -di/dt = 50 A/µs; V <sub>R</sub> = 30 V; T <sub>VJ</sub> = 25°C	35	50	ns
I <sub>RM</sub>	V <sub>R</sub> = 350 V; I <sub>F</sub> = 12 A; -di <sub>F</sub> /dt = 100 A/µs L ≤ 0.05 µH; T <sub>VJ</sub> = 100°C	4	4.4	A

① I<sub>FAVM</sub> rating includes reverse blocking losses at T<sub>VJM</sub>, V<sub>R</sub> = 0.8 · V<sub>RRM</sub>, duty cycle d = 0.5  
Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions.

© 2004 IXYS All rights reserved

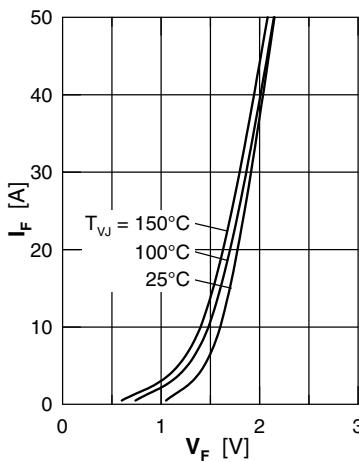


Fig. 1 Forward current versus voltage drop

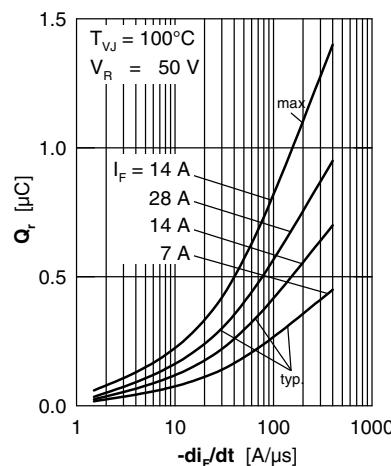
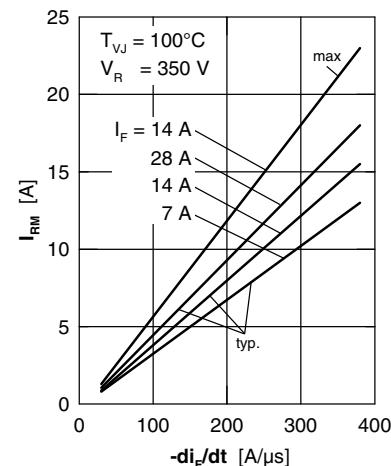
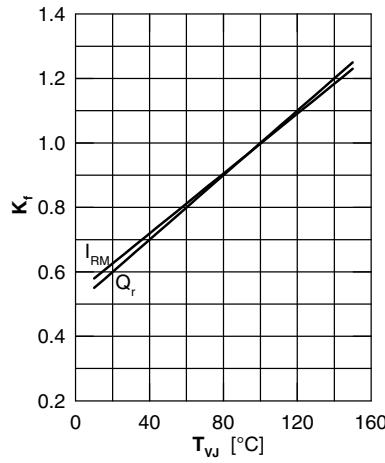
Fig. 2 Recovery charge versus  $-di_F/dt$ Fig. 3 Peak reverse current versus  $-di_F/dt$ 

Fig. 4 Dynamic parameters versus junction temperature

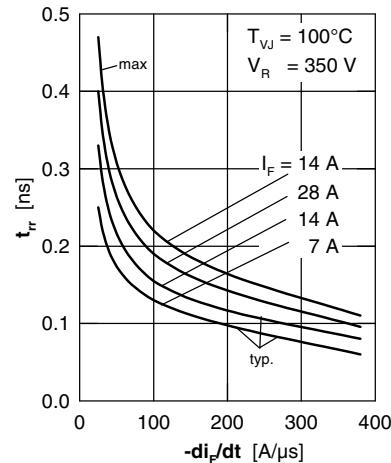
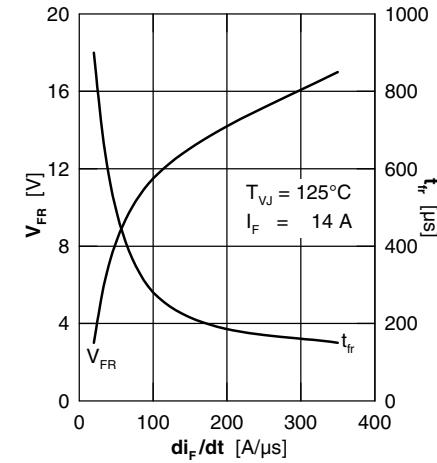
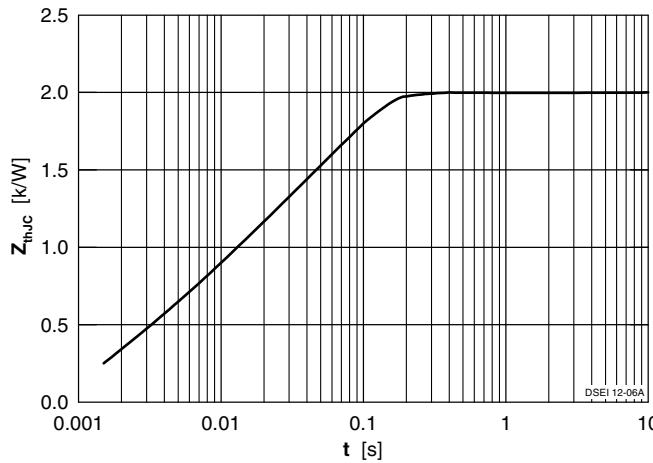
Fig. 5 Recovery time versus  $-di_F/dt$ Fig. 6 Peak forward voltage versus  $di_F/dt$ 

Fig. 7 Transient thermal resistance junction to case


IXYS reserves the right to change limits, test conditions and dimensions.

© 2004 IXYS All rights reserved

2007/004

2 - 3

Dimensions TO-220 AC

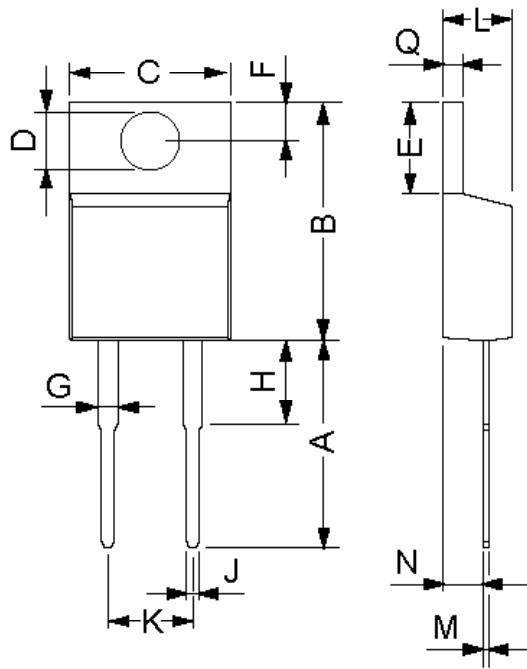

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	12.7	14.73	0.5	0.58
B	14.23	16.51	0.56	0.65
C	9.66	10.66	0.38	0.42
D	3.54	4.08	0.139	0.161
E	5.85	6.85	2.3	0.42
F	2.54	3.42	0.1	0.135
G	1.15	1.77	0.045	0.07
H	-	6.35	-	0.25
J	0.64	0.89	0.025	0.035
K	4.83	5.33	0.19	0.21
L	3.56	4.82	0.14	0.19
M	0.51	0.76	0.02	0.03
N	2.04	2.49	0.08	0.115
Q	0.64	1.39	0.025	0.055

IXYS reserves the right to change limits, test conditions and dimensions.

© 2004 IXYS All rights reserved

2007/004

3 - 3